

JetStor[®]
Storage. Solutions. Support.

JetStor Document - User Manual

JetStor SAS 724iF(D) V2
JetStor SAS 724HS(D) 10G V2

Version 8.52
October 2014

Copyright

Copyright@ 1994~2015, Advanced Computer & Network Corporation. All rights reserved. No part of this document may be reproduced or transmitted without written permission from Advanced Computer & Network Corporation.

Trademarks

All products and trade names used in this manual are trademarks or registered trademarks of their respective companies.

Firmware Versions

JetStor 724iF(D) V2 / 724HS(D) 10G V2 Series: FW 1.3.0
Storage Service Provider: V2.0.6

Login Information

Management IP Address:
192.168.1.234 User Name: admin
Password: 00000000

Advanced Computer & Network Corp.

5001 Baum Blvd, Ste 680
Pittsburgh, PA 15213

Tel: 412-683-9010
Fax: 412-683-9070

Email: support@acnc.com
Website: www.acnc.com

0

Preface

About This Manual

This manual is the introduction of JetStor storage system and it aims to help users know the operations of the disk array system easily. Information contained in this manual has been reviewed for accuracy, but not for product warranty because of the various environments / OS / settings. Information and specification will be changed without further notice. For any update information, please visit www.acnc.com and your contact windows.

Before reading this manual, it assumes that you are familiar with computer skills such as hardware, storage concepts and network technology. It also assumes you have basic knowledge of Redundant Array of Independent Disks (RAID), Storage Area Network (SAN), Fibre Channel (FC), Internet SCSI (iSCSI), Serial-attached SCSI (SAS), Serial ATA (SATA), technology.

**CAUTION:**



Do not attempt to service, change, disassemble or upgrade the equipment's components by yourself. Doing so may violate your warranty and expose you to electric shock. Refer all servicing to authorized service personnel. Please always follow the instructions in this user's manual.

Technical Support

Thank you for using JetStor products; if you have any question, please e-mail to support@acnc.com. We will answer your question as soon as possible.

Tips and Cautions

This manual uses the following symbols to draw attention to important safety and operational information.

| Symbol | Meaning | Description |
|-----------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------------------------------|
|  | TIP | Tips provide helpful information, guidelines, or suggestions for performing tasks more effectively. |
|  | CAUTION | Cautions indicate that failure to take a specified action could result in damage to the software or hardware. |

Conventions

The following table describes the typographic conventions used in this manual.

| Conventions | Description |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bold | Indicates text on a window, other than the window title, including menus, menu options, buttons, fields, and labels. Example: Click OK button. |
| <i><Italic></i> | Indicates a variable, which is a placeholder for actual text provided by the user or system. Example: copy <i><source-file></i> <i><target-file></i> . |
| [] square brackets | Indicates optional values. Example: [a b] indicates that you can choose a, b, or nothing. |
| { } braces | Indicates required or expected values. Example: { a b } indicates that you must choose either a or b. |
| vertical bar | Indicates that you have a choice between two or more options or arguments. |
| / Slash | Indicates all options or arguments. |
| underline | Indicates the default value. Example: [a b] |

FCC and CE statements

FCC Statement

This device has been shown to be in compliance with and was tested in accordance with the measurement procedures specified in the Standards and Specifications listed below and as indicated in the measurement report number: xxxxxxxx-F

Technical Standard: FCC Part 15 Class A (Verification)
 IC ICES-003

CE Statement

This device has been shown to be in compliance with and was tested in accordance with the measurement procedures specified in the Standards and Specifications listed below and as indicated in the measurement report number: xxxxxxxx-E

Technical Standard: EMC DIRECTIVE 2004/108/EC
 (EN55022 / EN55024)

UL Statement

Rack Mount Instructions - The following or similar rack-mount instructions are included with the installation instructions:

1. Elevated Operating Ambient - If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature (Tma) specified by the manufacturer.
2. Reduced Air Flow - Installation of the equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised.
3. Mechanical Loading - Mounting of the equipment in the rack should be such that a hazardous condition is not achieved due to uneven mechanical loading.
4. Circuit Overloading - Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.
5. Reliable Earthing - Reliable earthing of rack-mounted equipment should be maintained. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g. use of power strips).



CAUTION:

The main purpose of the handles is for rack mount use only. Do not use the handles to carry or transport the systems.

The ITE is not intended to be installed and used in a home, school or public area accessible to the general population, and the thumbscrews should be tightened with a tool after both initial installation and subsequent access to the panel.

Warning: Remove all power supply cords before service

This equipment intended for installation in restricted access location.

- Access can only be gained by SERVICE PERSONS or by USERS who have been instructed about the reasons for the restrictions applied to the location and about any precautions that shall be taken.
- Access is through the use of a TOOL or lock and key, or other means of security, and is controlled by the authority responsible for the location.



CAUTION: (English)

Risk of explosion if battery is replaced by incorrect type. Please replace the same or equivalent type battery use and dispose of used batteries according to the instructions.

ATTENTION: (French)

IL Y A RISQUE D'EXPLOSION SI LA BATTERIE EST REMPLACÉE PAR UNE BATTERIE DE TYPE INCORRECT. METTRE AU REBUT LES BATTERIES USAGÉES CONFORMÉMENT AUX INSTRUCTIONS.

VORSICHT: (German)

Explosionsgefahr bei unsachgemäßem Austausch der Batterie. Entsorgung gebrauchter Batterien nach Anleitung.

ADVERTENCIA: (Spanish)

Las baterías pueden explotar si no se manipulan de forma apropiada. No desmonte ni tire las baterías al fuego. Siga las normativas locales al desechar las baterías agotadas.

警告: (Simplified Chinese)

本電池如果更換不正確會有爆炸的危險，請依製造商說明處理用過之電池。

警告: (Traditional Chinese)

本電池如果更換不正確會有爆炸的危險，請依製造商說明處理用過之電池。

Contents

| | | |
|------------------|------------------------------------------|-----------|
| Chapter 0 | PREFACE..... | 3 |
| | ABOUT THIS MANUAL | 3 |
| | TECHNICAL SUPPORT | 3 |
| | TIPS AND CAUTIONS | 3 |
| | CONVENTIONS..... | 4 |
| | FCC AND CE STATEMENTS..... | 4 |
| Chapter 1 | OVERVIEW | 12 |
| | PRODUCT OVERVIEW..... | 12 |
| | Model Comparison..... | 13 |
| | Package Contents..... | 15 |
| | HARDWARE | 16 |
| | Front View..... | 17 |
| | Disk Drive Assembly | 22 |
| | 3TB / 6G MUX Board Limitation..... | 26 |
| | Rear View | 27 |
| | RAID CONCEPTS..... | 39 |
| | RAID Levels..... | 39 |
| | Volume Relationship | 40 |
| | FIBRE CHANNEL CONCEPTS | 40 |
| | ISCSI CONCEPTS..... | 41 |
| | SAS CONCEPTS | 42 |
| Chapter 2 | INSTALLATION..... | 44 |
| | INSTALLATION OVERVIEW | 44 |
| | Drive Slot Numbering..... | 45 |
| | System Installation and Deployment | 46 |
| | POWER ON / OFF..... | 60 |
| | Power on the System | 60 |
| | Power off the System..... | 60 |
| Chapter 3 | QUICK SETUP..... | 63 |

| | |
|----------------------------------------------|-----------|
| MANAGEMENT INTERFACES | 63 |
| Serial Console..... | 63 |
| Secure Shell Remote Access..... | 63 |
| LCM | 64 |
| Web UI | 66 |
| HOW TO USE THE GUIDED CONFIGURATIONS | 68 |
| Quick Installation Tool | 69 |
| Volume Creation Wizard..... | 74 |
| Chapter 4 BASIC CONFIGURATION | 78 |
| INTERFACE HIERARCHY..... | 78 |
| SYSTEM CONFIGURATION | 79 |
| System Settings..... | 79 |
| Network Settings..... | 80 |
| Login Settings..... | 81 |
| Email Notification Settings..... | 82 |
| Log and Alert Settings | 83 |
| HOST PORT / ISCSI CONFIGURATION..... | 85 |
| Network Setup | 85 |
| Entity and iSCSI Settings..... | 89 |
| iSCSI Nodes | 89 |
| Active Sessions..... | 93 |
| CHAP Accounts..... | 94 |
| Fibre Channel | 95 |
| VOLUME CONFIGURATION..... | 98 |
| Physical Disks | 98 |
| RAID Groups..... | 100 |
| Virtual Disks | 105 |
| Snapshots..... | 109 |
| Logical Units..... | 112 |
| QReplicas | 114 |
| ENCLOSURE MANAGEMENT | 116 |
| Hardware Monitor | 116 |
| UPS..... | 118 |
| SES..... | 119 |
| S.M.A.R.T..... | 120 |
| SYSTEM MAINTENANCE..... | 120 |
| System Information..... | 120 |

| | |
|---------------------------------------------------------------------------|------------|
| Event log | 122 |
| Upgrade | 123 |
| Firmware Synchronization (Only available in Dual controller models) | 124 |
| Reset to Factory Defaults | 125 |
| Configuration Backup..... | 125 |
| Volume Restoration | 126 |
| Reboot and Shutdown | 127 |
| PERFORMANCE MONITOR | 128 |
| Disk..... | 128 |
| iSCSI..... | 128 |
| Fibre Channel | 129 |
| Chapter 5 ADVANCED OPERATIONS | 130 |
| VOLUME REBUILD | 130 |
| MIGRATE AND MOVE RAID GROUPS..... | 131 |
| EXTEND VIRTUAL DISKS | 133 |
| QTHIN..... | 134 |
| The Benefits of QThin..... | 135 |
| Features Highlight | 136 |
| QThin Options | 138 |
| Thin Provisioning Case | 139 |
| DISK ROAMING..... | 140 |
| JBOD EXPANSION..... | 140 |
| Connecting JBOD..... | 140 |
| Upgrade Firmware | 142 |
| MPIO AND MC/S | 142 |
| MPIO | 142 |
| MC/S | 143 |
| Difference | 144 |
| TRUNKING AND LACP..... | 144 |
| LACP | 144 |
| Trunking | 145 |
| DUAL CONTROLLERS | 146 |
| Perform I/O | 146 |
| Ownership..... | 147 |
| Controller Status | 147 |
| Change Controller Mode..... | 148 |
| Recommend iSNS Server..... | 148 |

| | |
|----------------------------------------|------------|
| SNAPSHOTS | 148 |
| Take a Snapshot | 149 |
| Cleanup Snapshots | 150 |
| Schedule Snapshots | 151 |
| Rollback | 151 |
| Snapshot Constraint | 152 |
| CLONE | 154 |
| Setup Clone | 154 |
| Start and Stop Clone | 155 |
| Schedule Clone | 155 |
| Cloning Options | 156 |
| Clear Clone | 157 |
| Clone Constraint | 157 |
| QREPLICAS | 158 |
| Create QReplica Task | 159 |
| Start and Stop QReplica Task | 162 |
| MPIO | 162 |
| MC/S | 163 |
| Task Shaping | 163 |
| Schedule QReplica Task | 164 |
| QReplica Options | 165 |
| Delete QReplica Task | 166 |
| Clone Transfers to QReplica | 166 |
| FAST REBUILD | 169 |
| Solution | 169 |
| Configuration | 170 |
| Constraint | 170 |
| SSD CACHING | 171 |
| Solution | 171 |
| Methodology | 171 |
| Populating the Cache | 172 |
| Read/Write Cache Cases | 172 |
| I/O Type | 174 |
| Configuration | 176 |
| Constraint | 177 |
| Chapter 6 TROUBLESHOOTING | 178 |
| SYSTEM BUZZER | 178 |

| | |
|---------------------------------------|------------|
| EVENT NOTIFICATIONS..... | 178 |
| GLOSSARY AND ACRONYM LIST..... | 199 |
| INDEX | 201 |

1

Overview

Product Overview

This user manual describes how to set up and use the JetStor storage systems.

JetStor 724iF(D) V2 / 724HS(D) 10G V2 Series:



The storage array provides a flexible, intelligent, storage area network (SAN) solution for virtualized server environments and the growing demand for data storage. JetStor storage systems can provide non-stop service with a high degree of fault tolerance by using JetStor RAID technology and advanced array management features.

Model Comparison

- **724HS(D) 10G V2:** 2 x 10GbE iSCSI ports (SFP+) + 2 x GbE iSCSI ports per controller.
- **724iF(D) V2:** 2 x 8Gb Fibre Channel ports (SFP+) + 2 x GbE iSCSI ports per controller.

| Host Interface | 4U24 |
|-------------------------------------------|-----------------|
| 2 x 10GbE iSCSI (SFP+) + 2 x GbE iSCSI | 724HS(D) 10G V2 |
| 2 x 8Gb FC (SFP+) + 2 x GbE iSCSI | 724iF(D) V2 |

Package Contents

The package contains the following items:

- JetStor storage system (x1)
- HDD trays (x24)
- Power cords (x3)
- LCM with USB (x1)
- Rail kit (x1 set)
- Keys, screws for drives and rail kit (x1 packet)


Hardware

This section provides basic information about the hardware components.




Front View

There is a power switch button at the right front handle; a LCM with the USB interface at the left front handle.

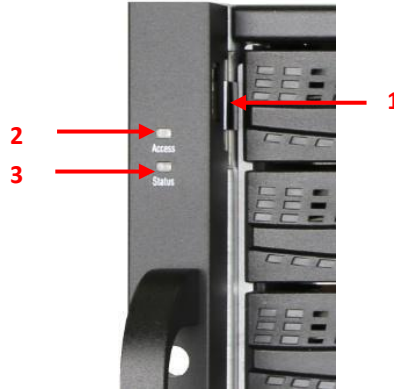

| Number | Description |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | USB port: This is designed specifically for USB LCM usage. It DOES NOT offer external USB storage function. |
| 2 | Access LED: This indicates the host interface (frontend) connectivity, not the hard drive activity. Please be aware. <ul style="list-style-type: none"> • Blink: There is host interface activity (data I/O or management). • OFF: There is no host interface activity. |
| 3 | Status LED: <ul style="list-style-type: none"> • Red: System failure. • Off: System OK. |

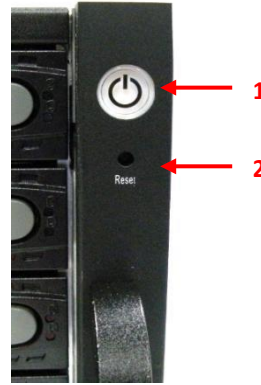

| Number | Description |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Power button and power LED: <ul style="list-style-type: none"> • Blue: Power ON. • Off: Power OFF. |
| 2 | Reset button: Press within 2 seconds to reset the system to default settings. The default resets include: <ul style="list-style-type: none"> • Management IP Address: 192.168.1.234 • User Name: admin • Password: 00000000 |

USB LCM comes as an optional device. The standard SKU doesn't include USB LCM. Both the USB port on the front left handle and the USB port on the controller itself support LCM function. However, the USB port doesn't support external USB storage function.



| Number | Description |
|--------|----------------------|
| 1 | LCD display. |
| 2 | Up button. |
| 3 | Down button. |
| 4 | ENT (Enter) button. |
| 5 | ESC (Escape) button. |
| 6 | MUTE button. |
| 7 | USB connector |

Disk Drive Assembly

Remove a drive tray. Then install a HDD.

- To install SAS drives: align the edge of the drive to the back end of tray; the backplane can directly connect to the drives.
- To install SATA drives with 3G/6G MUX boards: align the board edge to the back end of tray; the backplane can connect the drives through the boards.



SAS Drive



SATA Drive

The front of each disk tray has four components:



This table provides details about the front components of a disk tray.

| Number | Description |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Power LED: <ul style="list-style-type: none"> Green: Drive is inserted and good. Red: Drive fails. Off: No drive in the tray. |
| 2 | Access LED: <ul style="list-style-type: none"> Blue blinking: The drive is being accessed. Off: The drive is not being accessed or no drive in the tray. |
| 3 | Tray removal handle. |
| 4 | Latch to release the tray. |


3TB / 6G MUX Board Limitation

| System | | |
|-----------------------|-------------------|--------------|
| | Single upgradable | Dual |
| <= 2TB SATA | No | 6G MUX board |
| > 2TB SATA | No | 6G MUX board |
| <= 2TB SAS | No | No |
| > 2TB SAS | No | No |

| HDD Type | 6G MUX Board | 3G MUX Board |
|-------------------|--------------|--------------|
| 3TB | 2794 GB | 2794 GB |
| SATA | SATA 6Gb/s | SATA 3Gb/s |
| | SATA 3Gb/s | SATA 3Gb/s |
| | SATA 1.5Gb/s | SATA 1.5Gb/s |
| | SATA 6Gb/s | |
| Without MUX Board | | |
| 3TB | 2794 GB | |
| SAS | SAS 6Gb/s | |
| | SAS 3Gb/s | |

Rear View

4U24 chassis:

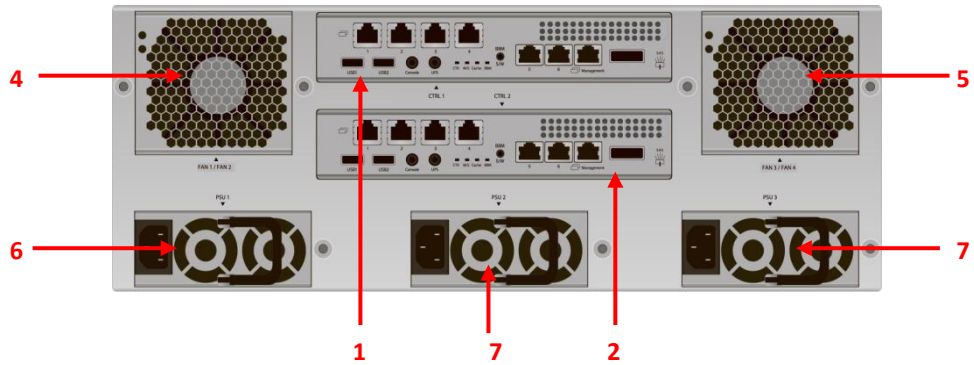

This table describes the rear modules.

| Number | Description |
|--------|--------------------------------------------------------------------------------------------|
| 1 | Controller 1 (CTRL 1). |
| 2 | Controller 2 (CTRL 2, only for dual-controller). |
| 3 | Power Switch <ul style="list-style-type: none"> • : ON. • O: OFF. |
| 4 | Fan Module (FAN1 / FAN2). |
| 5 | Fan Module (FAN3 / FAN4). |
| 6 | Power Supply Unit (PSU1). |
| 7 | Power Supply Unit (PSU2). |
| 8 | Power Supply Unit (PSU3). |
| 9 | Fan Module (FAN A). |
| 10 | Fan Module (FAN B). |
| 11 | SAS JBOD expansion port. |

This table describes the rear components.

| Number | Description |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | SAN ports (depending on model): <ul style="list-style-type: none"> • 724HS(D) 10G V2: 2 x 10GbE iSCSI ports (SFP+) + 2 x GbE iSCSI ports. • 724iF(D) V2: 2 x 8Gb Fibre Channel ports + 2 x GbE iSCSI ports. |
| 2 | LED (from left to right): Controller health LED: <ul style="list-style-type: none"> • Green: Controller status normal. • Red: System booting or controller failure. Master slave LED (only for dual controllers): <ul style="list-style-type: none"> • Green: This is the Master controller. • Off: This is the Slave controller. Dirty cache LED: <ul style="list-style-type: none"> • Orange: Data on the cache waiting for flush to disks. • Off: No data on the cache. BBM LED (when status button pressed): <ul style="list-style-type: none"> • Green: BBM installed and powered. • Off: No BBM installed. |
| 3 | BBM status button (used to check the battery when the power is off): <ul style="list-style-type: none"> • <u>If the BBM LED shows Green, then the BBM still has power to keep</u> |
| | data on the cache. <ul style="list-style-type: none"> • If the BBM LED stays Off, then the BBM power has run out and it cannot provide power for the cache anymore. It needs to be recharged or replaced. |
| 4 | Management port. |
| 5 | Console port. |
| 6 | RS 232 port for UPS. |
| 7 | SAS JBOD expansion port. |
| 8 | BBM slot. |
| 9 | USB <ul style="list-style-type: none"> • <u>No function. Reserved for the future design purpose.</u> |

LED

1GbE Link LED:

- Orange: Asserted when a 1G link is established and maintained.
- Green: Asserted when a 100M link is establish and maintained.

1GbE Access LED:

- Blinking green: Asserted when the link is established and packets are being transmitted along with any receive activity.

8G FC Link LED:

- Blue: Asserted when an 8G link is established and maintained.
- Amber: Asserted when a 4G and below link is established and maintained.

8G FC Access / fail LED:

- Green: Asserted when the link is establish.
- Blinking green: Asserted when the link is established and packets are being transmitted along with any receive activity.
- Red: Asserted when the link can't establish.

8G FC Link LED:

- Blue: Asserted when an 8G link is established and maintained.
- Yellow: Asserted when a 4G link is established and maintained.
- Blinking yellow: Asserted when a 2G link is established and maintained.

8G FC Access / fail LED:

- Green: Asserted when the link is establish.
- Blinking green: Asserted when the link is established and packets are being transmitted along with any receive activity.
- Red: Asserted when the link can't establish.

10GbE Link LED:

- Orange: Asserted when a 1G link is established and maintained.
-

- Blue: Asserted when a 10G link is establish and maintained.
- 10GbE Access LED:
- Yellow: Asserted when the link is established and packets are being transmitted along with any receive activity.




CAUTION:

Be aware that when Controller Health LED is in RED, please DO NOT unplug the controller from the system or turn off the power suddenly. This may cause unrecoverable damage, which will not be covered by warranty.

724HS(D) 10G V2 (2 x 10GbE iSCSI (SFP+) + 2 x GbE iSCSI) controller:



724iF(D) V2 (2 x 8G FC (SFP+) + 2 x GbE iSCSI) controller:

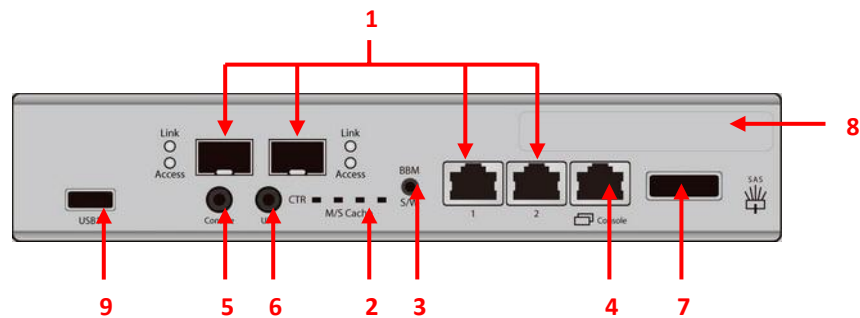

RAID Concepts

RAID is the abbreviation of Redundant Array of Independent Disks. The basic idea of RAID is to combine multiple drives together to form one large logical drive. This RAID drive obtains performance, capacity and reliability than a single drive. The operating system detects the RAID drive as a single storage device.


RAID Levels

There are various RAID levels with different degrees of data protection, data availability, and performance. A description of supported RAID levels follow:

| Type | Description | Min. No. of Drives |
|--------------|----------------------------------------------------------|--------------------|
| RAID 0 | Disk striping. | 1 |
| RAID 1 | Disk mirroring over two disks. | 2 |
| N-way mirror | Extension to RAID 1 level. It has N copies of the disk. | N |
| RAID 3 | Striping with parity on the dedicated disk. | 3 |
| RAID 5 | Striping with interspersed parity over the member disks. | 3 |
| RAID 6 | 2-dimensional parity protection over the member disks. | 4 |
| RAID 0+1 | Mirroring of the member RAID 0 volumes. | 4 |
| RAID 10 | Striping over the member RAID 1 volumes. | 4 |
| RAID 30 | Striping over the member RAID 3 volumes. | 6 |
| RAID 50 | Striping over the member RAID 5 volumes. | 6 |
| RAID 60 | Striping over the member RAID 6 volumes. | 8 |
| JBOD | The abbreviation of Just a Bunch Of Disks. Independently | 1 |

Volume Relationship


The following graphic is the volume structure which JetStor has designed. It describes the relationship of RAID components.

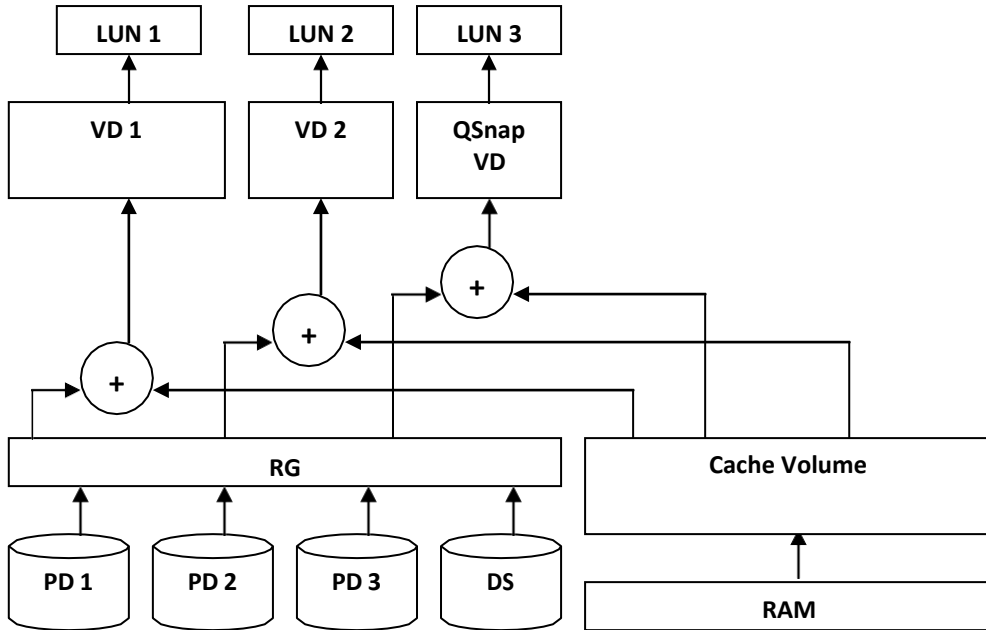

One RG (RAID group) consists of a set of VDs (Virtual Disk) and owns one RAID level attribute. Each RG can be divided into several VDs. The VDs in one RG share the same RAID level, but may have different volume capacity. All VDs share the CV (Cache Volume) to execute the data transaction. LUN (Logical Unit Number) is a unique identifier, in which users can access through SCSI commands.

Fibre Channel Concepts

Fibre channel started use primarily in the supercomputer field, but has become the standard connection type for storage area networks (SAN) in enterprise storage.

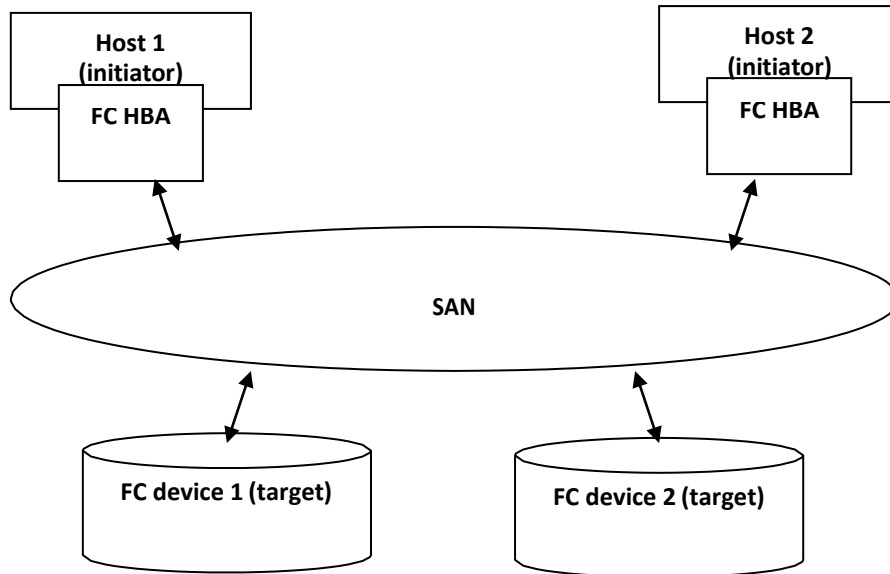


The target is the storage device itself or an appliance which controls and serves volumes or virtual volumes. The target is the device which performs SCSI commands or bridges to an attached storage device.

iSCSI Concepts

iSCSI (Internet SCSI) is a protocol which encapsulates SCSI (Small Computer System Interface) commands and data in TCP/IP packets for linking storage devices with servers over common IP infrastructures. iSCSI provides high performance SANs over standard IP networks like LAN, WAN or the Internet.

IP SANs are true SANs (Storage Area Networks) which allow several servers to attach to an infinite number of storage volumes by using iSCSI over TCP/IP networks. IP SANs can scale the storage capacity with any type and brand of storage system. In addition, it can be used by any type of network (Ethernet, Fast Ethernet, Gigabit Ethernet, and 10 Gigabit Ethernet) and combination of operating systems (Microsoft Windows, Linux, Solaris, Mac, etc.) within the SAN network. IP-SANs also include mechanisms for security, data replication, multi-path and high availability.

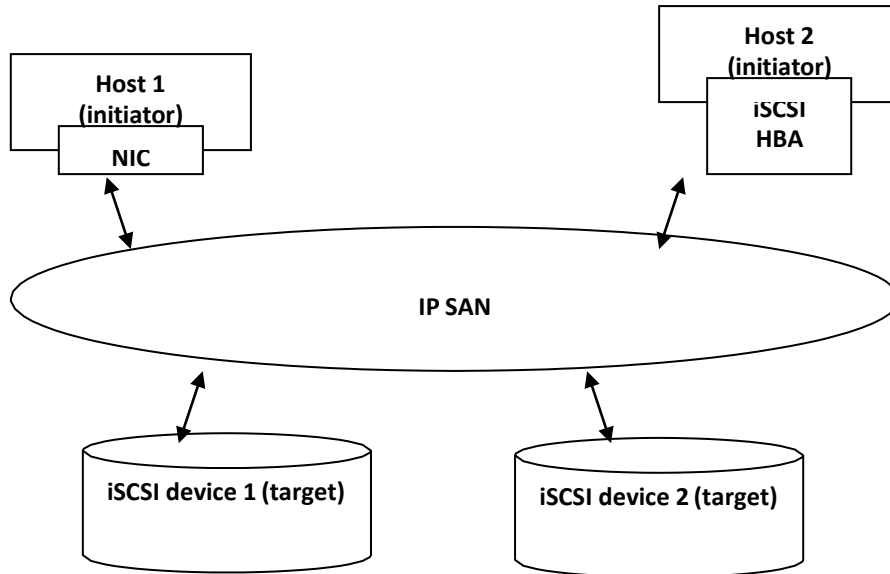


Storage protocol, such as iSCSI, has “two ends” in the connection. These ends are initiator and target. In iSCSI, we call them iSCSI initiator and iSCSI target. The iSCSI initiator requests or initiates any iSCSI communication. It requests all SCSI operations like read or write. An initiator is usually located on the host side (either an iSCSI HBA or iSCSI SW initiator).

The target is the storage device itself or an appliance which controls and serves volumes or virtual volumes. The target is the device which performs SCSI command or bridge to an attached storage device.

SAS Concepts

Serial-attached SCSI offers advantages over older parallel technologies. The cables are thinner, and the connectors are less bulky. Serial data transfer allows the use of longer cables than parallel data transfer.

The target is the storage device itself or an appliance which controls and serves volumes or virtual volumes. The target is the device which performs SCSI command or bridge to an attached storage device.

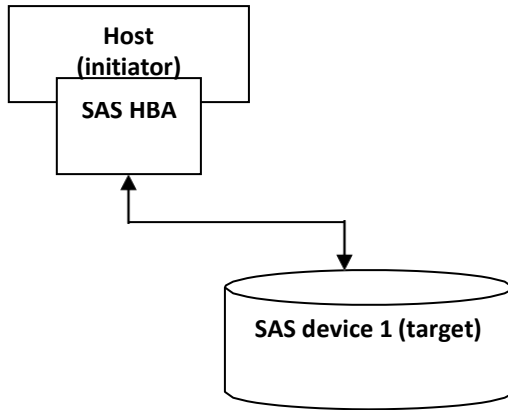

2

Installation

Installation Overview

Before starting, prepare the following items:

- A management computer with a Gigabit Ethernet NIC (recommend) on the same network as the JetStor storage system.
- Connection cables:
 - **All:** Use CAT 5e, or CAT 6 (recommend) network cables for the management port.
 - **All:** Fibre Channel cables or AOCs (Active Optic Cable).
- Prepare a storage system configuration plan by the network administrator. The plan should include network information for the management port and iSCSI data ports. If using static IP addresses, please prepare a list of the static IP addresses, the subnet mask, and the default gateway.
- Switches:
 - **All:** Gigabit switches (optional) for connecting management port.
 - **All:** Gigabit switches (recommended). Or Gigabit switches with VLAN / LCAP / Trunking (optional).
 - **724HS(D) 10G V2:** 10 Gigabit switches with VLAN / LCAP / Trunking (optional).

- **724iF(D) V2:** Fibre Channel switches (optional).
- CHAP security information, including CHAP username and secret (optional).
- For dual-controller systems, it is recommended that the host logon to the target twice (both Controller 1 and Controller 2), and then the MPIO should setup automatically.
- For an iSCSI dual-controller system, install an iSNS server on the same storage area network (recommended).

Drive Slot Numbering

The drives can be installed into any slot in the enclosure. Slot numbering is reflected in Web UI.

4U24:

| | | | |
|--------|---------|---------|---------|
| Slot 1 | Slot 7 | Slot 13 | Slot 19 |
| Slot 2 | Slot 8 | Slot 14 | Slot 20 |
| Slot 3 | Slot 9 | Slot 15 | Slot 21 |
| Slot 4 | Slot 10 | Slot 16 | Slot 22 |
| Slot 5 | Slot 11 | Slot 17 | Slot 23 |
| Slot 6 | Slot 12 | Slot 18 | Slot 24 |

System Installation and Deployment

Using the following instructions to install and deploy the storage system.

- Install BBM (Battery Backup Module). BBM is not attached to the controller cage.
 - BBM module is located between two controller cages.

BBM module is inserted into the system chassis and connected to the backplane.



- Release the screws. Plug in the BBM. And then secure the bracket with screws.



TIP:
The BBM supports controller 1 only.

- At the rear, check that the Master Controller is in its slot (CTRL 1).
- If desired, install the optional Slave Controller in its slot (CTRL 2, only for dual-controller).



CAUTION:

When running on dual controller mode, please make sure both controllers have the same DIMM on each corresponding memory slot. Failing to do so will result in controller malfunction, which will not be covered by warranty.

- Install the Rail Kit onto the unit and insert it into the rack.
-




CAUTION:


The system is very heavy. It's recommend that a mechanical lifter or at least two persons be used to raise and align the system to prevent injury during installation. Use care when inserting or removing a system into or out of a rack to prevent the accidental tipping or the rack causing damage or personal injury.

- Install the Disk Drives.
- Connect the management port cable and data port cables on the network plan, the topology examples are on the following.

JetStor 724HS(D) 10G V2:

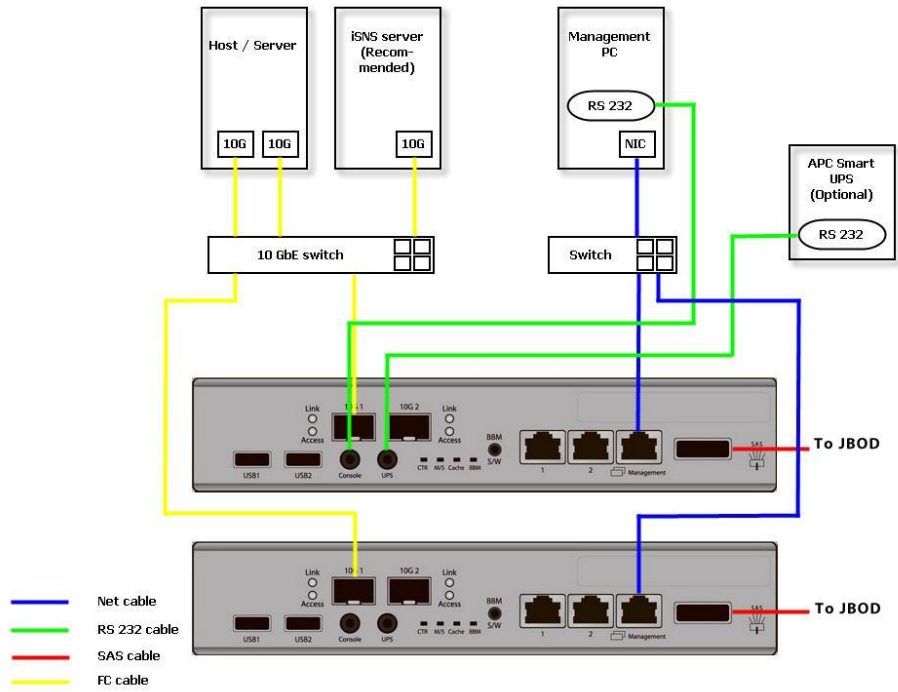


JetStor 724iF(D) V2:

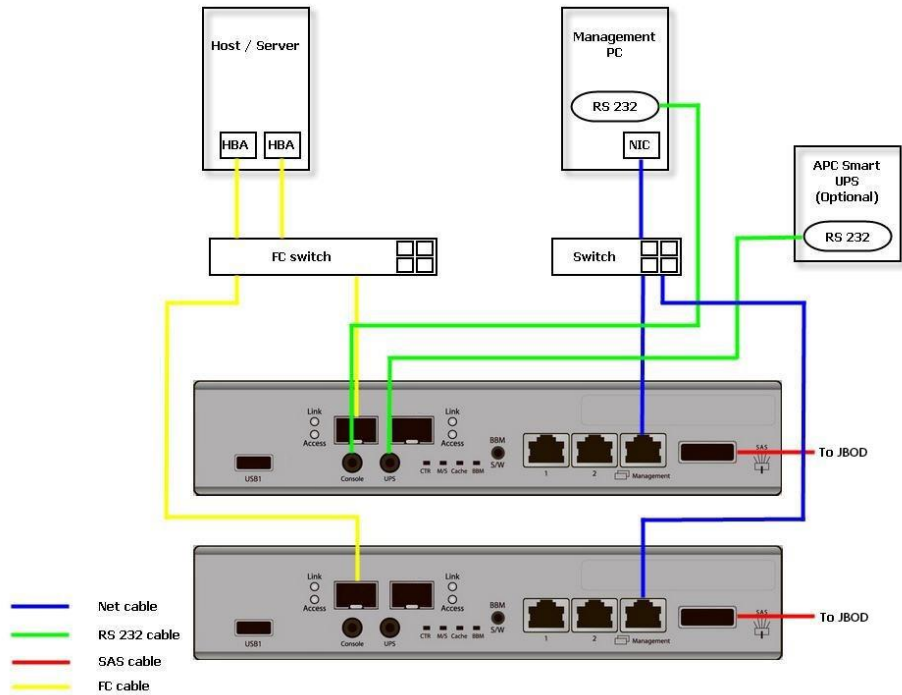


Dual controller topology:

For a better data service availability, all the connections among hosts, switches, and the dual controllers are recommended as redundant as below.

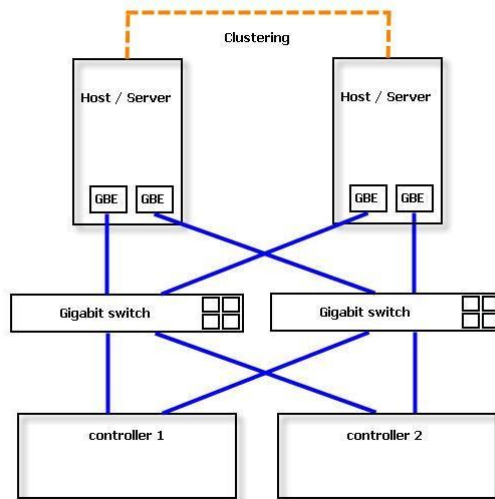

Console and UPS topology:

Connect the console cable and UPS as the following.

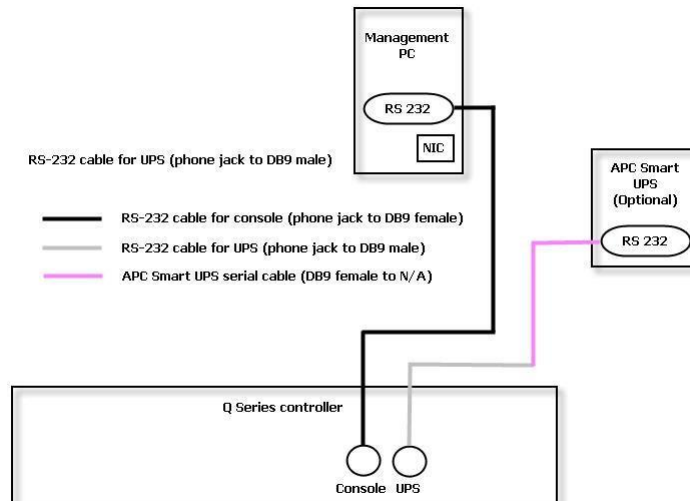

- Using RS-232 cable for console (back color, phone jack to DB9 female) to connect from controller to management PC directly.
- Using RS-232 cable for UPS (gray color, phone jack to DB9 male) to connect from controller to APC Smart UPS serial cable (DB9 female side), and then connect the serial cable to APC Smart UPS.



CAUTION:

It may not work when connecting the RS-232 cable for UPS (gray color, phone jack to DB9 male) to APC Smart UPS directly.

- Attach the power cords and power on the system, and then power on the hosts and the iSNS server (optional for iSCSI environment).
- Start the configuration.

Power ON / OFF

Power on the System

The power button is located at the right front handle. To turn on the system, you may press power button once. After you turn the power ON, the system performs a booting process which takes a few minutes.



CAUTION:

Be aware that when Controller Health LED is in RED, please DO NOT plug out the controller from the system or turn off the power suddenly. This may cause unrecoverable damage, which will not be covered by warranty.

Power off the System

If it becomes necessary to power down the system, it is recommended using a normal, controlled shutdown form through either the LCM or Web UI to ensure all data is flushed from the cache first.

1. Shutdown using LCM:

At the LCM:

- Power off the system using a normal shutdown.
 - Press **ENT** button.
 - Press ▾ (down) twice to show **Reboot/Shutdown**, and press **ENT** button.
 - Press ▾ (down) once to show **Shutdown**, and press **ENT** button.
 - Press ▴ (up) once to highlight **Yes**, and press **ENT** button.
- System shutdown begins. When shutdown process completes, the power LED will turn off.

2. Shutdown using Web UI:

Using the Web UI:

- Select **System Maintenance -> Reboot and Shutdown**.
- Click the **Shutdown** icon.
- System shutdown begins. When shutdown process completes, the power LED will turn off.

3. Shutdown using Power button:

The power button is located at the right front handle.

- Forced shutdown: press and hold for more than 4 seconds. The power will be cut off immediately.
- Graceful shutdown: press one to initialize graceful shutdown. Press 2nd time within 4 seconds to confirm and start graceful shutdown. If there is no 2nd press within 4 seconds, disable graceful shutdown and return to normal operating mode.

4. Shutdown using JetCentral

Client: Login JetCentral Client:

- Select **Maintenance -> Reboot and Shutdown**.
- Click the **Shutdown** icon.
- System shutdown begins. When shutdown process completes, the power LED will turn off.

Quick Setup

Management Interfaces

There are several management methods to manage the storage system, described on the following.

Serial Console

Use console cable (NULL modem cable) to connect from console port of the storage system to RS 232 port of the management PC. The console settings are on the following:

- Baud rate: 115200, 8 data bit, no parity, 1 stop bit, and no flow control.
- Terminal Type: vt100

The initial defaults for administrator login are:

- Management IP Address: 192.168.1.234
- User Name: admin
- Password: 00000000

Secure Shell Remote Access

SSH (secure shell) software is required for remote login. The SSH client software is available at the following web site:

- SSH Tectia Client: <http://www.ssh.com/>
- PuTTY: <http://www.chiark.greenend.org.uk/>

The default management IP address is 192.168.1.234/255.255.255.0, please configure your computer IP address at the same subnet of the system (e.g.: 192.168.1.1/255.255.255.0). The remote control settings are on the following:

- **Host IP: <IP Address> (e.g.: 192.168.1.234)**
- **User Name: admin**
- **Password: 00000000**



TIP: JetStor system supports SSH for remote access only. When using SSH, the IP address and password are required for login.

LCM

After booting up the system, the following screen shows management port IP and model name.

Example:

```
192.168.1.234
JetStor 724iF V2 ←
```

To access the LCM options, use the **ENT** (Enter) button, **ESC** (Escape) button, **↑** (up) and **↓** (down) to scroll through the functions.

This table describes the function of each item.

| Function | Description |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Info. | Display system information including firmware version and amount of RAM. |
| Alarm Mute | Mutes an alarm after an error occurs. |
| Reset/Shutdown | Reset or shutdown the system. |
| Quick Install | Provide quick steps to create a volume. |
| Volume Wizard | Provide smart steps to create a volume. |
| View IP Setting | Display current IP address, subnet mask, and gateway. |
| Change IP config | Set IP address, subnet mask, and gateway. There are 2 options: DHCP (Get IP address from DHCP server) or static IP. |
| Enc. Management | Shows the enclosure data for physical disk temperatures, fan status, and power supply status. |
| Reset to Default | Reset the system to default settings. The default resets include: <ul style="list-style-type: none"> • Management IP Address: 192.168.1.234 • User Name: admin • Password: 00000000 |

WARNING or ERROR events displayed on the LCM are automatically filtered by the LCM default filter. The filter setting can be changed in the Web UI under **System Configuration -> Log and Alert Settings**.

This table displays the LCM menu hierarchy.

| Main | L1 | L2 | L3 | L4 | L5 |
|---------------------------------------|------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------|----------------------|------------------------------|
| | | Firmware Version | | | |
| | System Info. | <n.n.n> | | | |
| | | RAM Size <nnnn> MB | | | |
| | Alarm Mute | *Yes No* | | | |
| | Reset/Shutdown | Reset | *Yes No* | | |
| | | Shutdown | *Yes No* | | |
| | Quick Install (only available if not already set) | <RAID 0 RAID 1 RAID 3 RAID 5 RAID 6 RAID 0+1> nnn GB | Apply The Config | *Yes No* | |
| | Volume Wizard (only available if not already set) | Local <RAID 0 RAID 1 RAID 3 RAID 5 RAID 6 RAID 0+1> | Use default algorithm | Volume Size <nnn> GB | Apply The Config *Yes No* |
| | | JBOD <n> ** <RAID 0 RAID 1 RAID 3 RAID 5 RAID 6 RAID 0+1> | New n disk ** <nnn> GB | Adjust Volume Size | Apply The Config *Yes No* |
| <IP Addr> JetStor <Model> .. | | | | | |
| | View IP Setting | IP Config <Static IP / DHCP / BOOTP> | | | |
| | | IP Address <192.168.001.234> | | | |
| | | IP Subnet Mask <255.255.255.0> | | | |
| | | IP Gateway <xxx.xxx.xxx.xxx> | | | |
| | | DHCP | *Yes No* | | |
| | | BOOTP | *Yes No* | | |
| | Change IP Config | | IP Address | Adjust IP address | |
| | | Static IP | IP Subnet Mask | Adjust Submask IP | |
| | | | IP Gateway | Adjust Gateway IP | |
| | | | Apply IP Setting | *Yes No* | |
| | Enc. Management | Phy. Disk Temp. | Local Slot <n>: <nn> (C) | | |
| | | Cooling | Local FAN<n>: <nnnn> RPM | | |
| | | Power Supply | Local PSU<n>: <status> | | |
| | Reset to Default | *Yes No* | | | |

USB LCM is developed because of security concern and adding more mobility and flexibility. Several **JetStor** systems can share one USB LCM. It can further save your costs. All the functions provided by USB LCM are the same as the original

LCM introduced in previous section. Please be aware to remove the USB LCM before adding the front bezel.



CAUTION:


To prevent data loss, when powering down the storage system, it is recommended to execute **Reset/Shutdown -> Shutdown -> Yes** to flush the data from the cache to the physical disks.

Web UI

JetStor storage system supports graphic user interface operation. It supports most common web browsers. Be sure to connect the LAN cable to the management port of the system.

The default management IP address is 192.168.1.234/255.255.255.0, please configure your computer IP address at the same subnet of the system (e.g.: 192.168.1.1/255.255.255.0). And then enter the IP address into your browser to display the authentication screen.

- <http://<IP Address>> (e.g.: <http://192.168.1.234>)

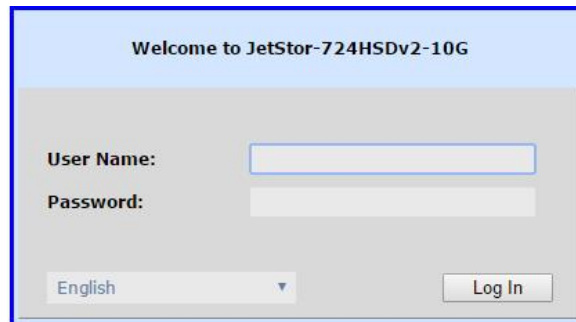

To access the Web UI, you have to enter a user name and password. The initial defaults for administrator login are:

- User Name: admin
- Password: 00000000

When the password has been verified, the home page is displayed.



Choose the functions from the Menu Bar on the left side of the window to make any configuration changes.



TIP:

The **Host Port Configuration** menu bar option is only visible when the controller has multiple interfaces. The **iSCSI Configuration** menu bar option is only visible when the controller has iSCSI ports.

There are up to seven indicators and three icons at the top-right corner. The last indicator (Dual controller) is only visible when two controllers are installed.



This table describes the indicators and icons.

| Icon | Description |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | RAID indicator: <ul style="list-style-type: none"> Green: All RAID groups are functioning. Red: A RAID group is degraded or has failed. |
| | Temperature indicator: <ul style="list-style-type: none"> Green: Temperature is normal. Red: Temperature is too high. |
| | Voltage indicator: <ul style="list-style-type: none"> Green: Voltage values are normal. Red: Voltage values are out of range. |
| | UPS indicator: <ul style="list-style-type: none"> Green: UPS is functioning or no UPS is connected. Red: UPS connection has failed. |
| | Fan indicator: <ul style="list-style-type: none"> Green: Fan is working well. Red: Fan failed. |
| | Power indicator: <ul style="list-style-type: none"> Green: Power supplies are connected and working well. Red: A power supply has failed or is no longer connected. |
| | Dual controller indicator: <ul style="list-style-type: none"> Green: Dual controllers are active and working well. Orange: One of the dual controllers has failed. |
| | Return to home page. |
| | Logout of the management web UI. |
| | Mute alarm beeper. |



TIP:

If the status indicators in Internet Explorer (IE) are displayed in gray, but not in blinking red, please enable **Tools -> Internet Options -> Advanced -> Play animations in webpages** options in IE. The default value is enabled, but some applications disable it.

How to Use the Guided Configurations

To help users get started quickly, two guided configuration tools are available in the Web UI and LCM. **Quick Installation** guides you an easy way to create a volume. **Volume Creation Wizard** provides a smarter policy to help users to create a volume. If you are an advanced user, you can skip these steps.

Quick Installation Tool

This tool guides you through the process of setting up basic array information, configuring network settings, and the creation of a volume on the storage system. Please make sure that it has some free hard drives installed in the system. SAS drivers are recommended.

| Physical Disks | | | | | | | | | | | | | |
|--------------------------------------------|-----------|------------|----------|--------|--------|-------|--------|-----------------|--------------|-------------|----------|------------|-----------------|
| RAID Groups | | | | | | | | | | | | | |
| Virtual Disks | | | | | | | | | | | | | |
| Snapshots | | | | | | | | | | | | | |
| Logical Units | | | | | | | | | | | | | |
| QReplicas | | | | | | | | | | | | | |
| Show disk for: Local Show disk size in: GB | | | | | | | | | | | | | |
| Slot | Size (GB) | RAID Group | RAID Set | Status | Health | Usage | Vendor | Serial Number | Rate | Write Cache | Standby | Read-Ahead | Command Queuing |
| 1 | 1862 | | N/A | Online | Good | Free | WDC | WD-WCAVY4158095 | SATA 6.0Gb/s | Disabled | Disabled | Enabled | Enabled |
| 2 | 1862 | | N/A | Online | Good | Free | WDC | WD-WCAVY3924333 | SATA 6.0Gb/s | Disabled | Disabled | Enabled | Enabled |
| 3 | 1862 | | N/A | Online | Good | Free | WDC | WD-WCAVY4118479 | SATA 6.0Gb/s | Disabled | Disabled | Enabled | Enabled |

1. Click **Quick Installation** from the menu bar.
2. Enter a **System Name** and set up the **Date and Time**. Click **Next** button to proceed.

Quick Installation

Step 1: System Settings

System Name

System Name:

Date and Time

Change Date and Time

Current Time:

Time Zone:

Setup Date and Time Manually

Date: / /

Time: : :

NTP

Server:

3. Confirm or change the management port IP address and DNS server. If the default HTTP, HTTPS, and SSH port numbers are not allowed on your network, they can be changed here as well.

Quick Installation

Step 2: Network Settings

MAC Address

MAC Address: 00:13:78:BB:38:80

Address

Use DHCP
 Use BOOTP
 Specify a Static IP Address

IP Address: 192.168.1.234

Subnet Mask: 255.255.0.0

Gateway:

DNS Server Address

Address:

Service Ports

HTTP Port: 80

HTTPS Port: 443

SSH Port: 22

<< Back
Next >>
Cancel

4. For iSCSI Configurations, use this step to set up the data port iSCSI IP address, and then click **Next** button.

Quick Installation

Step 3: iSCSI IP Address Settings

LAN1:

Use DHCP


Specify a Static IP Address

Address:

Mask:

Gateway:

5. Choose a **RAID Level**. The number in the brackets is the maximum capacity at the RAID level. This step utilizes all drives in the storage system as well as any JBOD expansion arrays present. This option allows the selection of the RAID type and the number of drives in each array.

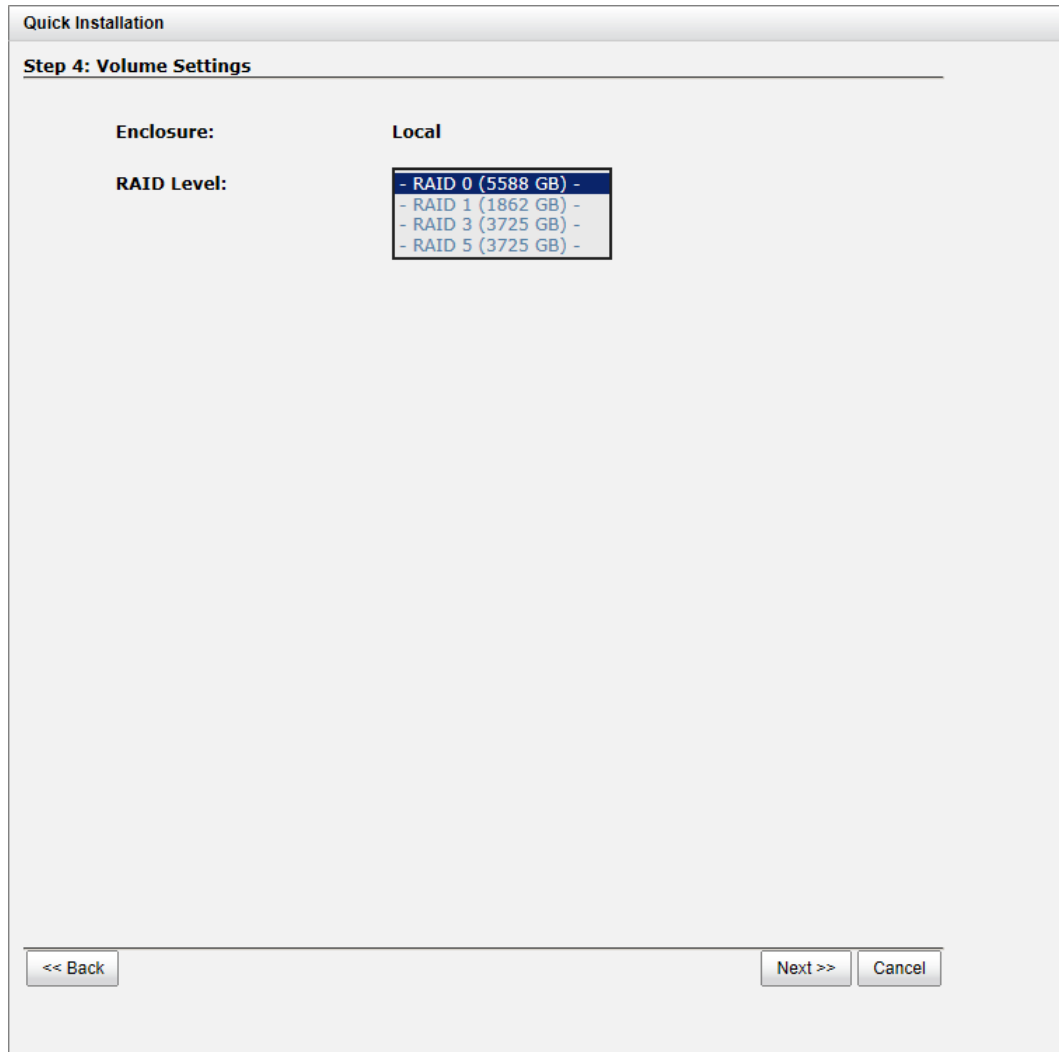

6. Verify all items, and then click **Finish** button to complete the quick installation.

Quick Installation

Confirm

General

System Name: JetStor-724HSDv2-10G

Date and Time

Time zone: (GMT+08:00) Taipei

Date: 2014/1/17

Time: 10:39:50

Network Settings

Address: Using-DHCP

HTTP Port: 80

HTTPS Port: 443

SSH Port: 22

DNS Server Address:

iSCSI IP Address Settings

Address: 10.0.0.1

Mask: 255.255.255.0

Gateway: 10.0.0.254

Volume Settings

RAID Level: RAID 0 on Local enclosure

RAID Size: 5588

The iSCSI information is only displayed when iSCSI controllers are used. Use **Back** button to return to a previous page to change any setting.

Volume Creation Wizard


The **Volume Creation Wizard** provides a smarter policy to determine all possibilities and volume sizes in the different RAID levels that can be created using the existing free drives. It provides:

- Largest capacity for each RAID level from which to choose.
- The fewest number of drives for each RAID level / volume size.


This way, after choosing RAID level, you may find that some drives are still available (free status). This phenomenon is the result of using smart design. Take an example, user chooses the RAID 5 level and the system has 12*200GB + 4*80GB free drives inserted. Generally, if using all 16 drives for a RAID 5 group, the maximum size of volume is (16-1)*80GB = 1200GB. This wizard provides a

smarter check and searches the most efficient way of using free drives. It uses 200GB drives only to provide $(12-1)*200\text{GB} = 2200\text{GB}$ capacity, the volume size is larger and less drives.


1. Click **Volume Creation Wizard** from the menu bar.
2. Choose a **RAID Level**. The number in the brackets is the maximum capacity at the RAID level.

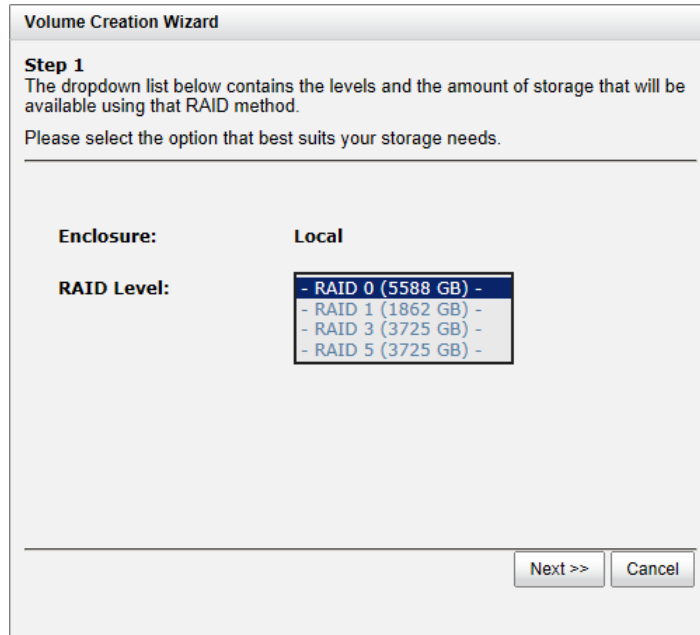


3. Select the default option **Maximize the size of the RAID group** or manual option **Select the number of disks to use**. From the drop-down list, select either the RAID Group capacity combination desired. Click **Next** button to proceed.

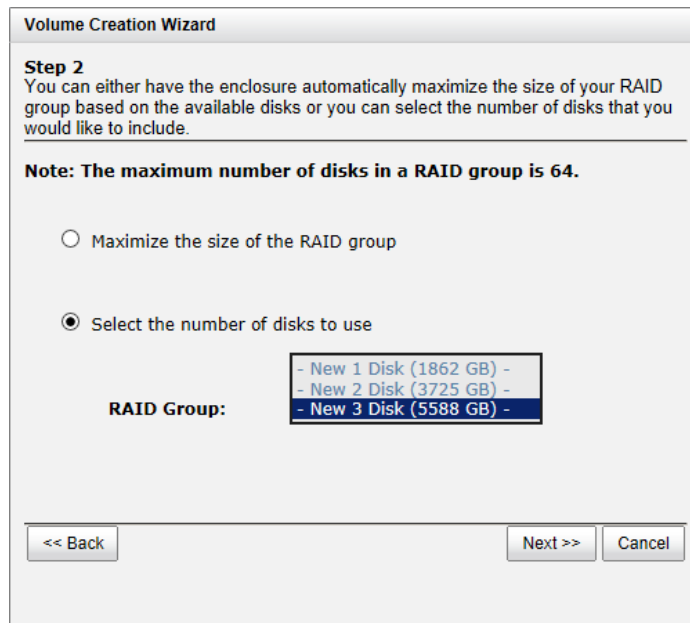

4. Enter the **Volume Size (GB)** desired that is less than or equal to the default available size shown. Then click **Next** button.

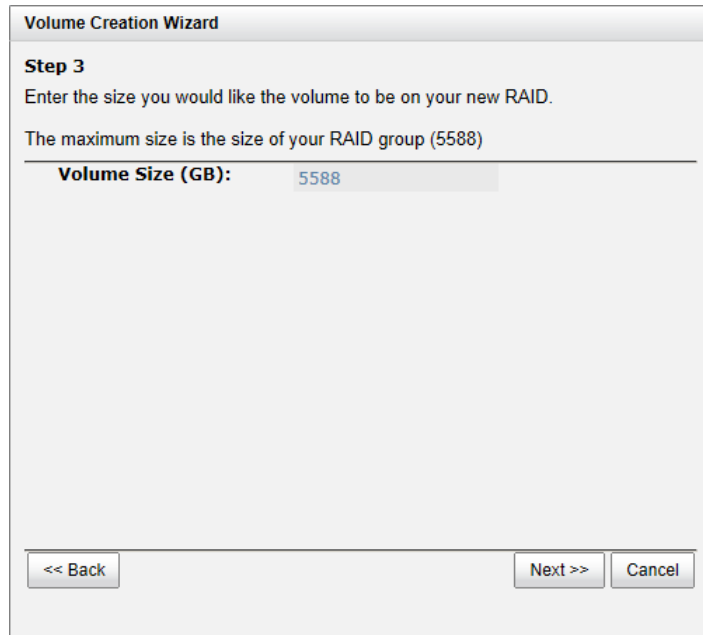

5. Use LBA 64 support? It depends on the operation system.

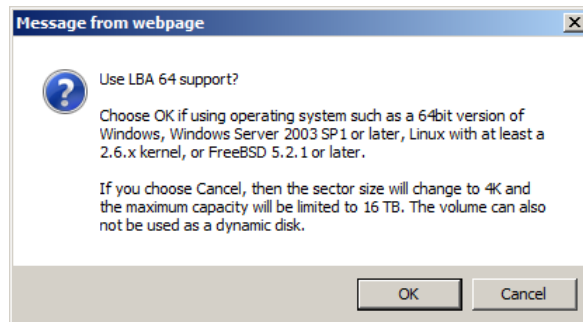

6. Finally, verify the selections and click **Finish** button if they are correct.

Volume Creation Wizard

Confirm
Please confirm the settings for your new volume below and click 'Finish'.

| | |
|--------------------------|------------|
| RAID Level: | RAID 0 |
| RAID Group Name: | QUICK12169 |
| Volume Size (GB): | 5588 |

<< Back Finish Cancel

The volume is created and named by the system automatically. It is available to use now.

4

Basic Configuration

Interface Hierarchy

This table describes the hierarchy of the web GUI.

| Menu Bar | L1 | L2, Button or Menu |
|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Configuration | System Settings | System Name / Date and Time / System Indication |
| | Network Settings | MAC Address / IP Address / DNS Server Address / Service Ports |
| | Login Settings | Login Options / Admin Password / User Password |
| | Email Notification Settings | Email Settings / Send Test Mail |
| | Log and Alert Settings | SNMP Trap Settings / Windows Messenger / Syslog Server Settings / Admin Interface and Front Display Alerts / Device Buzzer |
| iSCSI Configuration <i>(This option is only visible when the controller has iSCSI ports.)</i> | Network Setup | Show information for: < Controller 1 Controller 2 > Options: [iSCSI Bonding Settings] / Delete iSCSI Bonding / Set VLAN ID / iSCSI IP Address Settings / Make Default Gateway / [Enable Disable] Jumbo Frames / Ping Host / Reset Port |
| | Entity and iSNS Settings | Entity Name / iSNS IP Address |
| Host Configuration <i>(This option is only visible when the controller has multiple interfaces.)</i> | iSCSI Node | Show information for: < Controller 1 Controller 2 > Options: Authentication Method / Change Portal / Rename Alias / Users |
| | Active Sessions | Show information for: < Controller 1 Controller 2 > Connection Details / Disconnect |
| | CHAP Accounts | Create User Options: Modify User Information / Delete User |
| | Fibre Channel <i>(This option is only visible when the controller has FC ports.)</i> | Show information for: < Controller 1 Controller 2 > Clear All Counters Options: Change Link speed / Change Connection Mode / Node Configuration / Clear Counters |
| Volume Configuration | Physical Disks | Show disk for: < Local JBODn > Show disk size in: < GB MB > Disk Health Check / Disk Check Report Options: Set Free Disk / Set Global Spare / Set Local Spare / Set Dedicated Spare / Upgrade / Disk Scrub / Read Error Cleared / Turn [on off] the Indication LED / More information |
| | RAID Groups | Show RAID size in: < GB MB > Create Options: Migrate RAID Level / Move RAID Level / [Activate Deactivate] / Verify Parity / Delete / Change Preferred Controller / Change RAID Options / Add RAID Set / Add Policy / More information RAID Set options: Remove / Move RAID Level / List Disks RAID Group Policy options: Delete / Modify |
| | Virtual Disks | Create / Cloning Options Options: Extend / Set SSD Caching / Verify Parity / Delete / Set Properties / Space Reclamation / Attach LUN / Detach LUNs / List LUNs / Set Clone / Set Snapshot Space / Cleanup Snapshots / Take a Snapshot / Scheduled Snapshots / List Snapshots / More information |
| | Snapshots | Set Snapshot Space / Scheduled Snapshots / Take a Snapshot / Cleanup Snapshots |

| | | |
|------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | Options: Set Quota / Rollback / Delete |
| | Logical Units | Attach LUN Options: Detach LUN |
| | QReplicas | Create / Rebuild / QReplica Options / Shaping Setting Configuration Options: Start / Stop / Set Task Shaping / Add Path / Delete Path / Schedule / Delete / Add Connection / Delete Connection Task Path options: Add Connection / Delete Connection / Delete |
| Enclosure Management | Hardware Monitor | Show information for: < -Local- -JBODn- > Temperature (Internal)/(Case): < (C) / (F) > Controller 1 Monitors / Controller 2 Monitors / Backplane Options: Auto Shutdown |
| | UPS | UPS Type / Shutdown Battery Level (%) / Shutdown Delay (Seconds) / Shutdown UPS / UPS Status / UPS Battery Level |
| | SES | [Enable Disable] |
| | S.M.A.R.T. | Show information for: < -Local- -JBODn- > Temperature (Internal)/(Case): < (C) (F) > |
| | System Maintenance | System information |
| | Event log | Event Log Level to Show: < Information Warning Error > Download / Mute Buzzer / Clear |
| | Upgrade | Controller Module Firmware Update / JBOD Firmware Update / Controller Mode / SSD Caching License |
| | Firmware Synchronization <i>(This option is only visible when dual controllers are inserted.)</i> | Apply |
| | Reset to Factory Default | Reset |
| | Configuration Backup | Import or Export / Import File |
| | Volume Restoration | Options: Restore |
| | Reboot and Shutdown | Reboot / Shutdown Reboot options: [Both Controller 1 and Controller 2 Controller 1 Controller 2] |
| Performance Monitor | Disk | Show disk for: < -Local- -JBODn- > |
| | iSCSI | Controller 1 / Controller 2 |
| | Fibre Channel <i>(This option is only visible when the controller has FC ports.)</i> | Controller 1 / Controller 2 |
| Quick Installation | | Step 1 / Step 2 / Step 3 / Step 4 / Confirm |
| Volume Creation Wizard | | Step 1 / Step 2 / Step 3 / Confirm |

System Configuration

The **System Configuration** menu option is for accessing the **System Settings**, **Network Settings**, **Login Settings**, **Email Notification Settings**, and **Log and Alert Settings** option tabs.



System Settings

The **System Settings** tab is used to setup the system name and date. The default system name is composed of the model name and the serial number of this system.

Change General System Settings

On this screen you can change the name of the device, set the current date and time manually or automatically using an NTP (Network Time Protocol) server, and identify the device by flashing an indicator.

System Name

System Name:

Date and Time

Change Date and Time

Current Time:

Time Zone:

Setup Date and Time Manually

Date: / /

Time: : :

NTP

Server:

System Identification

Flash the status light on the front display.

The options are available on this tab:

- **System Name:** Change the **System Name**, highlight the old name and type in a new one.
- **Date and Time:** Change the current date, time and time zone settings, check **Change Date and Time**. The changes can be done manually or synchronized from an NTP (Network Time Protocol) server.
- **System Identification:** **Flash the status light on the front display** for locating this system in the racks, click **OK** button. To **Stop flashing the status light on the front display**, click **OK** button again.

When it is done, click **Apply** button.

Network Settings

The **Network Settings** tab is used to view the MAC address and change basic network settings.

Change Network Settings
 On this screen change the network settings for the administration port.

Enable dual management ports

MAC Address

MAC Address: 00:13:78:BB:38:80

IP Address

Use DHCP
 Use BOOTP
 Specify a Static IP Address

IP Address:
Subnet Mask:
Gateway:

DNS Server Address

Address:

Service Ports

HTTP Port:
HTTPS Port:
SSH Port:

The options are available on this tab:

- **Enable dual management ports:** This is for dual controller models. Check it to enable dual management ports.
- **MAC Address:** Display the MAC address of the management port in the system.
- **IP Address:** The option can change IP address for remote administration usage. There are three options: **DHCP**, **BOOTP** and **Specify a Static IP Address**. **DNS Server Address:** If necessary, the IP address of DNS server can be entered or changed here.
- **Service Ports:** If the default port numbers of HTTP, HTTPS and SSH are not allowed on the network, they can be changed here.

When it is done, click **Apply** button.

Login Settings

The **Login Settings** tab is used to control access to the storage system. For the security reason, set the auto logout option or set the limit access of one administrator at a time. The other options can change the Admin and User passwords.

Change Login Options and Passwords
 When the auto logout option is enabled, you will be logged out of the admin interface after the time specified. The login lock option prevents multiple people from administering the storage server at the same time.

Login Options

Auto Logout: - Disable - ▾

Login Lock: - Disable -
- Enable -

Admin Password

Change Admin Password

Current Password:

New Password:

Re-type New Password:

User Password

Change User Password

New Password:

Re-type New Password:

The options are available on this tab:

- **Auto Logout:** When the auto logout option is enabled, you will be logged out of the admin interface after the time specified. There are Disable (default), 5 minutes, 30 minutes and 1 hour options.
- **Login Lock:** When the login lock is enabled, the system allows only one user to login to the web UI at a time. There are Disable (default) and Enable options.
- **Change Admin Password:** Check it to change administrator password. The maximum length of password is 12 alphanumeric characters.
- **Change User Password:** Check it to change user password. The maximum length of password is 12 alphanumeric characters.

When it is done, click **Apply** button.

Email Notification Settings

The **Email Notification Settings** tab is used to enter up to three email addresses for receiving the event notifications. Fill in the necessary fields and click **Send Test Email** button to test whether it is available. Some email servers will check the mail-from address and need the SMTP relay settings for authentication.



TIP: Please make sure the DNS server IP is well-setup in **System Configuration -> Network Settings**. So the event notification emails can be sent successfully.

You can also select which levels of event logs which you would like to receive. The default setting only includes **Warning** and **Error** event logs.

Configure Email Notification Settings
 You can specify up to three email addresses for email notifications. You should use the SMTP server option to specify a specific email server that you would like to use for sending email notifications (required if your network will not allow this device to send the email directly).
 After the information is set, you can click 'Send test mail' to test whether email functions are available.

| Email Settings | |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| From Email Address: | <input type="text" value="mailman@JetStor-724HSDv2"/> |
| To Email Address #1: | <input type="text"/> |
| Alert Levels To Send1: | <input type="checkbox"/> Information <input checked="" type="checkbox"/> Warning <input checked="" type="checkbox"/> Error |
| To Email Address #2: | <input type="text"/> |
| Alert Levels To Send2: | <input type="checkbox"/> Information <input checked="" type="checkbox"/> Warning <input checked="" type="checkbox"/> Error |
| To Email Address #3: | <input type="text"/> |
| Alert Levels To Send3: | <input type="checkbox"/> Information <input checked="" type="checkbox"/> Warning <input checked="" type="checkbox"/> Error |
| <input type="checkbox"/> Specify a SMTP Server | |
| SMTP Server Address: | <input type="text"/> |
| Use Authentication: | <input type="text" value="Disable"/> |
| User Name: | <input type="text"/> |
| Password: | <input type="text"/> |
| Re-type Password: | <input type="text"/> |

When it is done, click **Apply** button.

Log and Alert Settings

The **Log and Alert Settings** tab is used to setup SNMP traps (for alerting via SNMP), pop-up messages via Windows messenger (not MSN or Skype), alerts via the syslog protocol, the pop-up alerts and alerts on the front display. The device buzzer is also managed here.

| | |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| SNMP Trap Settings ▾ | |
| Host Address #1: | <input type="text"/> |
| Host Address #2: | <input type="text"/> |
| Host Address #3: | <input type="text"/> |
| Community: | public <input type="text"/> |
| SNMP MIB File Download: | <input type="button" value="Download"/> |
| Alert Levels To Send: | <input checked="" type="checkbox"/> Information <input checked="" type="checkbox"/> Warning <input checked="" type="checkbox"/> Error |
| Windows Messenger ▾ | |
| Host Address #1: | <input type="text"/> |
| Host Address #2: | <input type="text"/> |
| Host Address #3: | <input type="text"/> |
| Alert Levels To Send: | <input type="checkbox"/> Information <input checked="" type="checkbox"/> Warning <input checked="" type="checkbox"/> Error |
| Syslog Server Settings ▾ | |
| Host Address or Name: | <input type="text"/> |
| UDP Port: | 514 <input type="text"/> |
| Facility: | User <input type="text"/> ▾ |
| Alert Levels To Log: | <input type="checkbox"/> Information <input checked="" type="checkbox"/> Warning <input checked="" type="checkbox"/> Error |
| Admin Interface and Front Display Alerts ▾ | |
| Admin Interface Popup Alerts: | <input type="checkbox"/> Information <input type="checkbox"/> Warning <input type="checkbox"/> Error |
| Alerts to Show on Front Display: | <input type="checkbox"/> Information <input checked="" type="checkbox"/> Warning <input checked="" type="checkbox"/> Error |
| Device Buzzer ▾ | |
| Disable the Device Buzzer: | <input type="checkbox"/> |
| <input type="button" value="Apply"/> | |

The options are available on this tab:

- **SNMP Trap Settings:** It allows up to three SNMP trap addresses. The default community setting is public. You can check the alert levels which you would like to receive. The default setting only includes **Warning** and **Error** event logs. If necessary, click **Download** to get the MIB file for importing to the SNMP client tool.

There are many SNMP tools available on the internet.

- SNMPc: <http://www.snmpc.com/>
- Net-SNMP: <http://net-snmp.sourceforge.net/>

- **Windows Messenger:** You must enable the Messenger service in Windows (**Start -> Control Panel -> Administrative Tools -> Services -> Messenger**). It allows up to three host addresses. The same, you can check the alert levels which you would like to receive.
- **System Server Settings:** Fill in the host address and the facility for syslog service. The default UDP port is 514. You can also check the alert levels here.

There are some syslog server tools available on the internet for Windows.

- WinSyslog: <http://www.winsyslog.com/>
- Kiwi Syslog Daemon: <http://www.kiwisyslog.com/>

Most UNIX systems built in syslog daemon.

- **Admin Interface and Front Display Alerts:** You can check the alert levels which you would like to have pop-up message in the Web UI and show on front display. The default setting for admin interface is none while the default setting for shown on the front display includes **Warning** and **Error** event logs.
- **Device Buzzer:** Check it to disable the device buzzer. Uncheck it to activate the device buzzer. When it is done, click **Apply** button.

Host Port / iSCSI Configuration

The **Host port / iSCSI Configuration** menu option is for accessing the **Network Setup, Entity and iSNS Settings, iSCSI Nodes, Active Sessions, CHAP Account** and **Fibre Channel** (This option is only visible when the controller has Fibre Channel ports) option tabs.



Network Setup

The **Network Setup** tab is used to change IP addresses of iSCSI data ports. The various controllers have different iSCSI ports, list on the following:

- **724HS(D) 10G V2:** 2 x 10GbE iSCSI ports + 2 x GbE iSCSI ports per controller.
- **724iF(D) V2:** 2 x GbE iSCSI ports per controller.

These network ports must be assigned IP addresses then they can be used. For better performance or fault tolerance reason, they can be bonding as Trunking or LACP. These bonding network ports share a single IP address. The following example shows (6 x GbE iSCSI ports).

Show information for: Controller 1

| | Name | LAG | LAG No | VLAN ID | Use DHCP | IP Address | Netmask | Gateway | Jumbo Frames | MAC Address | Link |
|---|------|-----|--------|---------|----------|------------|---------------|------------|--------------|-------------------|--------|
| ▼ | LAN1 | No | N/A | N/A | No | 10.0.0.1 | 255.255.255.0 | 10.0.0.254 | Disabled | 00:13:78:bb:38:82 | 1 Gbps |
| ▼ | LAN2 | No | N/A | N/A | No | 10.0.0.2 | 255.255.255.0 | 10.0.0.254 | Disabled | 00:13:78:bb:38:83 | Down |
| ▼ | LAN3 | No | N/A | N/A | No | 10.0.0.3 | 255.255.255.0 | 10.0.0.254 | Disabled | 00:13:78:bb:38:84 | Down |
| ▼ | LAN4 | No | N/A | N/A | No | 10.0.0.4 | 255.255.255.0 | 10.0.0.254 | Disabled | 00:13:78:bb:38:85 | Down |
| ▼ | LAN5 | No | N/A | N/A | No | 10.0.0.5 | 255.255.255.0 | 10.0.0.254 | Disabled | 00:13:78:bb:38:86 | Down |
| ▼ | LAN6 | No | N/A | N/A | No | 10.0.0.6 | 255.255.255.0 | 10.0.0.254 | Disabled | 00:13:78:bb:38:87 | Down |


iSCSI Bonding Settings

- Set VLAN ID
- iSCSI IP Address Settings
- Make Default Gateway
- Enable Jumbo Frames
- Ping Host
- Reset Port

This figure shows six iSCSI data ports. These data ports are set up with a static IP address. For the other controllers, that can be set up the same way.

The options are available on this tab:

- ▼ -> **iSCSI Bonding Settings:** The default mode of each iSCSI data port is individually connected without any bonding. Trunking and LACP (Link Aggregation Control Protocol) settings can be setup here. At least two iSCSI data ports must be checked for iSCSI bonding.

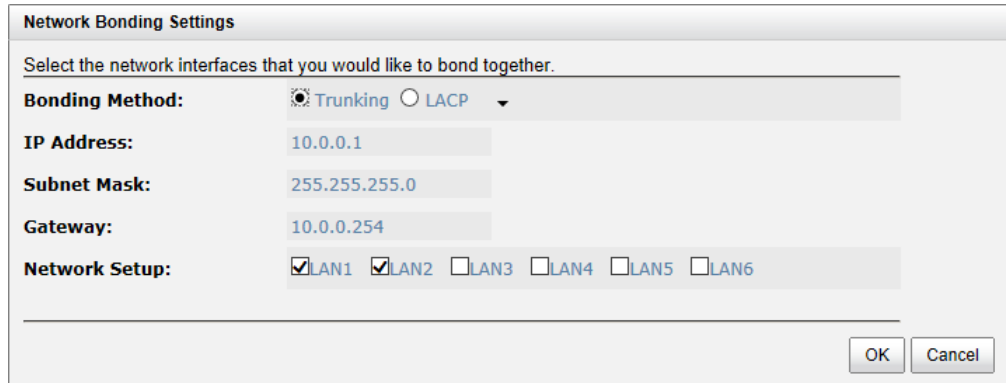

Network Bonding Settings

Select the network interfaces that you would like to bond together.

Bonding Method: Trunking LACP

IP Address: 10.0.0.1


Subnet Mask: 255.255.255.0

Gateway: 10.0.0.254

Network Setup: LAN1 LAN2 LAN3 LAN4 LAN5 LAN6

OK Cancel

- **Trunking:** Configures multiple iSCSI ports to be grouped together into one in order to increase the connection speed beyond the limit of a single iSCSI port.
- **LACP:** The Link Aggregation Control Protocol is part of IEEE specification 802.3ad that allows bonding several physical ports together to form a single logical channel. LACP allows a network switch to negotiate an automatic bundle by sending LACP packets to the peer. The advantages of LACP are that it increases bandwidth usage and it automatically performs a failover when the link status fails on a port.
- ▼ -> **Set VLAN ID:** VLAN is a logical grouping mechanism implemented on switch device. VLANs are collections of switching ports that comprise a single broadcast domain. It allows network traffic to flow more efficiently within these logical subgroups. Please consult your network switch user manual for VLAN setting instructions. Most of the work is done at the switch part. All you need to do is to make sure that your VLAN ID of iSCSI port matches that of switch port. If your network environment supports VLAN, you can use this function to change the configurations. Fill in VLAN ID and Priority settings to enable VLAN.

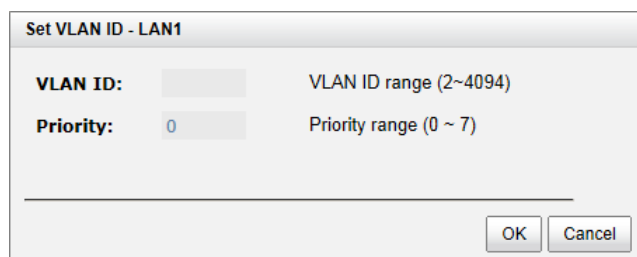

Set VLAN ID - LAN1

VLAN ID: VLAN ID range (2~4094)

Priority: 0 Priority range (0 ~ 7)

OK Cancel

- **VLAN ID:** VLAN ID is a 12-bit number. Its range is from 2 to 4094, while 0, 1, and 4095 are reserved for special purposes.
- **Priority:** The PCP (Priority Code Point) is a 3-bit number and reserved for QoS. The definition complies with IEEE 802.1p protocol, ranging from 0 to 7, with 0 as the


default value. In normal cases, you don't need to set this value. Using the default will do just fine.



TIP:

If iSCSI ports are assigned with VLAN ID before creating aggregation takes place, aggregation will remove VLAN ID. You need to repeat the steps to set VLAN ID for the aggregation group.

- ▼ -> **iSCSI IP Address Settings:** It can assign an iSCSI IP address of the iSCSI data port. There are two options: **Use DHCP** to acquire an IP address automatically or **Specify a Static IP Address** to set the IP address manually.

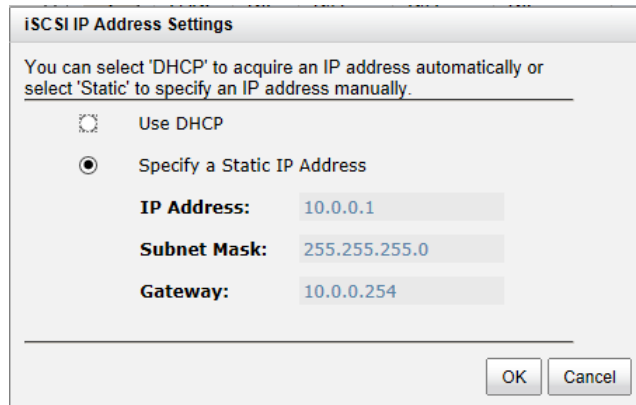


- ▼ -> **Make Default Gateway:** Set the gateway of the IP address as default gateway. There can be only one default gateway. To remove the default gateway, click ▼ -> **Remove Default Gateway.**
- ▼ -> **Enable jumbo frames:** It can enable the MTU (Maximum Transmission Unit) size. The maximum jumbo frame size is **3900** bytes. To disable jumbo frames, click ▼ -> **Disable Jumbo Frames.**



CAUTION:

VLAN ID, jumbo frames for both the switching hub and HBA on host must be enabled. Otherwise, the LAN connection cannot work properly.


- ▼ -> **Ping host:** It can verify the port connection from a target to the corresponding host data port. Input the host's IP address and click **Start** button. The system will display the ping result. Or click **Stop** button to stop the test.

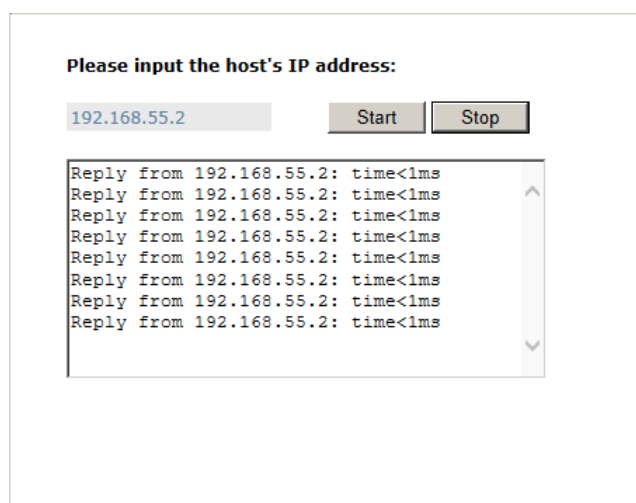

- ▼-> **Reset Port:** If the behavior of the port is abnormal, try to reset port to make it normal.

Entity and iSNS Settings

The **Entity and iSNS Settings** tab is used to view the entity name of the system, and setup iSNS IP for the iSNS (Internet Storage Name Service) protocol. It allows automated discovery, management and configuration of iSCSI devices on a TCP/IP network. To use iSNS, an iSNS server needs to be added to the SAN. When this is done, the iSNS server IP address must be added to the storage system for iSCSI initiator service to send queries to it.

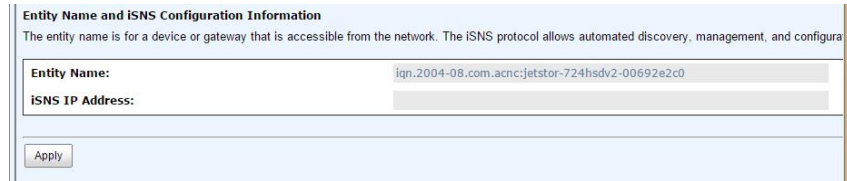

Entity Name and iSNS Configuration Information
 The entity name is for a device or gateway that is accessible from the network. The iSNS protocol allows automated discovery, management, and configura

Entity Name:

iSNS IP Address:

To make changes, enter the **Entity Name** and the **iSNS IP Address**, and then click **Apply** button.

iSCSI Nodes

The **iSCSI Nodes** tab is used to view the target name for iSCSI initiator. The various controllers support different number of multiple nodes, list on the following:

- **724HS(D) 10G V2:** Up to 64 multiple nodes per controller.
- **724iF(D) V2:** Up to 32 multiple nodes per controller.

The following example shows (up to 128 multiple nodes).

Show information for: Controller 1

<< first < prev 1 2 3 4 5 6 7 8 9 10 next > last >>

| ID | Auth | Node Name | Portal | Alias |
|----|------|------------------------------------------------------------|------------------------------------------------------------------------|-------|
| 0 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev0.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 1 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev1.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 2 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev2.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 3 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev3.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 4 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev4.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 5 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev5.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 6 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev6.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 7 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev7.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 8 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev8.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 9 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev9.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 10 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev10.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| 11 | None | iqn.2004-08.com.acnc:jetstor-724hsdv2-00692e2c0:dev11.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |

<< first < prev 1 2 3 4 5 6 7 8 9 10 next > last >>

The options are available on this tab:

- ▼ -> **Authentication Method:** CHAP (Challenge Handshake Authentication Protocol) is a strong authentication method used in point-to-point for user login. It's a type of authentication in which the authentication server sends the client a key to be used for encrypting the username and password. CHAP enables the username and password to transmit in an encrypted form for protection.



TIP:

A CHAP account must be added before you can use this authentication method. Please refer to **CHAP Accounts** session to create an account if none exists.

To use CHAP authentication, please follow the procedures.

- Select one of nodes from one controller.
- Click ▼ -> **Authentication Method**.
- Select **CHAP** from the drop-down list.

Authentication Method

Choose Authentication Method
Select the authentication method that you would like to use for this node.

Authentication Method: None
CHAP

- Click **OK** button.

| ID | Auth | Node Name | Portal | Alias |
|-----|------|-----------------------------------------------------------|------------------------------------------------------------------------|-------|
| ▼ 0 | CHAP | iqn.2004-08.com.acnc.jetstor-724hsdv2-00692e2c0:dev0.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| ▼ 1 | CHAP | iqn.2004-08.com.acnc.jetstor-724hsdv2-00692e2c0:dev1.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| ▼ 2 | None | iqn.2004-08.com.acnc.jetstor-724hsdv2-00692e2c0:dev2.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| ▼ 3 | None | iqn.2004-08.com.acnc.jetstor-724hsdv2-00692e2c0:dev3.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| ▼ 4 | None | iqn.2004-08.com.acnc.jetstor-724hsdv2-00692e2c0:dev4.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |

- Click ▼ -> **User**.
- Select CHAP user(s) which will be used. It can be more than one, but it must be at least one CHAP to enable on the node.

CHAP User Selection

Select the CHAP user(s) that you would like to have access to this node. If you do not select a user then CHAP protection will not be enabled on this node.

Setting for Node: **iqn.2004-08.com.acnc.jetstor-724hsdv2-00692e2c0:dev0.ctr1**

| Enable | Users |
|-------------------------------------|-------|
| <input checked="" type="checkbox"/> | chap1 |
| <input type="checkbox"/> | chap2 |

- Click **OK** button.
- To disable CHAP authentication, please follow the procedures.
- Select the node which wants to disable CHAP.
 - Click ▼ -> **Authentication Method**.
 - Change it to **None** from the drop-down list.
 - Click **OK** button.
- ▼-> **Change Portal:** Use this iSCSI node option to change the network ports available.
 - Select one of nodes from one controller.
 - Click ▼ -> **Change Portal**.
 - Select the network ports that you would like to be available for this iSCSI node.

Change Network Portal

Assign or Change LAN Portal

Select the network ports that you would like to be available for this iSCSI node.

Available On:

- 10.0.0.1:3260 (LAN 1, Use DHCP: No, Jumbo Frames: Disabled)
- 10.0.0.2:3260 (LAN 2, Use DHCP: No, Jumbo Frames: Disabled)
- 10.0.0.3:3260 (LAN 3, Use DHCP: No, Jumbo Frames: Disabled)
- 10.0.0.4:3260 (LAN 4, Use DHCP: No, Jumbo Frames: Disabled)
- 10.0.0.5:3260 (LAN 5, Use DHCP: No, Jumbo Frames: Disabled)
- 10.0.0.6:3260 (LAN 6, Use DHCP: No, Jumbo Frames: Disabled)

- Click **OK** button.
- ▼ -> **Rename Alias:** Use this option to add or change iSCSI alias.
 - Select one of nodes from one controller.
 - Click ▼ -> **Rename Alias**.
 - Enter the Alias Name. Leave it empty to remove the alias.
 - Click **OK** button.

iSCSI Alias

Add or change iSCSI alias.

To add or change the alias name, enter the name below and press OK. To remove an alias, clear out the current name and press OK.

Alias Name:

After creating an alias, it is displayed at the end of the portal information.

| | ID | Auth | Node Name | Portal | Alias |
|---|----|------|-----------------------------------------------------------|------------------------------------------------------------------------|-----------|
| ▼ | 0 | CHAP | iqn.2004-08.com.acnc.jetstor-724hsdv2-00692e2c0.dev0.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | dev0:ctr1 |
| ▼ | 1 | CHAP | iqn.2004-08.com.acnc.jetstor-724hsdv2-00692e2c0.dev1.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| ▼ | 2 | None | iqn.2004-08.com.acnc.jetstor-724hsdv2-00692e2c0.dev2.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |
| ▼ | 3 | None | iqn.2004-08.com.acnc.jetstor-724hsdv2-00692e2c0.dev3.ctr1 | 192.168.6.1:3260, 192.168.2.1:3260, 192.168.3.1:3260, 192.168.4.1:3260 | |




TIP:
After setting CHAP, the host initiator should be set with the same CHAP account. Otherwise, the host cannot connect to the volume.

Active Sessions

The **Active Session** tab is used to display all currently active iSCSI sessions and their connection information. The various controllers support different number of sessions, list on the following:

- **724HS(D) 10G V2:** Up to 256 sessions per controller.
- **724iF(D) V2:** Up to 64 sessions per controller.




This table shows the column descriptions. Most of the options are standard parameters used in the negotiation between the initiator and target when an iSCSI connection is created.

| Column Name | Description |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSIH | TSIH (Target Session Identifying Handle) is used for this active session. |
| Initiator Name | It displays the host computer name. |
| Target Name | It displays the controller name. |
| InitialR2T | InitialR2T (Initial Ready to Transfer) is used to turn off either the use of a unidirectional R2T command or the output part of a bidirectional command. The default value is Yes. |
| Immed. data | Immed. data (Immediate Data) sets the support for immediate data between the initiator and the target. Both must be set to the same setting. The default value is Yes. |
| MaxDataOutR2T | MaxDataOutR2T (Maximum Data Outstanding Ready to Transfer) |

| | |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | determines the maximum number of outstanding ready to transfer per task. The default value is 1. |
| MaxDataBurstLen | MaxDataBurstLen (Maximum Data Burst Length) determines the maximum SCSI data payload. The default value is 256kb. |
| DataSeginOrder | DataSeginOrder (Data Sequence in Order) determines if the PDU (Protocol Data Units) are transferred in continuously non-decreasing sequence offsets. The default value is Yes. |
| DataPDU InOrder | DataPDU InOrder (Data PDU in Order) determines if the data PDUs within sequences are to be in order and overlays forbidden. The default value is Yes. |

The options are available on this tab:

- ▼ -> **Connection Details:** It can list all connection(s) of the selected session.

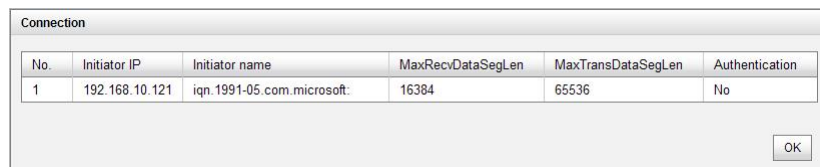

| No. | Initiator IP | Initiator name | MaxRecvDataSegLen | MaxTransDataSegLen | Authentication |
|-----|----------------|----------------------------|-------------------|--------------------|----------------|
| 1 | 192.168.10.121 | iqn.1991-05.com.microsoft: | 16384 | 65536 | No |


- ▼ -> **Disconnect:** Disconnect the selected session, click **OK** button to confirm.

CHAP Accounts

The **CHAP Account** tab is used to manage the CHAP accounts on the system.

The options are available on this tab:

- Create User:** Create a CHAP user.

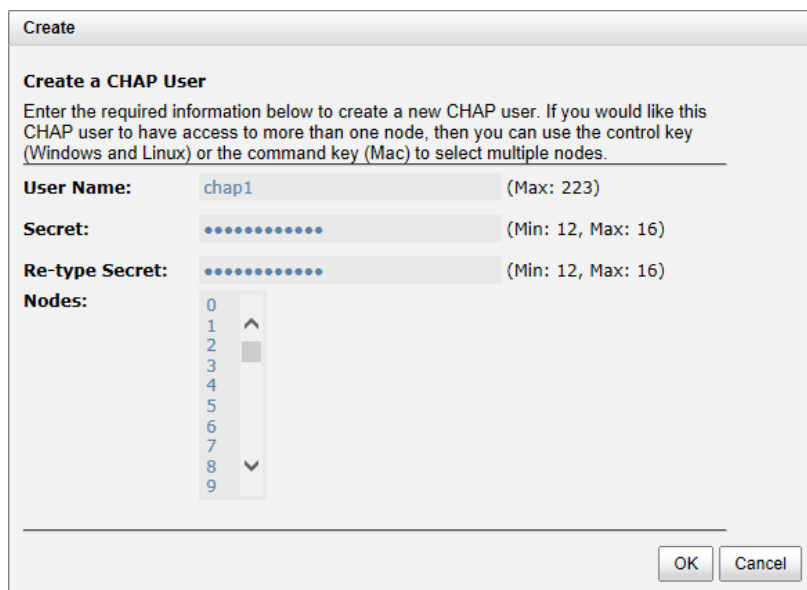

Create

Create a CHAP User

Enter the required information below to create a new CHAP user. If you would like this CHAP user to have access to more than one node, then you can use the control key (Windows and Linux) or the command key (Mac) to select multiple nodes.

User Name: chap1 (Max: 223)


Secret: (Min: 12, Max: 16)

Re-type Secret: (Min: 12, Max: 16)

Nodes: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9

OK Cancel

- Enter the required information for **User Name**, **Secret**, and **Re-type Secret**.
- If you would like this CHAP user to have access, select one or multiple nodes. If selecting none, you can add it later by **iSCSI Configuration -> iSCSI Nodes -> Users**.
- Click **OK** button.

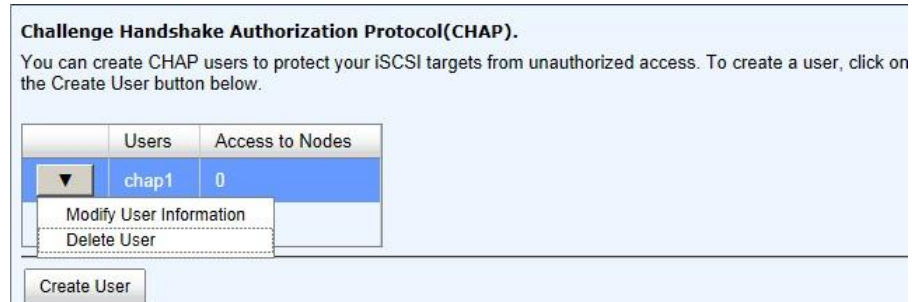

The options are available after creating a CHAP account:

- ▼ -> **Modify User Information:** Modify the selected CHAP user information.
- ▼ -> **Delete User:** Delete the selected CHAP user.

Fibre Channel

The **Fibre Channel** tab is used view the fibre channel information, and change the link speed of FC. It displays the Port ID, Connection Mode, Data Rate, WWNN (World Wide Node Name), WWPN (World Wide Port Name), error count, and the link status.

Show information for: Controller 1 ▼

| | Name | Port ID | Connection Mode | Data Rate | WWNN/WWPN | Loss of Signal | Loss of Sync | Link Failure | Invalid CRC | Link |
|---|--------|---------|-----------------|-----------|--------------------------------------------------|----------------|--------------|--------------|-------------|------|
| ▼ | Port 1 | 1 | Arbitrated Loop | 8 Gb/s | WWNN: 2000001378F70030 WWPN: 2100001378F70030 | 0 | 0 | 0 | 0 | Up |
| ▼ | Port 2 | 1 | Arbitrated Loop | 8 Gb/s | WWNN: 2000001378F70030 WWPN: 2200001378F70030 | 0 | 0 | 0 | 0 | Up |
| ▼ | Port 3 | 1 | Arbitrated Loop | 8 Gb/s | WWNN: 2000001378F70030 WWPN: 2300001378F70030 | 0 | 0 | 0 | 0 | Up |
| ▼ | Port 4 | 1 | Arbitrated Loop | 8 Gb/s | WWNN: 2000001378F70030 WWPN: 2400001378F70030 | 0 | 0 | 0 | 0 | Up |

Clear All Counters

The options are available on this tab:

- **Clear All Counters:** Clear all counters of all fibre channels.
- ▼ -> **Change Link Speed:** There are **Automatic / 2 Gb/s / 4 Gb/s / 8 Gb/s** (for 724iF(D) V2), The default and recommended setting is to automatically detect the data rate.

Data Rate

Select the data rate for Port 4 on Controller 1 below. The default and recommended setting is for the array to automatically detect the data rate.

Data Rate: Automatic

- Automatic
- 2 Gb/s
- 4 Gb/s
- 8 Gb/s

OK Cancel

Data Rate

Select the data rate for Port 1 on Controller 1 below. The default and recommended setting is for the array to automatically detect the data rate.

Data Rate: Automatic

- Automatic
- 4 Gb/s
- 8 Gb/s
- 16 Gb/s


OK Cancel



TIP: Please be aware that there is no “Automatic” in **724iF(D) V2** model.

Volume Configuration

The **Volume configuration** menu option is for accessing the **Physical Disks**, **RAID Groups**, **Virtual Disks**, **Snapshots**, **Logical Units**, and **QReplicas** option tabs.



Physical Disks

The **Physical Disks** tab provides the status of the hard drives in the system. The two drop-down lists at the top enable you to switch between the local system and any expansion JBOD systems attached. The other is to change the drive size units (MB or GB).

Show disk for: Local Show disk size in: GB

| Slot | Size (GB) | RAID Group | RAID Set | Virtual Disk | Status | Health | Usage | Vendor | Serial Number | Rate | Write Cache | Standby | Read-Ahead | Command Queuing |
|------|-----------|------------|----------|--------------|--------|--------|-------|--------|--------------------|------------------|-------------|----------|------------|-----------------|
| 1 | 1862 | | N/A | N/A | Online | Good | Free | WDC | WD-WCAVY4158095 | SATA 6.0Gb/s | Disabled | Disabled | Enabled | Enabled |
| 2 | 1862 | | N/A | N/A | Online | Good | Free | WDC | WD-WCAVY3924333 | SATA 6.0Gb/s | Disabled | Disabled | Enabled | Enabled |
| 3 | 446 | | N/A | N/A | Online | Good | Free | INTEL | CVWL414500UZ480QGN | SATA SSD 6.0Gb/s | Enabled | Disabled | Enabled | Enabled |

Disk Health Check Disk Check Report

This table shows the column descriptions.


| Column Name | Description |
|-------------------|----------------------------------------------------------------------------------------------------------------|
| Slot | The position of a hard drive. The button next to the number of slot shows the functions which can be executed. |
| Size (GB) or (MB) | Capacity of hard drive. The unit can be displayed in GB or MB. |
| RAID Group | RAID group name. |

| | |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RAID Set | <p>The number of RAID Set:</p> <ul style="list-style-type: none"> N/A: The RAID group is traditional provisioning. Number: The RAID group is the number of RAID set of thin provisioning. |
| Virtual Disk | Virtual disk name for SSD caching. |
| Status | <p>The status of the hard drive:</p> <ul style="list-style-type: none"> Online: The hard drive is online. Rebuilding: The hard drive is being rebuilt. Transitioning: The hard drive is being migrated or is replaced by another disk when rebuilding occurs. Scrubbing: The hard drive is being scrubbed. |
| Health | <p>The health of the hard drive:</p> <ul style="list-style-type: none"> Good: The hard drive is good. Failed: The hard drive is failed. Error Alert: S.M.A.R.T. error alerts. Read Errors: The hard drive has unrecoverable read errors. |
| Usage | <p>The usage of the hard drive:</p> <ul style="list-style-type: none"> RAID: This hard drive has been set to a RAID group. Free: This hard drive is free for use. Dedicated Spare: This hard drive has been set as dedicated spare of a RAID group. |

| | |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <ul style="list-style-type: none"> Local Spare: This hard drive has been set as local spare of the enclosure. Global Spare: This hard drive has been set as global spare of whole system. |
| Vendor | Hard drive vendor. |
| Serial Number | Hard drive serial number. |
| Rate | Hard drive rate: <ul style="list-style-type: none"> SAS 6.0Gb/s. SAS 3.0Gb/s. SATA 6.0Gb/s. SATA 3.0Gb/s. SATA 1.5Gb/s. SAS SSD 6.0Gb/s. SATA SSD 6.0Gb/s. |
| Write Cache | Hard drive write cache is enabled or disabled. The default value is Enabled. |
| Standby | HDD auto spindown to save power. The default value is Disabled. |
| Read-Ahead | This feature makes data be loaded to disk's buffer in advance for further use. The default value is Enabled. |
| Command Queuing | Newer SATA and most SCSI disks can queue multiple commands and handle one by one. The default value is Enabled. |

The options are available on this tab:


- Disk Health Check:** Check the health of the selected disks. It cannot check the disks which are in used.

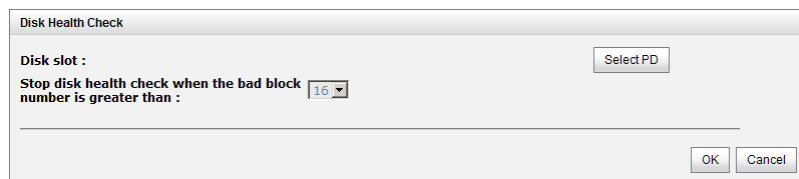

- Disk Check Report:** Download the disk check report. It's available after executing **Disk Health Check**.
- ▼ -> Set Free Disk:** Make the selected hard drive be free for use.
- ▼ -> Set Global Spare:** Set the selected hard drive to global spare of all RIAD groups.
- ▼ -> Set Local Spare:** Set the selected hard drive to local spare of the RIAD groups which located in the same enclosure.
- ▼ -> Set Dedicated Spare:** Set a hard drive to dedicated spare of the selected RAID group.
- ▼ -> Upgrade:** Upgrade the firmware of the hard drive.
- ▼ -> Disk Scrub:** Scrub the hard drive. It's not available when the hard drive is in used.
- ▼ -> Read Error Cleared:** Clean the read error of the hard drive.
- ▼ -> Turn on/off the indication LED:** Turn on the indication LED of the hard drive. Click again to turn off.
- ▼ -> More information:** Display hard drive detail information.

Take an example to set the physical disk to dedicated spare disk.

1. Check ▼ -> **Set Dedicated Spare** at one physical disk.

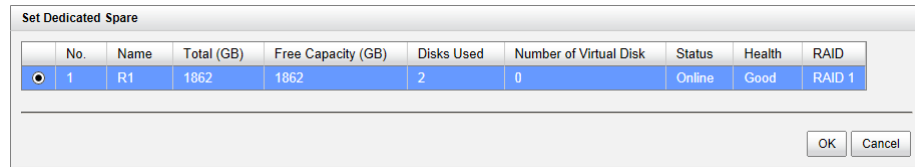

2. If there is any RAID group which is in protected RAID level and can be set with dedicate spare disk, select one RAID group, and then click **OK** button.



TIP:

- The maximum number of physical drives in a system is 256.

RAID Groups

The **RAID Groups** tab provides to create, modify, delete, or view the status of the RAID groups. Use the drop-down list at the top to change the drive size units (MB or GB).

Select the traditional RAID group, it displays on the following.

Show RAID size in: GB ▼

| | Name | Total (GB) | Free Capacity (GB) | Available Size (GB) | Thin Provisioning | Disks Used | Number of Virtual Disk | Status | Health | RAID | Current Controller | Preferred Controller |
|---|------|------------|--------------------|---------------------|-------------------|------------|------------------------|--------|--------|--------|--------------------|----------------------|
| ▼ | R0 | 1862 | 1862 | 1862 | Disabled | 1 | 0 | Online | Good | RAID 0 | Controller 1 | Controller 1 |
| ▼ | R1 | 1862 | 1862 | 1862 | Enabled | 2 | 0 | Online | Good | RAID 1 | Controller 1 | Controller 1 |

Create

This table shows the column descriptions.

| Column Name | Description |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Name | RAID group name. |
| Total (GB) or (MB) | Total capacity of the RAID group. The unit can be displayed in GB or MB. |
| Free Capacity (GB) or (MB) | Free capacity of the RAID group. The unit can be displayed in GB or MB. |
| Available Size (GB) or (MB) | Available capacity of the RAID group. The unit can be displayed in GB or MB. |
| Thin Provisioning | The status of Thin provisioning: <ul style="list-style-type: none"> • Disabled. • Enabled. |
| Disks Uses | The number of physical disks in the RAID group. |

| | |
|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of Virtual Disk | The number of virtual disks in the RAID group. |
| Status | The status of the RAID group: <ul style="list-style-type: none"> • Online: the RAID group is online. • Offline: the RAID group is offline. • Rebuilding: the RAID group is being rebuilt. • Migrating: the RAID group is being migrated. • Scrubbing: the RAID group is being scrubbed. |
| Health | The health of the RAID group: <ul style="list-style-type: none"> • Good: the RAID group is good. • Failed: the RAID group fails. • Degraded: the RAID group is not healthy and not completed. The reason could be lack of disk(s) or have failed disk. |
| RAID | The RAID level of the RAID group. |
| Current Controller <i>(This option is only visible when dual controllers are installed.)</i> | The controller of the RAID group. The default is controller 1. |
| Preferred Controller <i>(This option is only visible when dual controllers are installed.)</i> | The preferred controller of the RAID group. The default is controller 1. |

The options are available on this tab:

- **Create:** Create a RAID group.

The options are available after creating a RAID group:

- ▼ -> **Migrate RAID Level:** Change the RAID level of a RAID group. Please refer to next chapter for details.
- ▼ -> **Move RAID Level:** Move the member disks of RAID group to totally different physical disks.
- ▼ -> **Activate/Deactivate:** Activate or deactivate the RAID group after disk roaming. Activate can be executed when the RAID group status is offline. Conversely, Deactivate can be executed when the status is online. These are for online disk roaming purpose.
- ▼ -> **Verify Parity:** Regenerate parity for the RAID group. It supports the RAID level 3 / 5 / 6 / 30 / 50 / 60.
- ▼ -> **Delete:** Delete the RAID group.
- ▼ -> **Change Preferred Controller:** Set the RAID group ownership to the other controller.
- ▼ -> **Change RAID Options:** Change the RAID property options.
 - Write Cache:

- ✓ Enabled: When the write cache is enabled, data transfer operations are written to fast cache memory instead of being written directly to disk. This may improve performance but may take the data lost risk when losing power if there is no BBM protection.
 - ✓ Disabled: Disable disk write cache. (Default)
 - Standby:
 - ✓ Disabled: Disable auto spin down. (Default)
 - ✓ 30 sec / 1 min / 5 min / 30 min: The hard drives will be spun down for power saving when the disk is idle for the period of time specified.
 - Read-Ahead:
 - ✓ Enabled: The system will discern what data will be needed next based on what was just retrieved from disk and then preload this data into the disks buffer. This feature will improve performance when the data being retrieved is sequential. (Default)
 - ✓ Disabled: Disable disk read ahead.
 - Command Queuing:
 - ✓ Enabled: Sends multiple commands at once to a disk to improve performance. (Default)
 - ✓ Disabled: Disable disk command queuing.
- ▼ -> **Add RAID Set:** Add RAID sets for the thin provisioning RAID group.
- ▼ -> **Add Policy:** Add policy for the thin provisioning RAID group.
- ▼ -> **More information:** Display RAID group detail information.

Select the thin provisioning RAID group, it displays on the following. There are two more tables to describe the properties of the thin provisioning RAID group, RAID Set and RAID Group Policy.

Show RAID size in: GB

| | Name | Total (GB) | Free Capacity (GB) | Available Size (GB) | Thin Provisioning | Disks Used | Number of Virtual Disk | Status | Health | RAID | Current Controller | Preferred Controller |
|---|------|------------|--------------------|---------------------|-------------------|------------|------------------------|--------|--------|--------|--------------------|----------------------|
| ▼ | R0 | 1862 | 1862 | 1862 | Disabled | 1 | 0 | Online | Good | RAID 0 | Controller 1 | Controller 1 |
| ▼ | R1 | 1862 | 1862 | 1862 | Enabled | 2 | 0 | Online | Good | RAID 1 | Controller 1 | Controller 1 |

RAID Set:

| | No | Total Size (GB) | Free Size (GB) | Disks Used | RAID Cell | Status | Health |
|---|----|-----------------|----------------|------------|-----------|--------|--------|
| ▼ | 1 | 1862 | 1862 | 2 | 1 | Online | Good |

RAID Group Policy:

<< first < prev 1 next > last >>

| | No | Threshold | Level | Action |
|---|----|-----------|-------------|------------------------|
| ▼ | 1 | 60% | Information | Take no Action |
| ▼ | 2 | 70% | Information | Take no Action |
| ▼ | 3 | 80% | Information | Take no Action |
| ▼ | 4 | 85% | Warning | Reclaim Space |
| ▼ | 5 | 90% | Warning | Delete Snapshots |
| ▼ | 6 | 95% | Warning | De-activate RAID Group |

<< first < prev 1 next > last >>

Create

This table shows the column descriptions of **RAID Set**.

| Column Name | Description |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No | The number of the RAID set. |
| Total Size(GB) | Total capacity of the RAID set. |
| Free Size (GB) | Free capacity of the RAID set. |
| Disks Used | The number of physical disks in the RAID set. |
| RAID Cell | The number of RAID cell in the RAID set. |
| Status | The status of the RAID set: <ul style="list-style-type: none"> • Online: the RAID set is online. • Offline: the RAID set is offline. • Rebuilding: the RAID set is being rebuilt. • Migrate: the RAID set is being migrated. • Scrubbing: the RAID set is being scrubbed. |
| Health | The health of the RAID set: <ul style="list-style-type: none"> • Good: the RAID set is good. • Failed: the RAID set fails. • Degraded: the RAID set is not healthy and not completed. The reason could be lack of disk(s) or have failed disk. |

The options are available on this tab:

- ▼ -> **Remove:** Remove the selected RAID set.
- ▼ -> **Move RAID Level:** Move the member disks of RAID set to other physical disks.
- ▼ -> **List Disks:** List the member of physical disks.

This table shows the column descriptions of **RAID Group Policy**.


| Column Name | Description |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No | The number of the RAID group policy. |
| Threshold | The threshold of the thin provision RAID group. |
| Level | Define the event log level when the thin provision RAID group usage reaches the threshold. |
| Action | Take action of the system when the thin provision RAID group usage reaches the threshold. <ul style="list-style-type: none"> • Take no Action. • Reclaim Space. • Delete Snapshots. • De-activate RAID Group. |

The options are available on this tab:

- ▼ -> **Delete:** Delete the selected policy.
- ▼ -> **Modify:** Modify the level and the action of the policy.

Take an example of creating a RAID group.

1. Click the **Create** button.

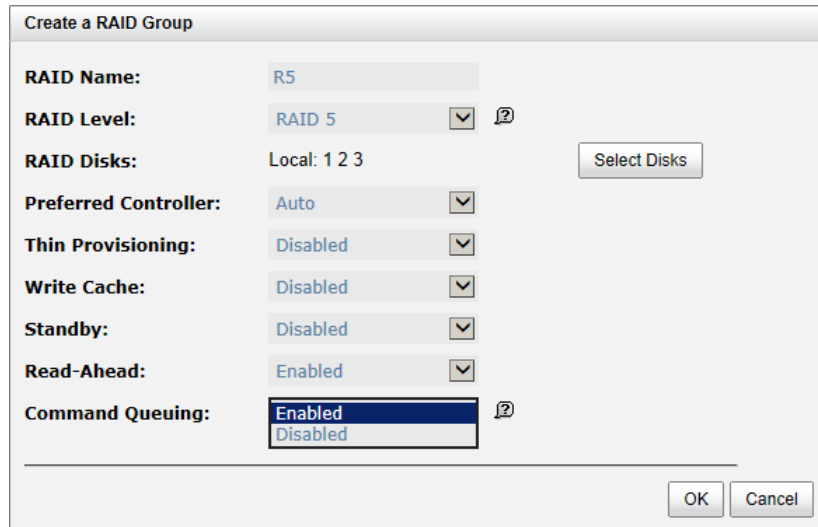

2. Enter a **RAID Name** for the RAID group.
3. Select a **RAID Level** from the drop-down list.
4. Click the **Select Disks** button to select disks from either local or expansion JBOD systems, and click **OK** to complete the selection. The selected disks are displayed at **RAID Disks**.
5. Optionally, configure the following:
 - **Preferred Controller:** This option is only visible when dual controllers are installed. The default value is Auto.
 - **Thin Provisioning:** This option is only visible when thin provisioning feature is enabled. The default value is Disabled.
 - **Write Cache:** It's to enable or disable the write cache option of hard drives. The default value is Disabled.
 - **Standby:** It's to enable or disable the auto spin down function of hard drives, when this option is enabled and hard drives have no I/O access after certain period of time, they will spin down automatically. The default value is Disabled.
 - **Read-Ahead:** It's to enable or disable the read ahead function. The default value is Enabled.
 - **Command Queuing:** It's to enable or disable the hard drives' command queue function. The default value is Enabled.
6. At the confirmation dialog, click **OK** button to create the RAID group.



TIP:

- The maximum number of physical drives in a RAID group is 64.

Virtual Disks

The **Virtual Disks** tab provides to create, modify, delete, or view the status of the virtual disk. Use the drop-down list at the top to change the drive size units (MB or GB).

This table shows the column descriptions.

| Column Name | Description |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name | Virtual disk name. |
| Size (GB) or (MB) | Total capacity of the virtual disk. The unit can be displayed in GB or MB. |
| SSD Caching | The SSD caching policy: <ul style="list-style-type: none"> • Disable: Disable SSD caching. • Database: Enable SSD caching and set it as database policy. • File System: Enable SSD caching and set it as file system policy. • Web Service: Enable SSD caching and set it as web service policy. • Custom: Enable SSD caching and set it as customization policy. |
| Write | The right of virtual disk: <ul style="list-style-type: none"> • WT: Write Through. • WB: Write Back. • RO: Read Only. |
| Priority | The priority of virtual disk: <ul style="list-style-type: none"> • HI: High priority. • MD: Middle priority. • LO: Low priority. |
| Bg Rate | Background task priority: <ul style="list-style-type: none"> • 4 / 3 / 2 / 1 / 0: Default value is 4. The higher number the background priority of a VD is, the more background I/O will be scheduled to execute. |
| Type | The type of the virtual disk: <ul style="list-style-type: none"> • RAID: the virtual disk is normal. • BACKUP: the virtual disk is for backup usage. |
| Clone | The clone target name of the virtual disk. |
| Schedule Clone | The clone schedule of the virtual disk. |
| Status | The status of the virtual disk: <ul style="list-style-type: none"> • Online: The virtual disk is online. • Offline: The virtual disk is offline. • Initiating: The virtual disk is being initialized. • Rebuilding: The virtual disk is being rebuilt. • Migrating: The virtual disk is being migrated. • Rollback: The virtual disk is being rolled back. • Parity checking: The virtual disk is being parity check. |
| Health | The health of virtual disk: <ul style="list-style-type: none"> • Optimal: the virtual disk is working well and there is no failed disk in |

| | |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | the RG. |
| | <ul style="list-style-type: none"> • Degraded: At least one disk from the RG of the Virtual disk is failed or plugged out. • Failed: the RAID group disk of the VD has single or multiple failed disks than its RAID level can recover from data loss. • Partially optimal: the virtual disk has experienced recoverable read errors. After passing parity check, the health will become Optimal. |
| R % | Ratio (%) of initializing or rebuilding. |
| RAID | RAID level. |
| LUN # | Number of LUN(s) that virtual disk is attached. |
| Snapshot space (GB) or (MB) | The virtual disk size that is used for snapshot. The number means Used snapshot space / Total snapshot space. The unit can be displayed in GB or MB. |
| Snapshot # | Number of snapshot(s) that have been taken. |
| RAID Group | The RAID group name of the virtual disk. |

The options are available on this tab:

- **Create:** Create a virtual disk.
- **Cloning Options:** Set the clone options. Detail is described in chapter 5.


The options are available after creating a virtual disk:

- ▼ -> **Extend:** Extend the virtual disk capacity.
- ▼ -> **Set SSD Caching:** Set SSD caching for the virtual disk. Detail is described in chapter 5.
- ▼ -> **Verify Parity:** Execute parity check for the virtual disk. It supports RAID 3 / 5 / 6 / 30 / 50 / 60. The options are:
 - Verify and repair data inconsistencies.
 - Only verify for data inconsistencies. Stop verifying when 1 10 20 30 40 50 60 70 80 90 100 inconsistencies have been found.
- ▼ -> **Delete:** Delete the virtual disk.
- ▼ -> **Set Properties:** Change the virtual disk name, cache mode, priority, bg rate, read-ahead, AV-media mode, and type.
 - Cache Mode:
 - ✓ Write-through Cache: A caching technique in which the completion of a write request is not signaled until data is safely stored in non-volatile media. Each data is synchronized in both data cache and accessed physical disks.
 - ✓ Write-back Cache: A caching technique in which the completion of a write request is signaled as soon as the data is in cache and actual writing to non-volatile media occurs at a later time. It speeds up system write performance but needs to bear the risk where data may be inconsistent between data cache and the physical disks in one short time interval. (Default)
 - ✓ Read-Only: Set the volume to be read-only, any write request is forbidden.
 - Priority:

- ✓ High Priority. (Default)
 - ✓ Medium Priority.
 - ✓ Low Priority.
- Bg Rate:
 - ✓ 4 / 3 / 2 / 1 / 0: Default value is 4. The higher number the background priority of a virtual disk has, the more background I/O will be scheduled to execute.
- Read-Ahead:
 - ✓ Enabled: The system will discern what data will be needed next based on what was just retrieved from disk and then preload this data into the disks buffer. This feature will improve performance when the data being retrieved is sequential. (Default)
 - ✓ Disabled: Disable disk read ahead.
- AV-Media Mode:
 - ✓ Enabled: Enable AV-media mode for optimizing video editing.
 - ✓ Disabled: Disable AV-media mode. (Default)
- Type:
 - ✓ RAID: The virtual disk is normal. (Default)
 - ✓ Backup Target: The virtual disk is used for clone or QReplica usage.
- ▼ -> **Space Reclamation:** Reclaim space for the virtual disk.
- ▼ -> **Attach LUN:** Attach a logical unit number to the virtual disk.
- ▼ -> **Detach LUNs:** Detach a logical unit number from the virtual disk.
- ▼ -> **List LUNs:** List all of the attached logical unit numbers.
- ▼ -> **Set Clone:** Set the target virtual disk for clone.
- ▼ -> **Clear Clone:** Clear the clone.
- ▼ -> **Start Clone:** Start the clone.
- ▼ -> **Stop Clone:** Stop the clone.
- ▼ -> **Change QReplica Options:** Change the clone to QReplica relationship.
- ▼ -> **Schedule Clone:** Set the clone function by schedule.
- ▼ -> **Set Snapshot Space:** Set snapshot space for preparing to take snapshots.
- ▼ -> **Cleanup Snapshots:** Clean all snapshots of the virtual disk and release the snapshot space.
- ▼ -> **Take a Snapshot:** Take a snapshot on the virtual disk.
- ▼ -> **Schedule Snapshots:** Set the snapshots by schedule.
- ▼ -> **List Snapshots:** List all snapshots of the virtual disk.
- ▼ -> **More Information:** Show the detail information of the virtual disk.

Take an example of creating a virtual disk.

1. Click **Create** button.

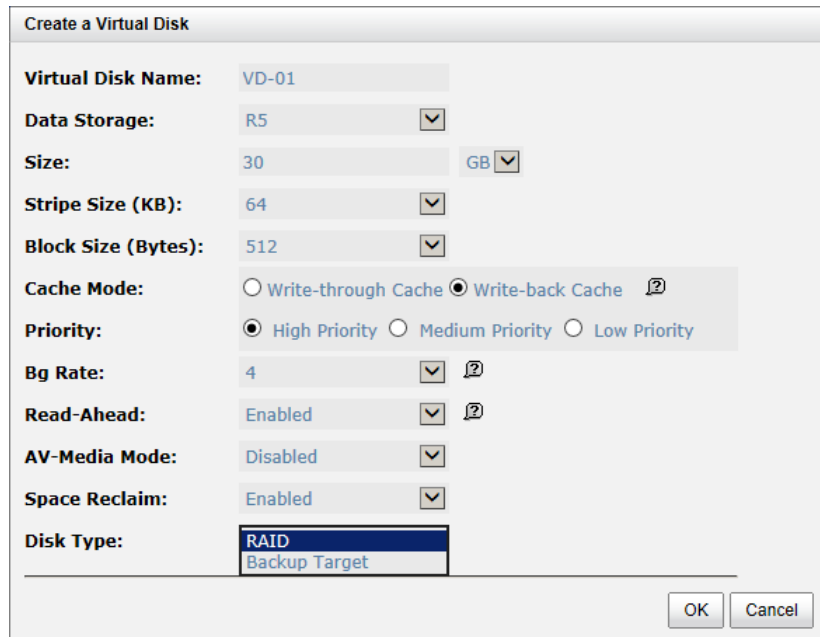

2. Enter a **Virtual Disk Name** for the virtual disk.
3. Select a **Data Storage** from the drop-down list.
4. Enter required **Size**.
5. Optionally, configure the following:
 - **Stripe Size (KB):** The options are 4KB, 8KB, 16KB, 32KB, and 64KB. The default value is 64KB.
 - **Block Size (Bytes):** The options are 512 to 65536. The default value is 512 bytes.
 - **Cache Mode:** The options are Write-through Cache and Write-back Cache. The default value is Write-back Cache.
 - **Priority:** The options are High, Medium and Low Priority. The default value is High priority.
 - **Bg Rate:** Background task priority. The higher number the background priority of a virtual disk has, the more background I/O will be scheduled to execute. The options are 0 to 4. The default value is 4.
 - **Read-Ahead:** The system will discern what data will be needed next based on what was just retrieved from disk and then preload this data into the disks buffer. This feature will improve performance when the data being retrieved is sequential. The default value is Enabled.
 - **AV-Media Mode:** Optimize for video editing. The default value is Disabled.
 - **Erase:** This option is available when the RAID group is not thin provisioning. This option will wipe out old data in virtual disk to prevent that OS recognizes the old partition.

The options are Do Not Erase, erase First 1GB or Full Disk. The default value is Do Not Erase.

- **Space Reclaim:** This option is available when the RAID group is thin provisioning. There are Enabled or Disabled. The default value is Enabled.
- **Fast Rebuild:** This option is available when the RAID group is not RAID 0. There are Enabled or Disabled. The default value is Disabled.
- **Disk Type:** Select type for normal or backup usage. The options are RAID (for general usage) and Backup Target (for Clone or QReplica). The default value is RAID.

6. Click **OK** button to create the virtual disk.



TIP:

- The maximum number of virtual disks in a RAID group is 96. The maximum host number per virtual disk is 16. The maximum host number per controller is 64. The maximum virtual disk number in a system is 2048. The max virtual disk number for snapshot is 32.




CAUTION:

If shutdown or reboot the system when creating a virtual disk, the erase process will stop.

Snapshots

The **Snapshots** tab provides to create, modify, delete, or view the status of snapshot. The two drop-down lists at the top enable you to switch the virtual disks. The other is to change the drive size units (MB or GB).

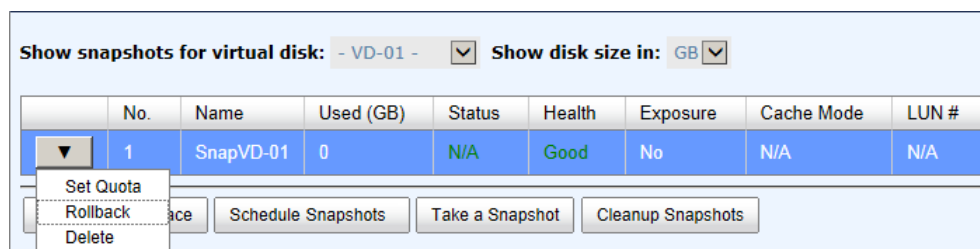

| No. | Name | Used (GB) | Status | Health | Exposure | Cache Mode | LUN # |
|-----|-----------|-----------|--------|--------|----------|------------|-------|
| 1 | SnapVD-01 | 0 | N/A | Good | No | N/A | N/A |

This table shows the column descriptions.

| Column Name | Description |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No. | Number. |
| Name | Snapshot name. |
| Used (GB) or (MB) | The amount of the snapshot space that has been used. The unit can be displayed in GB or MB. |
| Status | The status of the snapshot: <ul style="list-style-type: none"> N/A: The snapshot is normal. Replicated: The snapshot is for clone or QReplica usage. Abort: The snapshot is over space and abort. |
| Health | The health of the snapshot: <ul style="list-style-type: none"> Good: The snapshot is good. Failed: The snapshot fails. |
| Exposure | The snapshot is exposed or not. |
| Cache Mode | The cache mode of the snapshot: <ul style="list-style-type: none"> N/A: Unknown when the snapshot is unexposed. Read-write: The snapshot can be read / write. Read-only: The snapshot is read only. |
| LUN # | Number of LUN(s) that snapshot is attached. |
| Time Created | The created time of the snapshot. |

The options are available on this tab:

- **Set Snapshot Space:** Set snapshot space for preparing to take snapshots.
- **Schedule Snapshots:** Set the snapshots by schedule.
- **Take a Snapshot:** Take a snapshot on the virtual disk.
- **Cleanup Snapshots:** Clean all snapshots of the virtual disk and release the snapshot space.

The options are available after taking a snapshot:


- ▼ -> **Set Quota:** Set the snapshot quota.
- ▼ -> **Rollback:** Rollback the snapshot.
- ▼ -> **Delete:** Delete the snapshot.

The options are available after setting the quota of the snapshot:

- ▼ -> **Unexpose:** Unexpose the snapshot VD.
- ▼ -> **Attach LUN:** Attach a logical unit number to the snapshot.
- ▼ -> **Detach LUNs:** Detach a logical unit number from the virtual disk.
- ▼ -> **List LUNs:** List all of the attached logical unit numbers.

Take an example of taking a snapshot.

1. Before taking a snapshot, it must reserve some storage space for saving variant data. Click **Set Snapshot Space** button.

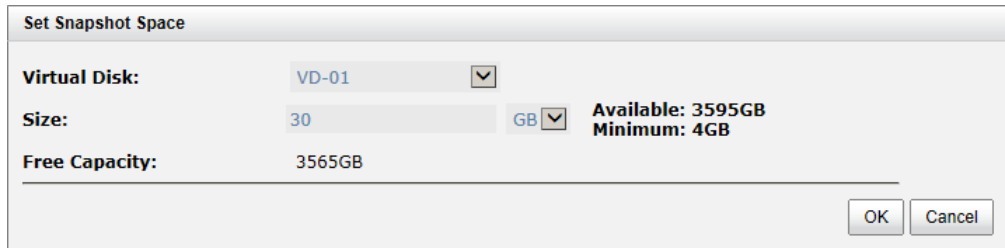

Set Snapshot Space

Virtual Disk: VD-01

Size: 30 GB **Available: 3595GB**
Minimum: 4GB

Free Capacity: 3565GB


OK Cancel

2. Select a **Virtual Disk** from the drop-down list.
3. Enter a **Size** which is reserved for the snapshot space.
4. Click **OK** button. The snapshot space is created.
5. Click **Take a Snapshot** button.
6. Use the drop-down list to select a **Virtual Disk**.
7. Enter a **Snapshot Name**.
8. Click **OK** button. The snapshot is taken.

Show snapshots for virtual disk: - VD-01 - Show disk size in: GB

| No. | Name | Used (GB) | Status | Health | Exposure | Cache Mode | LUN # | Time Created |
|-----|-----------|-----------|--------|--------|----------|------------|-------|--------------------------|
| 1 | SnapVD-01 | 0 | N/A | Good | No | N/A | N/A | Tue Feb 11 17:32:24 2014 |

9. Set quota to expose the snapshot. Click ▼ -> **Set Quota** option.

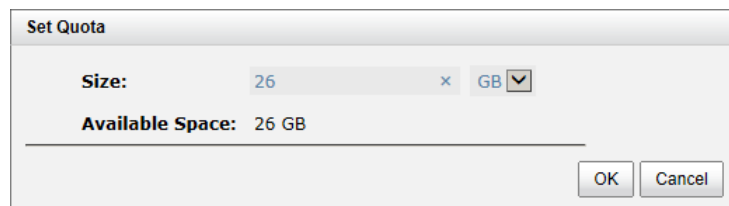

Set Quota

Size: 26 x GB

Available Space: 26 GB

OK Cancel

10. Enter a size which is reserved for the snapshot. If the size is zero, the exposed snapshot will be read only. Otherwise, the exposed snapshot can be read / written, and the size will be the maximum capacity for writing.
11. Attach LUN to the snapshot.

Attach LUN

Attach a logical unit number (LUN) to a virtual disk.

Virtual Disk: SnapVD-01(30 GB) ▼

Allowed Hosts: * Add Host

Target: 0 ▼

LUN: -LUN 1- ▼

Permission: Read-only Read-write

OK Cancel

12. Done. The snapshot can be used.



TIP:

- The maximum snapshot number per virtual disk is 64.

Logical Units

The **Logical Units** tab provides to attach, detach or view the status of logical unit numbers for each virtual disk. Example:

| | Allowed Hosts | Target | LUN | Permission | Virtual Disk | Number of Session |
|---|---------------------------|--------|-----|------------|--------------|-------------------|
| ▼ | * | 0 | 0 | Read-write | VD-01 | 0 |
| ▼ | iqn.1991-05.com.microsoft | 0 | 1 | Read-only | VD-02 | 0 |

Attach LUN

This table shows the column descriptions.

| Column Name | Description |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Allowed Hosts | The FC node name / iSCSI node name for access control or a wildcard (*) for access by all hosts. |
| Target | The number of the target. |
| LUN | The number of the LUN assigned. |
| Permission | The permission level: <ul style="list-style-type: none"> • Read-write. • Read-only. |
| Virtual Disk | The name of the virtual disk assigned to this LUN. |
| Number of Session | The number of the active connection linked to the logical unit. |
| <i>(This option is only visible when</i> | |

the controller has iSCSI ports.)

The options are available on this tab:


- **Attach LUN:** Attach a logical unit number to the virtual disk.

The options are available after attaching LUN:

- ▼ -> **Detach LUNs:** Detach a logical unit number from the virtual disk.

Take an example of attaching a LUN.

1. Click the **Attach LUN** button.

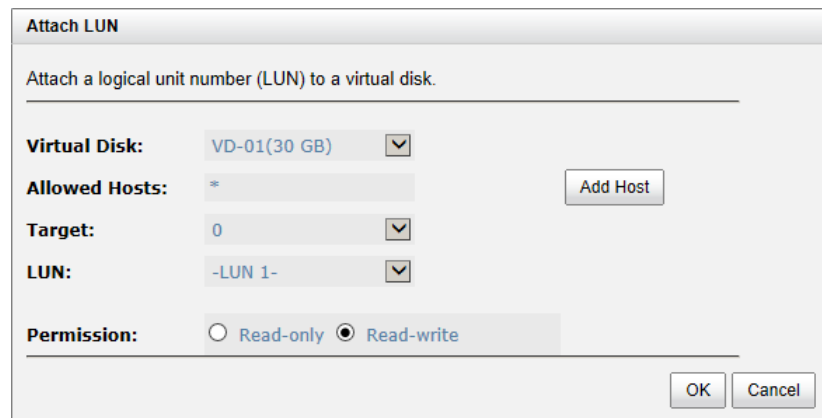

2. Select the **Protocol**. (FC models only)
3. Select a **Virtual Disk** from the drop-down list.
4. Enter the **Allowed Hosts** with semicolons (;) or click **Add Host** button to add one by one. Fill-in wildcard (*) for access by all hosts.
5. Select a **Target** number from the drop-down list.
6. Select a **LUN** from the drop-down list.
7. Check the **Permission** level.
8. Click **OK** button.

The matching rules of access control are followed from created time of the LUNs. The earlier created LUN is prior to the matching rules. For example: there are two LUN rules for the same VD, one is *, **LUN 0**; and the other is **iqn.host1**, **LUN 1**. The host **iqn.host2** can login successfully because it matches the rule 1.

Wildcard * and ? are allowed in this field. * can replace any word. ? can replace only one character. For example:

- **iqn.host?** -> **iqn.host1** and **iqn.host2** are accepted.
- **iqn.host*** -> **iqn.host1** and **iqn.host12345** are accepted.

This field cannot accept comma, so **iqn.host1, iqn.host2** stands a long string, not two iqns.



TIP:

- The maximum LUN number is 2048.

QReplicas

The **QReplicas** tab provides to create, rebuild, delete, or manage the replication tasks.

Show disk size in: GB

Task:

| No. | Source Virtual Disk | Status | % | Shaping | Speed (MB) | Target Virtual Disk | Size (GB) | Schedule | Time Created | Vendor | Model | WWN |
|-----|---------------------|--------|---|---------|------------|---------------------|-----------|----------|--------------------------|--------|-------|-----------------|
| 1 | SourceVD | Online | | N/A | 0 | TargetVD | 10 | N/A | Thu Oct 16 16:02:00 2014 | | | 201001378900cc0 |

Task 'SourceVD' Path:

| No. | Source NIC | Target IP | Target Name | LUN | Status |
|-----|------------|-----------|----------------------------|-----|-----------|
| 1 | LAN1 | 10.0.0.2 | iqn.2004-08.com :dev0.ctr1 | 1 | Connected |

This table shows the **Task** column descriptions.

| Column Name | Description |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No. | Number. |
| Source Virtual Disk | The source name of the virtual disk. |
| Status | The status of the task: <ul style="list-style-type: none"> • Online: The task is normal and idle. • Initiating: The source virtual disk is initiating. • Offline: The source virtual disk is offline. • Queued: The task is queued. When multiple tasks are replicating, one task is running, the others are queued. • Replicating: The task is running. • Missing: The target virtual disk does not exist. • N/A: It's unavailable to get the status of the source virtual disk when the system is busy. |
| % | Ratio of the replication task. |
| Shaping | Apply the number of the shaping group. |
| Speed (MB) | Replication speed. |
| Target Virtual Disk | The target name of the virtual disk. |
| Size (GB) or (MB) | Total capacity of the target virtual disk. |
| Schedule | The status of the schedule: <ul style="list-style-type: none"> • N/A: No schedule for the replication task. • Icon: The schedule of the replication task is set. |

| | |
|--------------|-------------------------------------|
| Time Created | The created time of the task. |
| Vendor | The vendor of the target. |
| Model | The model of the target. |
| WWN | The WWN of the target virtual disk. |

This table shows the **Task Path** column descriptions.

| Column Name | Description |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No. | Number. |
| Source NIC | The NIC port of the source side for the replication task. |
| Target IP | The IP address of the target side. |
| Target Name | The iSCSI node name of the target side. |
| LUN | The number of the LUN assigned. |
| Status | The status of the connection: <ul style="list-style-type: none"> • Connecting: The replication task pair is connecting. • Connected: The replication task pair is connected. • Disconnected: The replication task pair is disconnected. • Recovering: The replication task pair is reconnecting when it's disconnected. |

The options are available on this tab:

- **Create:** Create a replication task.
- **Rebuild:** Rebuild the replication task which is changed from a cloning job.
- **QReplica Options:** Set replication options.
- **Shaping Setting Configuration:** Set task shaping configurations.

The options are available after creating a replication task in the **Task** table:

- ▼ -> **Start:** Start the replication task.
- ▼ -> **Stop:** Stop the replication task.
- ▼ -> **Set Task Shaping:** Set task shaping group.
- ▼ -> **Add Path:** Add multi path for the replication task.
- ▼ -> **Schedule:** Set the replication task by schedule.
- ▼ -> **Delete:** Delete the replication task.


The options are available after creating a replication task in the **Task Path** table:

- ▼ -> **Add Connection:** Add a connection of the replication task.
- ▼ -> **Delete Connection:** Delete the connection for the replication task.
- ▼ -> **Delete:** Delete multi path of the replication task.

More detail is described in chapter 5.

Enclosure Management

The **Enclosure Management** menu option is for accessing the **Hardware Monitor**, **UPS**, **SES**, and **S.M.A.R.T.** option tabs.



For the enclosure management, there are many sensors for different purposes, such as temperature sensors, voltage sensors, hard disk status, fan sensors, power sensors, and LED status. Due to the different hardware characteristics among these sensors, they have different polling intervals. Below are the details of the polling time intervals:

- Temperature sensors: 1 minute.
- Voltage sensors: 1 minute.
- Hard disk sensors: 10 minutes.
- Fan sensors: 10 seconds. When there are 3 errors consecutively, system sends ERROR event log.
- Power sensors: 10 seconds, when there are 3 errors consecutively, system sends ERROR event log.
- LED status: 10 seconds.

Hardware Monitor

The **Hardware Monitor** tab displays the information of current voltages and temperatures, also provides an Auto shutdown option. Example:

Show information for: Temperature (Internal)/(Case):

Controller 1 Monitors

| Type | Item | Value | Status |
|-------------|----------------|-----------------------------------------------|---------------|
| Voltage | On Board Vcore | +0.99 V (min = +0.75 V, max = +1.35 V) | OK |
| Voltage | Onboard +3.3V | +3.34 V (min = +3.10 V, max = +3.50 V) | OK |
| Voltage | Onboard +5V | +5.00 V (min = +4.60 V, max = +5.40 V) | OK |
| Voltage | Onboard +12V | +12.04 V (min = +11.04 V, max = +12.96 V) | OK |
| Voltage | On Board Vddr | +1.50 V (min = +1.39 V, max = +1.60 V) | OK |
| Temperature | CPU Core 0 | +48.0 (C) (hyst = +5.0 (C), high = +79.0 (C)) | OK |
| Temperature | CPU Core 1 | +46.0 (C) (hyst = +5.0 (C), high = +79.0 (C)) | OK |
| Temperature | iSCSI NIC 1 | +36.0 (C) (hyst = +0.0 (C), high = +65.0 (C)) | OK |
| Temperature | iSCSI NIC 2 | +36.0 (C) (hyst = +0.0 (C), high = +65.0 (C)) | OK |
| Temperature | System Board | +40.0 (C) (hyst = +5.0 (C), high = +65.0 (C)) | OK |
| Temperature | SAS Expander | +63.0 (C) (hyst = +5.0 (C), high = +90.0 (C)) | OK |
| Temperature | Location BBM | N/A | Not installed |

Backplane

| Type | Item | Value | Status |
|--------------|------------|-----------------------------------------------|--------|
| Voltage | PSU +5V | +5.07 V (min = +4.60 V, max = +5.40 V) | OK |
| Voltage | PSU +12V | +12.08 V (min = +11.04 V, max = +12.96 V) | OK |
| Voltage | PSU +3.3V | +3.38 V (min = +3.04 V, max = +3.56 V) | OK |
| Temperature | Location 1 | +26.0 (C) (hyst = +0.0 (C), high = +55.0 (C)) | OK |
| Temperature | Location 2 | +29.0 (C) (hyst = +0.0 (C), high = +55.0 (C)) | OK |
| Temperature | Location 3 | +26.0 (C) (hyst = +0.0 (C), high = +55.0 (C)) | OK |
| Temperature | Location 4 | +25.0 (C) (hyst = +0.0 (C), high = +55.0 (C)) | OK |
| Temperature | Location 5 | +26.0 (C) (hyst = +0.0 (C), high = +55.0 (C)) | OK |
| Temperature | Location 6 | +25.0 (C) (hyst = +0.0 (C), high = +55.0 (C)) | OK |
| Temperature | Location 7 | +25.0 (C) (hyst = +0.0 (C), high = +55.0 (C)) | OK |
| Temperature | Location 8 | +25.0 (C) (hyst = +0.0 (C), high = +55.0 (C)) | OK |
| Power Supply | PSU1 | N/A | OK |
| Power Supply | PSU2 | N/A | OK |
| Cooling | FAN1 | 3375 RPM | OK |
| Cooling | FAN2 | 3590 RPM | OK |
| Cooling | FAN3 | 3515 RPM | OK |
| Cooling | FAN4 | 3515 RPM | OK |

Auto Shutdown:

If auto shutdown is enabled, the system will shut down automatically when the internal power l

If **Auto Shutdown** is checked, the system will shut down automatically when the voltage or temperature is out of the normal range. For better data protection, it is recommended to check **Auto Shutdown**.

For better protection and avoiding single short period of high temperature that could trigger an automatic shutdown, the system uses to gauge if a shutdown is needed. This is done using several sensors placed on key systems that the system checks every 30 seconds for present temperatures.

- The core processor temperature limit is 80°C.
- The interface temperature limit is 65°C.
- The SAS Controller and SAS Expander temperature limits are 65°C.

When one of these sensors reports a temperature above the threshold for three continuous minutes, the system shuts down automatically.

UPS

The **UPS** tab is used to set up a UPS (Uninterruptible Power Supply).

The system supports Smart-UPS made by APC, and Megatec series UPS.
 Choose Smart-UPS for APC products, Megatec-UPS for Megatec series products, or none if you are using a UPS

| | |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UPS Type: | Smart-UPS (SNMP) <input type="button" value="v"/> |
| Shutdown Battery Level (%): | 20 <input type="button" value="v"/> |
| Shutdown Delay (Seconds): | 0 <input type="button" value="v"/> |
| Shutdown UPS: | OFF <input type="button" value="v"/> |
| IP address: | <input type="text"/> |
| Community: | <input type="text"/> |
| UPS Status: | <input type="text"/> |
| UPS Battery Level: | <div style="width: 100px; height: 15px; background-color: #ccc; position: relative;"> <div style="width: 5px; height: 100%; background-color: #007bff; position: absolute; left: 0;"></div> 0% </div> |

Currently, the system only supports and communicates with Smart-UPS series by APC (American Power Conversion Corp, <http://www.apc.com/>) and Megatec UPS.



TIP:

Connection with other vendors of UPS can work well, but they have no such communication features with the system.

Now we support the traditional UPS via serial port and network UPS via SNMP. If using the UPS with serial port, connect the system to UPS via the included cable for communication. (The cable plugs into the serial cable that comes with the UPS.) Then set up the shutdown values for when the power goes out.

This table shows the available options and their descriptions.

| Options | Description |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UPS Type | Select UPS Type: <ul style="list-style-type: none"> None: No UPS or other vendors. Smart-UPS (Serial port): APC Smart-UPS with serial port. Smart-UPS (SNMP): APC Smart-UPS with network function. Megatec-UPS: Megatec UPS. |
| Shutdown Battery Level (%) | When the battery level goes down and lower than the configured threshold, the system will auto shutdown. This function will be disabled if <u>the configured threshold is set to 0.</u> |
| Shutdown Delay (Seconds) | When there is the power outage happening, if the power cannot be recovered within the configured time, such as 30 seconds, the system will auto shutdown at the moment. This function will be disabled if <u>the configured seconds is set to 0.</u> |

| | |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shutdown UPS | <p>The status of shutdown UPS:</p> <ul style="list-style-type: none"> ON: The system will send the command to shut down the connected UPS if one of the above functions is triggered when the power outage is happening. OFF: <u>Disable this function.</u> |
| IP Address <i>(This option is only visible when the UPS type is Smart-UPS (SNMP).)</i> | The IP address of the network UPS. |
| Community <i>(This option is only visible when the UPS type is Smart-UPS (SNMP).)</i> | The SNMP community of the network UPS. |
| Status | <p>The status of UPS:</p> <ul style="list-style-type: none"> Detecting... Running Unable to detect UPS Communication lost UPS reboot in progress UPS shutdown in progress Batteries failed. Please change them NOW! |
| <u>Battery level (%)</u> | <u>Current power percentage of battery level.</u> |

The system will shut down either **Shutdown Battery level (%)** or **Shutdown Delay (Seconds)** reaches the condition. User should set these values carefully.

SES

The **SES** (SCSI Enclosure Services, one of the enclosure management standards) tab is used to enable or disable the management of SES.

SCSI Enclosure Services (SES)

SES is an enclosure management standard. Use this screen to enable or disable SES.

| Allowed Hosts | Target | LUN |
|---------------|--------|-----|
| * | 0 | 0 |

The options are available on this tab:

- Enable:** Click the **Enable** button to enable SES.
- Disable:** Click the **Disable** button to disable SES.

The SES client software is available at the following web site:

SANtools: <http://www.santools.com/>

S.M.A.R.T.

S.M.A.R.T. (Self-Monitoring Analysis and Reporting Technology) is a diagnostic tool for hard drives to deliver warning of drive failures in advance. It provides users a chance to take actions before a possible drive failure.

Self-Monitoring Analysis and Reporting Technology (S.M.A.R.T.)
 Below is the current S.M.A.R.T. information for the drives attached to this device.
 S.M.A.R.T. provides users with an opportunity to take action before possible drive failure.

Show information for: Local Temperature (Internal)/(Case): C D

| Slot | HDD Rate | Media Wea | Reallocated Sec | Erase Fail | Unexpected Pc | Uncorrectable | Temperatur | Read Error | Spin Up (Time) | Seek Error #R | Spin Up (Ret) | Calibration (Re |
|------|--------------|-----------|-----------------|------------|---------------|---------------|------------|------------|----------------|---------------|---------------|-----------------|
| 1 | SATA 6.0Gb/s | N/A | 200(140) | N/A | N/A | N/A | N/A | 200(51) | 177(21) | 200(0) | 100(0) | 100(0) |
| 2 | SATA 6.0Gb/s | N/A | 200(140) | N/A | N/A | N/A | N/A | 200(51) | 161(21) | 200(0) | 100(0) | 100(0) |
| 3 | SATA 6.0Gb/s | N/A | 200(140) | N/A | N/A | N/A | N/A | 200(51) | 166(21) | 200(0) | 100(0) | 100(0) |

S.M.A.R.T. measures many attributes of the hard drive all the time and inspects the properties of hard drives which are close to be out of tolerance. The advanced notice of possible hard drive failure can allow users to back up hard drive or replace the hard drive. This is much better than hard drive crash when it is writing data or rebuilding a failed hard drive.

This tool displays S.M.A.R.T. information of hard drives. The number is the current value; the number in parenthesis is the threshold value. The threshold values from different hard drive vendors are different; please refer to hard drive vendors' specification for details.

S.M.A.R.T. only supports SATA drives. SAS drives do not have this function and will show N/A in the web page.

System Maintenance

The **System Maintenance** menu option is accessing the **System Information**, **Event Log**, **Upgrade**, **Firmware Synchronization** (This option is only visible when dual controllers is installed.), **Reset to Factory Defaults**, **Configuration Backup**, **Volume Restoration**, and **Reboot and Shutdown** option tabs.



System Information

The **System Information** provides to display system information. It includes CPU Type, installed System Memory, Firmware Version, SAS IOC Firmware No., SAS Expander Firmware No., MAC/SAS

Address, Controller Hardware No., Master Controller, Backplane ID, JBOD MAC/SAS Address, Status, Error Message (This item is only visible when the system status is Degraded or Lockdown.), QReplica, QThin, and SSD Caching status.

| Item | Information |
|---------------------------|-----------------------------------------------------------------------------------|
| CPU Type | Intel(R) S1200 series |
| System Memory | 4096 MB |
| Firmware Version | JetStor-724HSDv2 3.7.1 (build 201511091900) |
| SAS IOC Firmware No. | 17.00.01.00 |
| SAS Expander Firmware No. | Local Controller 1 : 1210 Controller 2 : 1210 |
| MAC/SAS Address | 001378C897E0 (Controller 1 : 500137800692E2C0 , Controller 2 : 500137800692E980) |
| Controller HW No. | Controller 1: 2.12 Controller 2: 2.12 |
| Master Controller | Controller 1 |
| Serial Number (S/N) | QS42416021501101 |
| Backplane ID and HW No. | QB424 1.03 |
| JBOD MAC/SAS Address | No JBOD is connected. |
| Status | Normal |
| QReplica | Activated |
| QThin | Activated |
| SSD Caching | Inactive |

[Download Service Package](#)

This table shows the **Status** descriptions.

| Status | Description |
|----------|-----------------------------------------------------------------------------------------------------|
| Normal | Dual controllers and JBODs are in normal stage. |
| Degraded | One controller or JBOD fails or has been plugged out. |
| Lockdown | The firmware of two controllers is different or the size of memory of two controllers is different. |
| Single | Single controller mode. |

The options are available on this tab:

- **Download System Information:** Download the system information for debug.



CAUTION:


If you try to increase the system memory and running in dual controller mode, please make sure both controllers have the same DIMM on each corresponding memory slot. Failing to do so will result in controller malfunction, which will not be covered by warranty.

Event log

The **Event Log** tab provides a log or event messages. Choose the buttons of INFO, WARNING, or ERROR levels to display those particular events.

The options are available on this tab:

- **Download:** Save the event log as a file. It will pop up a filter dialog as the following. The default it “Download all event logs”.

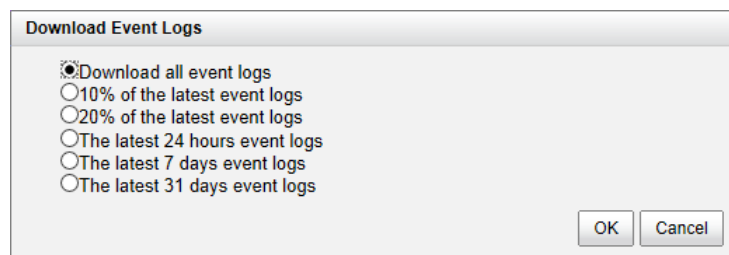

- **Mute Buzzer:** Stop alarm if the system alerts.
- **Clear:** Clear all event logs.



TIP:

Please plug-in any of the first four hard drives, then event logs can be saved and displayed in next system boot up. Otherwise, the event logs cannot be saved and would be disappeared.

Event Log Level to Show

<< first < prev **1** 2 3 4 5 6 7 8 9 10 next > last >>

| Type | Time | Content |
|-------------|---------------------------|-------------------------------------------------------|
| Information | Mon, 17 Feb 2014 18:35:56 | [CTR1] Disk 1 has been freed from RAID group 'R5'. |
| Information | Mon, 17 Feb 2014 18:35:56 | [CTR1] Virtual disk 'VD-02' has been deleted. |
| Information | Mon, 17 Feb 2014 18:35:56 | [CTR1] Virtual disk 'SnapVD-01' has been deleted. |
| Information | Mon, 17 Feb 2014 18:35:56 | [CTR1] Virtual disk 'VD-01' has been deleted. |
| Information | Mon, 17 Feb 2014 18:35:56 | [CTR1] RAID group 'R5' has been deleted. |
| Information | Mon, 17 Feb 2014 18:35:42 | [CTR1] LUN 1 is attached to virtual disk 'VD-01'. |
| Information | Mon, 17 Feb 2014 18:35:34 | [CTR1] Disk 2 has been freed from RAID group 'R5'. |
| Error | Mon, 17 Feb 2014 18:35:34 | [CTR1] Virtual disk 'VD-02' has failed. |
| Error | Mon, 17 Feb 2014 18:35:34 | [CTR1] Virtual disk 'VD-01' has failed. |
| Error | Mon, 17 Feb 2014 18:35:34 | [CTR1] RAID group 'R5' has failed. |
| Information | Mon, 17 Feb 2014 18:35:26 | [CTR1] Disk 3 has been freed from RAID group 'R5'. |
| Warning | Mon, 17 Feb 2014 18:35:26 | [CTR1] RAID group 'R5' is in degraded mode. |
| Information | Mon, 17 Feb 2014 18:23:47 | [CTR1] admin login from 192.168.8.231 via web UI. |
| Information | Sat, 15 Feb 2014 20:54:24 | [CTR1] admin login from 92.242.203.131 via web UI. |
| Information | Fri, 14 Feb 2014 15:42:28 | [CTR1] admin login from 59.125.120.109 via web UI. |
| Information | Fri, 14 Feb 2014 15:01:17 | [CTR1] admin login from 203.117.200.77 via web UI. |
| Information | Thu, 13 Feb 2014 11:46:00 | [CTR1] admin login from 192.168.135.1 via web UI. |
| Information | Wed, 12 Feb 2014 21:57:00 | [CTR1] Virtual disk 'VD-02' has completed rebuilding. |
| Information | Wed, 12 Feb 2014 21:42:25 | [CTR1] Virtual disk 'VD-02' has started rebuilding. |
| Information | Wed, 12 Feb 2014 21:42:25 | [CTR1] Virtual disk 'VD-01' has completed rebuilding. |

<< first < prev **1** 2 3 4 5 6 7 8 9 10 next > last >>

The event logs are displayed in reverse order which means the latest event log is on the first / top page. They are actually saved in the first four hard drives; each hard drive has one copy of event log. For one system, there are four copies of event logs to make sure users can check event log any time when there are failed disks.

Upgrade

The **Upgrade** tab is used to upgrade controller firmware, JBOD firmware, change operation mode, and active SSD caching license. Before upgrade, it recommends to use **Configuration Backup** tab to export all configurations to a file.

| | |
|--------------------------------------------------|--------------------------------------------------------------------|
| Controller Module Firmware Update | |
| Select the firmware file for the upgrade: | <input type="text"/> <input type="button" value="Browse..."/> |
| <input type="button" value="Apply"/> | |
| JBOD Firmware Update | |
| Choose an JBOD: | <input type="text"/> <input type="button" value="v"/> |
| Select the firmware file for the upgrade: | <input type="text"/> <input type="button" value="Browse..."/> |
| <input type="button" value="Apply"/> | |
| Controller Mode | |
| Operation Mode: | <input type="text" value="Dual"/> <input type="button" value="v"/> |
| <input type="button" value="Apply"/> | |
| SSD Caching License | |
| Select the license file to activate SSD Caching: | <input type="text"/> <input type="button" value="Browse..."/> |
| <input type="button" value="Apply"/> | |


The options are available on this tab:

- **Controller Module Firmware Update:** Please prepare new controller firmware file named “xxx.bin” in local hard drive, then click **Browse** to select the firmware file. Click **Apply** button, it will pop up a warning message, click **OK** button to start upgrading the firmware. When upgrading, there is a progress bar running. After finished upgrading, the system must reboot manually to make the new firmware take effect.
- **JBOD Firmware Update:** To upgrade JBOD firmware, choose a JBOD first, the other steps are the same as controller firmware update.
- **Controller Mode:** This option can be modified to dual or single here. If the system installed only one controller, switch this mode to **Single**, and then click **Apply** button.
- **SSD Caching License:** This option can activate SSD caching function. Select the license file, and then click **Apply** button. Each license key is unique and dedicated to a specific system. To obtain the license key, please contact sales for assistance.


Firmware Synchronization (Only available in Dual controller models)

The **Firmware Synchronization** tab is used on dual controller systems to synchronize the controller firmware versions when the firmware of the master controller and the slave controller are different. The firmware of slave controller is always changed to match the firmware of the master

controller. It doesn't matter if the firmware version of slave controller is newer or older than that of the master. Normally, the firmware versions in both controllers are the same.

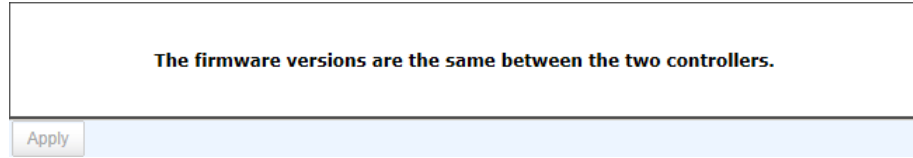


If the firmware versions between two controllers are different, it will display the following message. Click **Apply** button to synchronize.

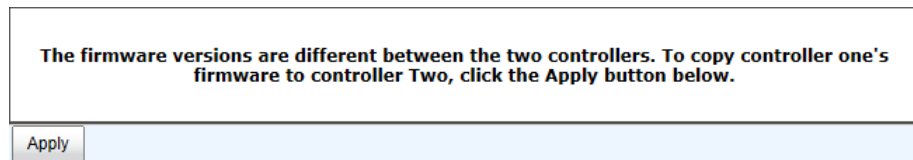

TIP: This tab is only visible when the dual controllers are installed. A single controller system does not have this option.

Reset to Factory Defaults

The **Reset to factory defaults** tab allows users to reset the system configurations back to the factory default settings.

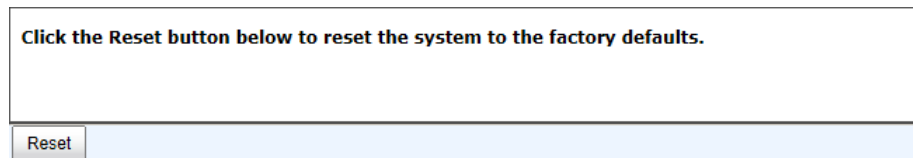

The default values are:

- Management IP Address: 192.168.1.234
- User Name: admin
- Password: 00000000

Configuration Backup

The **Configuration Backup** is used to either save system configuration (export) or apply a saved configuration (import).

| | |
|--------------------------------------|-----------------------------------------------------------------------------|
| Import or Export: | <input type="button" value="Import"/> <input type="button" value="Export"/> |
| Import File: | <input type="text"/> <input type="button" value="Browse..."/> |
| <input type="button" value="Apply"/> | |

While the volume configuration settings are available for exporting, to prevent conflicts and overwriting existing data, they cannot be imported.

The options are available on this tab:

- **Import:** Import all system configurations excluding volume configuration.
- **Export:** Export all configurations to a file.



CAUTION:

Import option will import all system configurations excluding volume configuration and the current system configurations will be replaced.

Volume Restoration

The **Volume Restoration** can restore the volume configuration from the volume creation history. It is used for RAID group corrupt and tries to recreate the volume. When trying to do data recovery, the same volume configurations as original must be set and all member disks must be installed by the same sequence as original. Otherwise, data recovery will fail. The volume restoration does not guarantee that the lost data can be restored. Please get help from the expert before executing the function.

Restore the Volume Configuration

The volume restoration can restore your previous volume configurations when a RAID group corruption or a mis-delete occurs. Before restoration, please make sure that all the member disks are in guarantee all the lost data will be recovered. Please contact for support before using this function.

<< first < prev 1 2 3 4 5 6 7 8 next > last >>

| | RAID Group Name | RAID | Virtual Disk | Volume Size (GB) | Disks Used | Disk Slot | Time | Event Log |
|---------|-----------------|--------|--------------|------------------|------------|----------------|-------------------------|-------------------------------------------|
| ▼ | 1 | RAID 5 | 3 | 300 | 3 | Local: 1, 2, 3 | 2014/02/17 18:52:41 CST | The virtual disk is created. |
| Restore | | RAID 5 | 2 | 200 | 3 | Local: 1, 2, 3 | 2014/02/17 18:52:35 CST | The virtual disk is created. |
| ▼ | 1 | RAID 5 | 1 | 100 | 3 | Local: 1, 2, 3 | 2014/02/17 18:52:29 CST | The virtual disk is created. |
| ▼ | R5 | RAID 5 | VD-02 | 50 | 1 | Local: 1 | 2014/02/17 18:35:34 CST | Physical disk is removed from the system. |
| ▼ | R5 | RAID 5 | VD-01 | 30 | 1 | Local: 1 | 2014/02/17 18:35:34 CST | Physical disk is removed from the system. |
| ▼ | R5 | RAID 5 | VD-02 | 50 | 2 | Local: 1, 2 | 2014/02/17 18:35:26 CST | Physical disk is removed from the system. |
| ▼ | R5 | RAID 5 | VD-01 | 30 | 2 | Local: 1, 2 | 2014/02/17 18:35:26 CST | Physical disk is removed from the system. |
| ▼ | R5 | RAID 5 | VD-02 | 50 | 3 | Local: 1, 2, 3 | 2014/02/11 17:03:30 CST | The snapshot space has initialized. |
| ▼ | R5 | RAID 5 | VD-02 | 50 | 3 | Local: 1, 2, 3 | 2014/02/11 17:03:08 CST | The virtual disk is created. |
| ▼ | R5 | RAID 5 | VD-01 | 30 | 3 | Local: 1, 2, 3 | 2014/02/11 17:02:45 CST | The snapshot space has initialized. |
| ▼ | R5 | RAID 5 | VD-01 | 30 | 3 | Local: 1, 2, 3 | 2014/02/11 17:00:04 CST | The virtual disk is created. |
| ▼ | QUICK13645 | RAID 5 | QUICK21222 | 3725 | 3 | Local: 3, 2, 1 | 2014/02/11 14:46:51 CST | The virtual disk is created. |

<< first < prev 1 2 3 4 5 6 7 8 next > last >>

This table shows the column descriptions.

| Column Name | Description |
|------------------|------------------------------------------------------|
| RAID Group Name | The original RAID group name. |
| RAID | The original RAID level. |
| Virtual Disk | The original virtual disk name. |
| Volume Size (GB) | The original capacity of the virtual disk. |
| Disks Used | The original physical disk number of the RAID group. |
| Disk slot | The original physical disk locations. |
| Time | The last action time of the virtual disk. |
| Event Log | The last event of the virtual disk. |

The options are available on this tab:

- **Restore:** Restore the virtual disk of the RAID group.



TIP:

When trying to do data recovery, the same volume configurations as original must be set and all member disks must be installed by the same sequence as original. Otherwise, data recovery will fail.



CAUTION:


The data recovery does not guarantee that the lost data can be restored 100%. It depends on the real operation and the degree of physical damages on disks. Users will take their own risk to do these procedures.

Reboot and Shutdown

The **Reboot and Shutdown** function is used to reboot or shutdown the system. Before powering off the system, it is highly recommended to execute **Shutdown** function to flush the data from cache onto the physical disks. The step is important for data protection.




The Reboot function has three options; reboot both controllers, controller 1 only or controller 2 only.

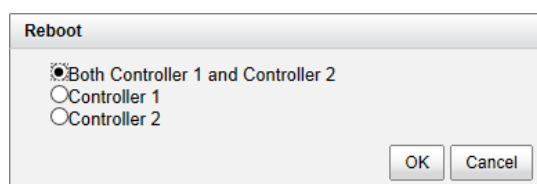


Performance Monitor

The **Performance Monitor** menu option is accessing the **Disk**, **iSCSI**, and **Fibre Channel** (This option is only visible when it is fibre channel model.) option tabs.




Disk

The **Disk** provides to display the throughput and latency of the physical disk. Check the slots which you want to monitor.

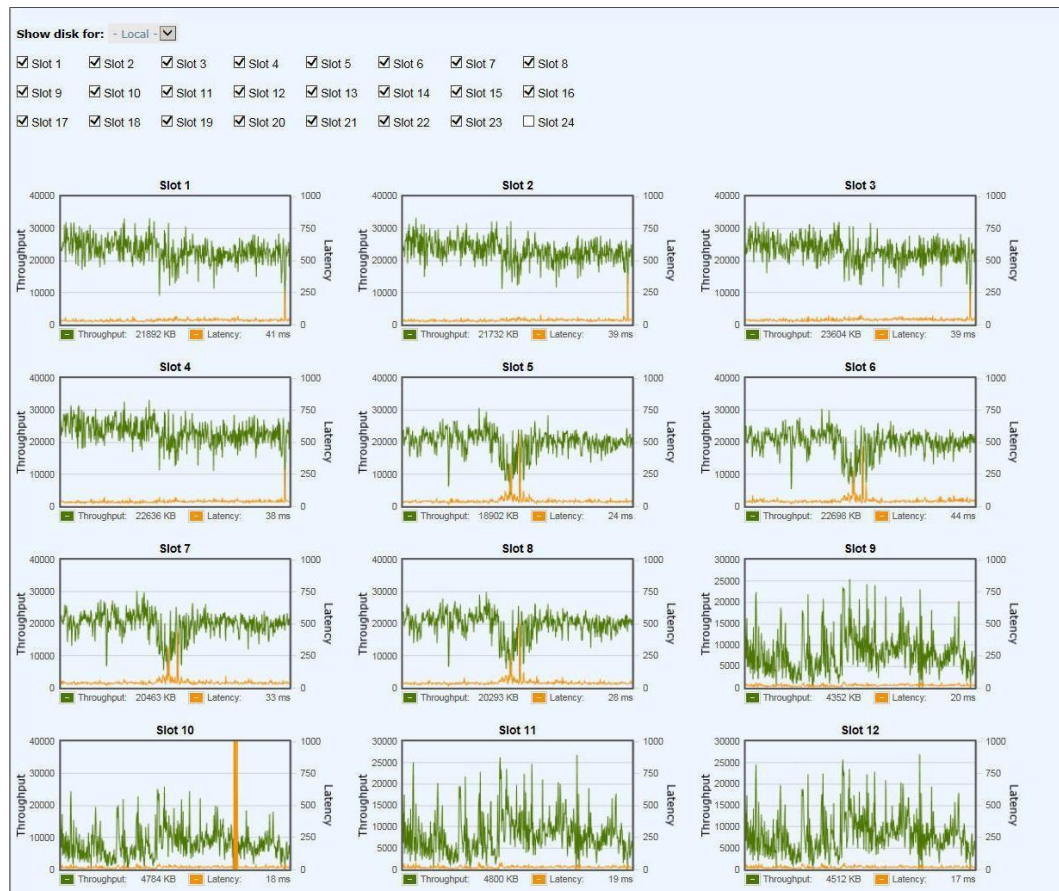

iSCSI

The **iSCSI** provides to display TX (Transmission) and RX (Reception) of the iSCSI ports. Check the interfaces which you want to monitor.

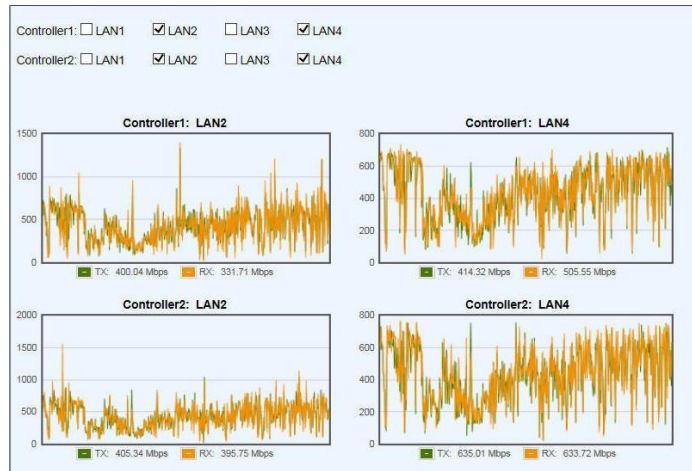

Fibre Channel

The **Fibre Channel** provides to display TX (Transmission) and RX (Reception) of the fibre channels. Check the interfaces which you want to monitor.

Advanced Operations

5

Volume Rebuild

If one physical disk of the RAID group which is set as protected RAID level (e.g.: RAID 5, or RAID 6) fails or has been removed, then the status of RAID group will be changed to degraded mode. At the same time, the system will search the spare disk to execute volume rebuild the degraded RAID group into complete one.

There are three types of spare disks which can be set in **Physical Disks**:

- **Dedicated Spare:** The hard drive has been set as dedicated spare of a RAID group.
- **Local Spare:** The hard drive has been set as local spare of the enclosure.
- **Global Spare:** The hard drive has been set as global spare of whole system.

The detection sequence is the dedicated spare disk as the rebuild disk first, then local spare disk and global spare disk.

The following examples are scenarios for a RAID 6.

1. When there is no global spare disk or dedicated spare disk in the system, The RAID group will be in degraded mode and wait until there is one disk assigned as spare disk, or the failed disk is removed and replaced with new clean disk, and then the Auto-Rebuild starts.
2. When there are spare disks for the degraded array, system starts Auto-Rebuild immediately. In RAID 6, if there is another disk failure occurs during rebuilding, system will start the above Auto-Rebuild process as well. Auto-Rebuild feature only works at that the status of RAID group is **Online**. Thus, it will not conflict with the online roaming feature.
3. In degraded mode, the health of the RAID group is **Degraded**. When rebuilding, the status of RAID group and virtual disk will display **Rebuilding**, the column **R%** in virtual disk will display the ratio in percentage. After complete rebuilding, the status will become **Online**.

**TIP:**


The dedicated spare cannot be set if there is no RAID group or only RAID groups with RAID 0 or JBOD level.

Sometimes, rebuild is called recover; they are the same meaning. This table describes the relationship between RAID levels and recovery.

| Operation | Description |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RAID 0 | Disk striping. No protection for data. RAID group fails if any hard drive fails or unplugs. |
| RAID 1 | Disk mirroring over 2 disks. RAID 1 allows one hard drive fails or unplugging. Need one new hard drive to insert to the system and rebuild to be completed. |
| N-way mirror | Extension to RAID 1 level. It has N copies of the disk. N-way mirror allows N-1 hard drives failure or unplugging. |
| RAID 3 | Striping with parity on the dedicated disk. RAID 3 allows one hard drive failure or unplugging. |
| RAID 5 | Striping with interspersed parity over the member disks. RAID 5 allows one hard drive failure or unplugging. |
| RAID 6 | 2-dimensional parity protection over the member disks. RAID 6 allows two hard drives failure or unplugging. If it needs to rebuild two hard drives at the same time, it will rebuild the first one, then the other in sequence. |
| RAID 0+1 | Mirroring of RAID 0 volumes. RAID 0+1 allows two hard drive failures or unplugging, but at the same array. |
| RAID 10 | Striping over the member of RAID 1 volumes. RAID 10 allows two hard drive failure or unplugging, but in different arrays. |
| RAID 30 | Striping over the member of RAID 3 volumes. RAID 30 allows two hard drive failure or unplugging, but in different arrays. |
| RAID 50 | Striping over the member of RAID 5 volumes. RAID 50 allows two hard drive failures or unplugging, but in different arrays. |
| RAID 60 | Striping over the member of RAID 6 volumes. RAID 60 allows four hard drive failures or unplugging, every two in different arrays. |
| JBOD | The abbreviation of "Just a Bunch Of Disks". No data protection. RG fails if any hard drive failures or unplugs. |

Migrate and Move RAID Groups

Migrate RAID Level function changes the RAID group to different RAID level or adds the member disks of the RAID group for larger capacity. Usually, the RAID group migrates to higher RAID level for better protection. To do migration, the total size of RAID group must be larger than or equal to the original RAID group. The limitation is that it's not allowed expanding the same RAID level with the same physical disks of the original RAID group. There is a similar function **Move RAID Level** which will move the member disks of the RAID group to totally different physical disks. In addition, thin provision RAID group cannot execute migrate or move, it uses **Add RAID Set** to enlarge capacity. Describe more detail in the Thin Provision section.

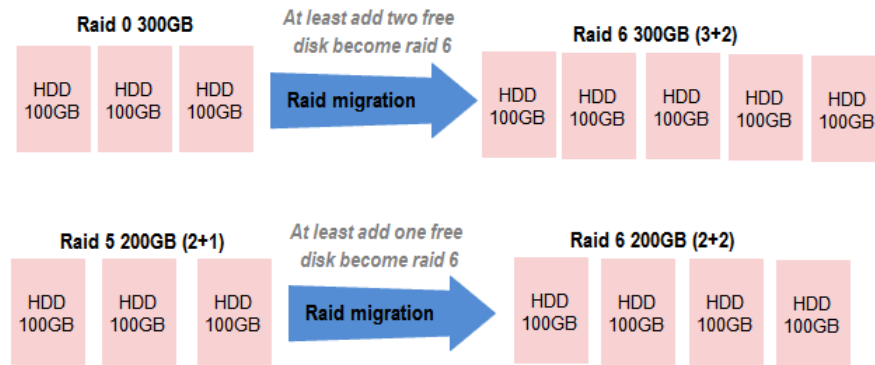

There are some limitations when a RAID group is being migrated or moved. System would reject these operations:

1. Add dedicated spare.
2. Remove a dedicated spare.
3. Create a new virtual disk.
4. Delete a virtual disk.
5. Extend a virtual disk.
6. Scrub a virtual disk.
7. Perform another migration operation.
8. Scrub entire RAID group.
9. Take a snapshot.
10. Delete a snapshot.
11. Expose a snapshot.
12. Rollback to a snapshot.



TIP:

Migrate function will migrate the member disks of RAID group to the same physical disks but it should increase the number of disks or it should be different RAID level. Move function will move the member disks of RAID group to totally different physical disks.



CAUTION:

RAID group migration or moving cannot be executed during rebuilding or virtual disk extension.

Take an example of migrate the RAID group.

1. Select **Volume Configuration -> RAID Groups**.
2. Select a RAID group, and then click ▼ -> **Migrate RAID Level**.
3. Select a **RAID Level** from the drop-down list.

- Click the **Select Disks** button to select disks from either local or expansion JBOD systems, and click **OK** to complete the selection. The selected disks are displayed at **Disks Used**.

Migrate RAID Level

RAID Name: R0->R5

RAID Level: RAID 5

Disks Used: Local: 1 2 3

- At the confirmation dialog, click **OK** button to execute migration.
- Migration starts. The status of **Physical Disks**, **RAID Groups** and **Virtual Disks** are changing. The complete percentage of migration is displayed in **R%**.

Show disk for: Local Show disk size in: GB

| Slot | Size (GB) | RAID Group | RAID Set | Status | Health | Usage | Vendor | Serial Number | Rate | Write Cache | Standby | Read-Ahead | Command Queuing |
|------|-----------|------------|----------|---------------|--------|-------|--------|-----------------|--------------|-------------|----------|------------|-----------------|
| 1 | 1862 | R0->R5 | N/A | Transitioning | Good | RAID | WDC | WD-WCAVY4158095 | SATA 6.0Gb/s | Disabled | Disabled | Enabled | Enabled |
| 2 | 1862 | R0->R5 | N/A | Transitioning | Good | RAID | WDC | WD-WCAVY3924333 | SATA 6.0Gb/s | Disabled | Disabled | Enabled | Enabled |
| 3 | 1862 | R0->R5 | N/A | Online | Good | RAID | WDC | WD-WCAVY4118479 | SATA 6.0Gb/s | Disabled | Disabled | Enabled | Enabled |

| Name | Total (GB) | Free Capacity (GB) | Available Size (GB) | Thin Provisioning | Disks Used | Number of Virtual Disk | Status | Health | RAID | Current Controller | Preferred Controller |
|--------|------------|--------------------|---------------------|-------------------|------------|------------------------|-----------|--------|--------|--------------------|----------------------|
| R0->R5 | 3725 | 3625 | 3625 | Disabled | 3 | 1 | Migrating | Good | RAID 5 | Controller 1 | Controller 1 |

Show disk size in: GB

<< first < prev 1 next > last >>

| Name | Size (GB) | Write | Priority | Bg Rate | Type | Clone | Schedule Clone | Status | Health | R % | RAID | LUN # | Snapshot Space (GB) | Snapshot # | RAID Group |
|-------|-----------|-------|----------|---------|------|-------|----------------|-----------|---------|-----|--------|-------|---------------------|------------|------------|
| VD-01 | 5 | WB | HI | 4 | RAID | N/A | N/A | Migrating | Optimal | 0 | RAID 5 | 0 | 0/0 | 0 | R0->R5 |

<< first < prev 1 next > last >>

Move RAID Level usage is the same as **Migrate RAID Level** except it cannot change the RAID level.

Extend Virtual Disks

Extend function extend the size of the virtual disk if there is enough free space.

Take an example of extending the virtual disk.

- Select **Volume Configuration -> Virtual Disks**.
- Select a virtual disk, and then click **▼ -> Extend**.

3. Change the virtual disk size. The size must be larger than the current, and then click **OK** button to start extension.

Extend

Enter the size that you would like to extend this virtual disk to and press OK. The size must be larger than the current size of the virtual disk.

Virtual Disk Size: GB

Free Space: 3720 GB

4. Extension starts. If the virtual disk needs initialization, it will display the status **Initiating** and the complete percentage of initialization in **R%**.



TIP:

The extension size must be larger than the current size of the virtual disk.




CAUTION:


Extension cannot be executed during rebuilding or migration.

QThin

Nowadays thin provisioning is a hot topic people talk about in IT management and storage industry. To make contrast to thin provisioning, it naturally brings to our minds with the opposite term - fat provisioning, which is the traditional way IT administrators allocate storage space to each logical volume that is used by an application or a group of users. When it comes to the point to decide how much space a logical volume requires for three years or for the lifetime of an application, it's really hard to make the prediction correctly and precisely. To avoid the complexity of adding more space to the volumes frequently, IT administrators might as well allocate more storage space to each logical volume than it needs in the beginning. This is why it's called "fat" provisioning. Usually it turns out that a lot of free space is sitting around idle. This stranded capacity is wasted, which equals to waste of investment and inefficiency. Various studies indicate that as much as 75% of the storage capacity in small and medium enterprises or large data centers is allocated but unused. And this is where thin provisioning kicks in.

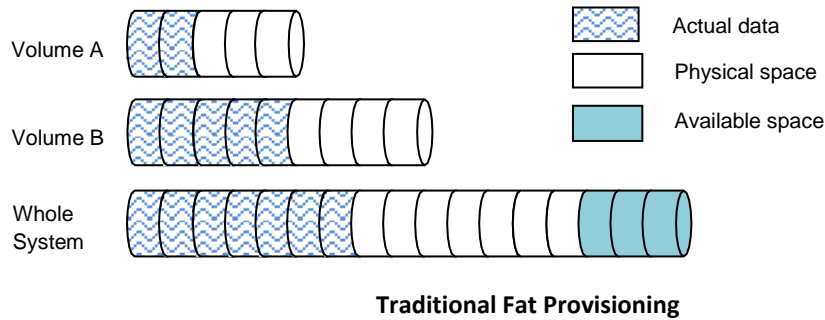

Thin provisioning sometimes is known as just-in-time capacity or over allocation. As the term explains itself, it provides storage space by requests dynamically. Thin provisioning presents more storage space to the hosts or servers connecting to the storage system than is actually available on the storage system. Put it in another way, thin provisioning allocates storage space that may or may not exist. The whole idea is actually another way of virtualization. Virtualization is always about a logical pool of physical assets and provides better utilization over those assets. Here the virtualization mechanism behind thin provisioning is storage pool. The capacity of the storage pool is shared by all volumes. When write requests come in, the space will be drawn dynamically from this storage pool to meet the needs.

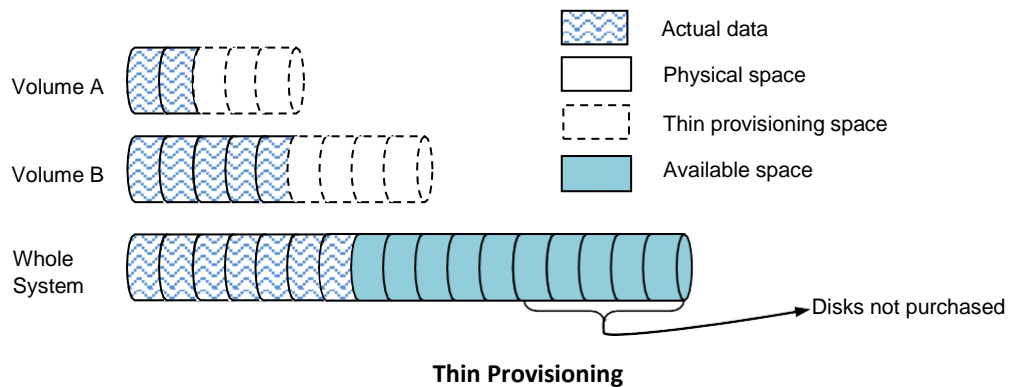

The Benefits of QThin

The benefits of QThin are described on the following.

- Less disk purchase is needed initially when setting up a new storage system. You don't need to buy more capacity to meet your future data growth at present time. Usually hard drive price declines as time progresses. You can buy the same hard drives with cheaper price at a later time. Why not save money upfront while you can?
- No stranded storage capacity, better utilization efficiency and lower total cost of ownership. QThin can make full use of the stranded capacity that traditional provisioning can't. All free capacity can be made available to other hosts. A single storage system can serve more hosts and servers to achieve high consolidation ratio. QThin can help you achieve the same level of

services with less hard drives purchased upfront, which can significantly reduce your total cost of ownership.

- Scalability: storage pool can grow on demand.

When the storage pool (RAID group) has reached the threshold you set before. Up to 32 RAID sets can be added to the RAID group to increase the capacity on demand without interrupting I/O. Each RAID set can have up to 64 physical disks.
- Automatic space reclamation mechanism to recycle unused blocks.

The technology used here is called zero reclamation. When a thin RAID group is created, the initialization process will try to fill out all the storage pool space with zero. This process will run in background with low priority in order not to impact the I/O performance. This is the reason why when there is no I/O traffic from the hosts, the hard drive LED will keep blinking as if there are I/O activities. The purpose of zero reclamation is that when the actual user data happens to have all zero in a basic allocation unit (granularity), the storage system will treat it as free space and recycle it. Until the next time there is data update to this reclaimed all zero basic unit, the storage system can swiftly return a basic unit from the free storage pool because it's already filled with zero.
- An eco-friendly green feature that helps to reduce energy consumption.

Hard drive is the top power consumer in a storage system. Because you can use less hard drives to achieve the same amount of work, this translates directly to a huge reduction of power consumption and more green in your pocket.

Features Highlight

The following describes the comparison with Fat and Thin provisioning.

- Write on demand or allocate on demand.

This is the most distinctive function in thin provisioning. You can see from the screenshots below. Figure 1 shows there are two RAID groups created. "Fat-RG" is using traditional provisioning without QThin enabled and its size is 1862GB. "Thin-RG" is QThin-enabled and its size is the same.

| | Name | Total (GB) | Free Capacity (GB) | Available Size (GB) | Thin Provisioning |
|---|---------|------------|--------------------|---------------------|-------------------|
| ▼ | Fat-RG | 1862 | 1862 | 1862 | Disabled |
| ▼ | Thin-RG | 1862 | 1862 | 1862 | Enabled |

Figure 1: No virtual disk is created

Let's create a Virtual Disk on each RAID group with the same size of 1000GB respectively in Figure 2 and see what happen.

| | Name | Size (GB) | Write | Priority | Bg Rate | Type | Clone |
|---|---------|-----------|-------|----------|---------|------|-------|
| ▼ | Fat-VD | 1000 | WB | HI | 4 | RAID | N/A |
| ▼ | Thin-VD | 1000 | WB | HI | 4 | RAID | N/A |

Figure 2: Virtual disks are created

In Figure 3, the free space of "Fat-RG" immediately reduces to 862GB. 1000GB is taken away by the virtual disk. However, the free space of "Thin-RG" is still 1862GB even though the same size of virtual disk is created from the RAID group. Nothing is written to the virtual disk yet, so no space is allocated. The remaining 1862GB can be used to create other virtual disks. This is storage efficiency.

| | Name | Total (GB) | Free Capacity (GB) | Available Size (GB) | Thin Provisioning |
|---|---------|------------|--------------------|---------------------|-------------------|
| ▼ | Fat-RG | 1862 | 862 | 862 | Disabled |
| ▼ | Thin-RG | 1862 | 1862 | 1862 | Enabled |

Figure 3: Write on demand

- Expand capacity on demand without downtime.
Extra RAID set can be added to the thin RAID group to increase the size of free storage pool. A thin RAID group can have up to 32 RAID sets with each RAID set containing up to 64 physical hard drives. The maximum size of each RAID set is 64TB. Figure 4 shows that "Thin-RG" consists of two RAID sets.

Show RAID size in:

| | Name | Total (GB) | Free Capacity (GB) | Available Size (GB) | Thin Provisioning | Disks Used |
|---|---------|------------|--------------------|---------------------|-------------------|------------|
| ▼ | Fat-RG | 1862 | 862 | 862 | Disabled | 1 |
| ▼ | Thin-RG | 3724 | 3724 | 3724 | Enabled | 2 |

RAID Set:

| | No | Total Size (GB) | Free Size (GB) | Disks Used | RAID Cell | Status | Health |
|---|----|-----------------|----------------|------------|-----------|--------|--------|
| ▼ | 1 | 1862 | 1862 | 1 | 1 | Online | Good |
| ▼ | 2 | 1862 | 1862 | 1 | 1 | Online | Good |

Figure 4: Scalable RAID group size

- Allocation unit (granularity) is 1GB. This is a number that demands careful balance between efficiency and performance. The smaller it is, the better the efficiency and the worse the performance becomes, and vice versa.
- Thin provisioned snapshot space and it is writable.
Snapshot space sits at the same RAID group of the volume that the snapshot is taken against. Therefore when you expose the snapshot into a virtual disk, it becomes a thin-provisioned

virtual disk. It will only take up the just the right amount of space to store the data, not the full size of the virtual disk.

- Convert traditional virtual disk to QThin and vice versa.

You can enjoy the benefits of QThin right now and right this moment. Move all your existing fat-provisioned virtual disks to thin-provisioned ones. Virtual disk clone function can be performed on both directions - fat-to-thin and thin-to-fat, depending on your application needs. Figure 5 shows cloning a fat virtual disk to a thin one.

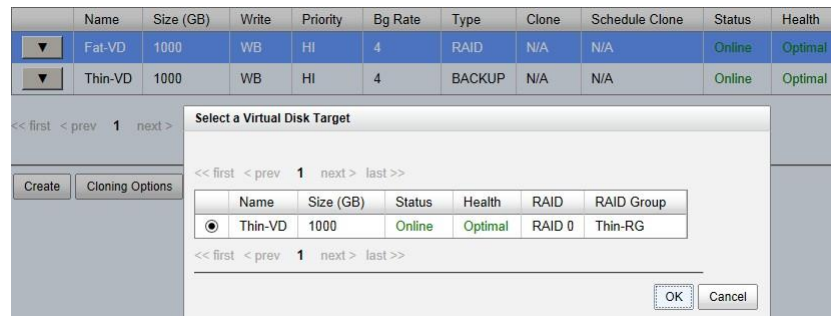


Figure 5: Clone between thin virtual disk and fat one

QThin Options

The following describes the thin provisioning options.

- Threshold settings and capacity policies.

These are designed to simplify the management and better monitoring the storage usage. You can set as many as 16 policies for each RAID group. When space usage ratio grows over the threshold set in the policy, the action will be taken and event log will be generated.

| | Name | Total (GB) | Free Capacity (GB) | Available Size (GB) | Thin Provisioning | Disks Used |
|---|---------|------------|--------------------|---------------------|-------------------|------------|
| ▼ | Fat-RG | 1862 | 360 | 360 | Disabled | 1 |
| ▼ | Thin-RG | 3724 | 3722 | 3724 | Enabled | 2 |

RAID Set:

| | No | Total Size (GB) | Free Size (GB) | Disks Used | RAID Cell | Status | Health |
|---|----|-----------------|----------------|------------|-----------|--------|--------|
| ▼ | 1 | 1862 | 1862 | 1 | 1 | Online | Good |
| ▼ | 2 | 1862 | 1860 | 1 | 1 | Online | Good |

RAID Group Policy:

<< first < prev 1 next > last >>

| | No | Threshold | Level | Action |
|---|----|-----------|-------------|------------------------|
| ▼ | 1 | 60% | Information | Take no Action |
| ▼ | 2 | 70% | Information | Take no Action |
| ▼ | 3 | 80% | Information | Take no Action |
| ▼ | 4 | 85% | Warning | Reclaim Space |
| ▼ | 5 | 90% | Warning | Delete Snapshots |
| ▼ | 6 | 95% | Warning | De-activate RAID Group |

Figure 6: Capacity policy settings

- Automatic space reclamation to recycle unused space and increase utilization rate. Automatic space reclamation will be automatically activated in RAID group initialization process or it can be set manually through capacity policy. You can set as many as 16 policies. When space usage ratio grows over the threshold set in the policy, space reclamation will be enabled automatically at the background with the lowest priority or when the I/O is low. The resource impact is reduced to minimum.

Modify RAID Group Policy

Level: Information ▼

Action:

Take no Action

Reclaim Space

Delete Snapshots

De-activate RAID Group

OK Cancel

Figure 7: Space reclamation

Thin Provisioning Case

We suggest that you apply QThin to non-critical production applications first. Thin provisioning works well when the data written is thin-friendly, which means that the data written is not completely spread across the whole volume. Applications that spread metadata across the entire volume will obviate the advantages of thin provisioning. Some applications that expect the data to be contiguous at block level are not good candidates for thin provisioning as well.

QThin works well with email system, web-based archive, or regular file archive system. When the number of supported volumes grows larger, the benefits of QThin will become more apparent.

Disk Roaming

Physical disks can be re-sequenced in the same system or move all physical disks in the same RAID group from system-1 to system-2. This is called disk roaming. System can execute disk roaming online. Please follow the procedures.

1. In **Volume Configuration -> RAID Group** tab, selects a RAID group. And then click ▼ -> **Deactivate**.
2. Click **OK** button to apply. The **Status** changes to **Offline**.
3. Move all physical disks of the RAID group to another system.
4. In **Volume Configuration -> RAID Group** tab, selects the RAID group. And then click ▼ -> **Activate**.
5. Click **OK** to apply. The **Status** changes to **Online**.

Disk roaming has some constraints as described in the followings:

1. Check the firmware version of two systems first. It is better that either systems have the same firmware version or the firmware version of the system-2 is newer.
2. All physical disks of the RAID group should be moved from system-1 to system-2 together. The configuration of both RAID group and virtual disk will be kept but LUN configuration will be cleared in order to avoid conflict with the current setting of the system-2.

JBOD Expansion

JetStor storage space can be expanded by adding JBOD expansion system.

Connecting JBOD

JetStor storage systems support expansion systems with SAS connections. When connecting to an expansion system, it will be displayed at the **Show disk for:** drop-down list in **Volume Configuration -> Physical Disks** tab. For example: Local, JBOD 1, JBOD 2 ...etc. Local means disks in local controller, JOBD 1 means disks in JBOD 1 controller, and so on.

In **Enclosure Management -> Hardware monitor** tab, select the enclosure at the **Show information for:** drop-down list, it can display the hardware status of SAS JBODs.

In **Enclosure Management** -> **S.M.A.R.T.** tab, select the enclosure at the Show **information for:** drop-down list, it can display the SMART information of the disks in JBODs.

SAS JBOD expansion has some constraints as described in the followings:

1. User could create RAID group among multiple chassis, max number of disks in a single RAID group is 32.
2. Local spare disk can support the RAID groups which located in the local chassis.
3. Global spare disk can support all RAID groups which located in the different chassis.
4. When support SATA drives for the redundant JBOD model, the 6G MUX board is required. The 3G MUX board does not apply to this model.
5. The following table is the maximum JBOD numbers and maximum HDD numbers with different chassis can be cascaded.


724HS(D) 10G V2 / 724IF(D) V2:

| RAID Storage System | |
|---------------------|-----|
| 24 bay JBOD. | 9 |
| Max HDD no. | 240 |

Upgrade Firmware

Before upgrade, it recommends to use **System maintenance -> Configuration Backup tab** to export all configurations to a file. To upgrade the firmware of JBOD, please follow the procedures.

1. In **System Maintenance -> Upgrade** tab, select a JBOD first, and then click **Browse** to select the firmware file.

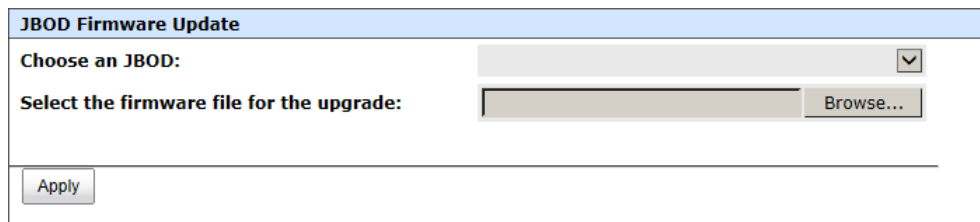


2. Click **Apply** button, it will pop up a warning message, click **OK** button to start upgrading the JBOD firmware.
3. After finished upgrading, the JBOD system must reboot manually to make the new firmware took effect.

MPIO and MC/S

These features come from iSCSI initiator. They can be setup from iSCSI initiator to establish redundant paths for sending I/O from the initiator to the target.


MPIO

In Microsoft Windows server base system, Microsoft MPIO driver allows initiators to login multiple sessions to the same target and aggregate the duplicate devices into a single device. Each session to the target can be established using different NICs, network infrastructure and target ports. If one session fails, then another session can continue processing I/O without interruption to the application.

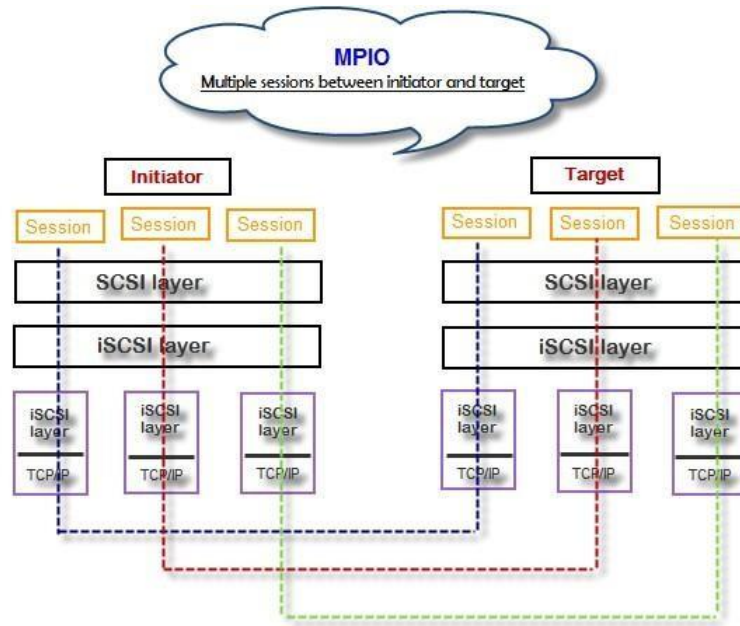

MC/S

MC/S (Multiple Connections per Session) is a feature of iSCSI protocol, which allows combining several connections inside a single session for performance and failover purposes. In this way, I/O can be sent on any TCP/IP connection to the target. If one connection fails, another connection can continue processing I/O without interruption to the application.

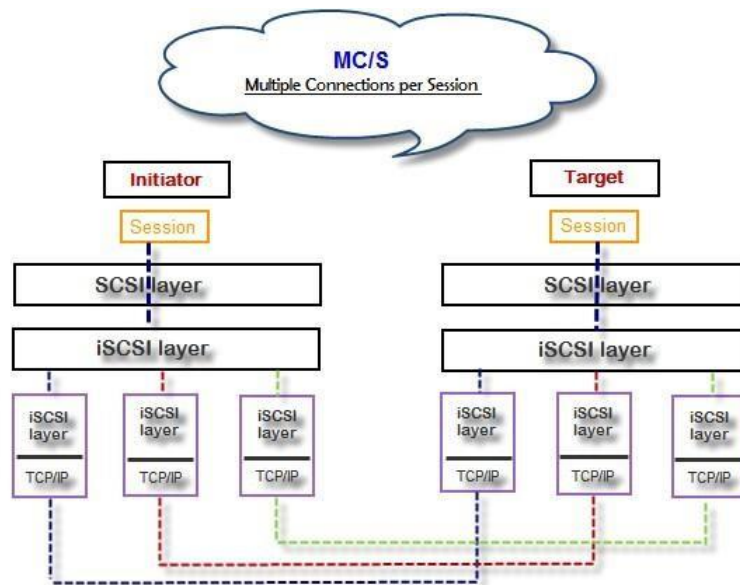

Difference

MC/S is implemented on iSCSI level, while MPIO is implemented on the higher level. Hence, all MPIO infrastructures are shared among all SCSI transports, including Fiber Channel, SAS, etc. MPIO is the most common usage across all OS vendors. The primary difference between these two is which level the redundancy is maintained. MPIO creates multiple iSCSI sessions with the target storage. Load balance and failover occurs between the multiple sessions. MC/S creates multiple connections within a single iSCSI session to manage load balance and failover. Notice that iSCSI connections and sessions are different than TCP/IP connections and sessions. The above figures describe the difference between MPIO and MC/S.

There are some considerations when user chooses MC/S or MPIO for multi-path.

1. If user uses hardware iSCSI off-load HBA, then MPIO is the only one choice.
2. If user needs to specify different load balance policies for different LUNs, then MPIO should be used.
3. If user installs anyone of Windows XP, Windows Vista or Windows 7, MC/S is the only option since Microsoft MPIO is supported Windows Server editions only.
4. MC/S can provide higher throughput than MPIO in Windows system, but it consumes more CPU resources than MPIO.

Trunking and LACP


Link aggregation is the technique of taking several distinct Ethernet links to let them appear as a single link. It has a larger bandwidth and provides the fault tolerance ability. Beside the advantage of wide bandwidth, the I/O traffic remains operating until all physical links fail. If any link is restored, it will be added to the link group automatically.

LACP

The Link Aggregation Control Protocol (LACP) is a part of IEEE specification 802.3ad. It allows bundling several physical ports together to form a single logical channel. A network switch negotiates an automatic bundle by sending LACP packets to the peer. Theoretically, LACP port can be defined as active or passive. JetStor controller implements it as active mode which means that LACP port sends LACP protocol packets automatically. Please notice that using the same configurations between JetStor controller and gigabit switch.

The usage occasion of LACP:

- It's necessary to use LACP in a network environment of multiple switches. When adding new devices, LACP will separate the traffic to each path dynamically.

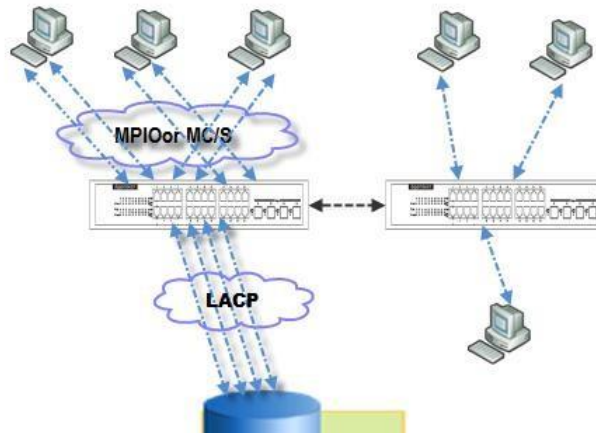


Trunking

Trunking is not a standard protocol. It defines the usage of multiple iSCSI data ports in parallel to increase the link speed beyond the limits of any single port.

The usage occasion of Trunking:

- This is a simple SAN environment. There is only one switch to connect the server and storage. And there is no extra server to be added in the future.
- There is no idea of using LACP or Trunking, uses Trunking first.

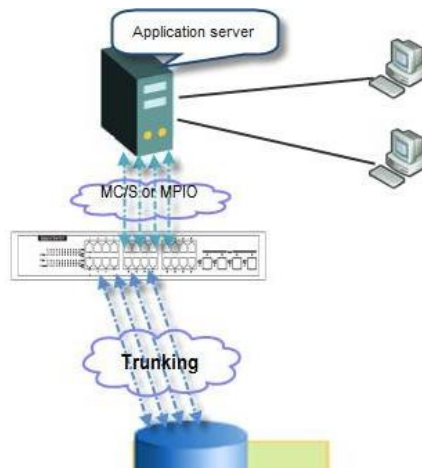

- There is a request of monitoring the traffic on a trunk in switch.



CAUTION:

Before using trunking or LACP, the gigabit switch must support either trunking or LACP. Otherwise, host cannot connect the link with storage device.

Dual Controllers

The JetStor storage system supports dual controllers of the same type for redundancy. Controller 1 (CTRL 1) is the master controller and controller 2 (CTRL 2) is the slave by default.




CAUTION:

- If you try to increase the system memory and running in dual controller mode, please make sure both controllers have the same DIMM on each corresponding memory slot. Failing to do so will result in controller malfunction, which will not be covered by warranty.
- Be aware that when the LED of the Controller Health is in RED, please DO NOT unplug the controller from the system or turn off the power suddenly. This may cause unrecoverable damage, which will not be covered by warranty.

Perform I/O


Please refer to the following topology and have all the connections ready. To perform I/O on dual controllers, server/host should setup MPIO. MPIO policy will keep I/O running and prevent fail connection with single controller failure. Example:

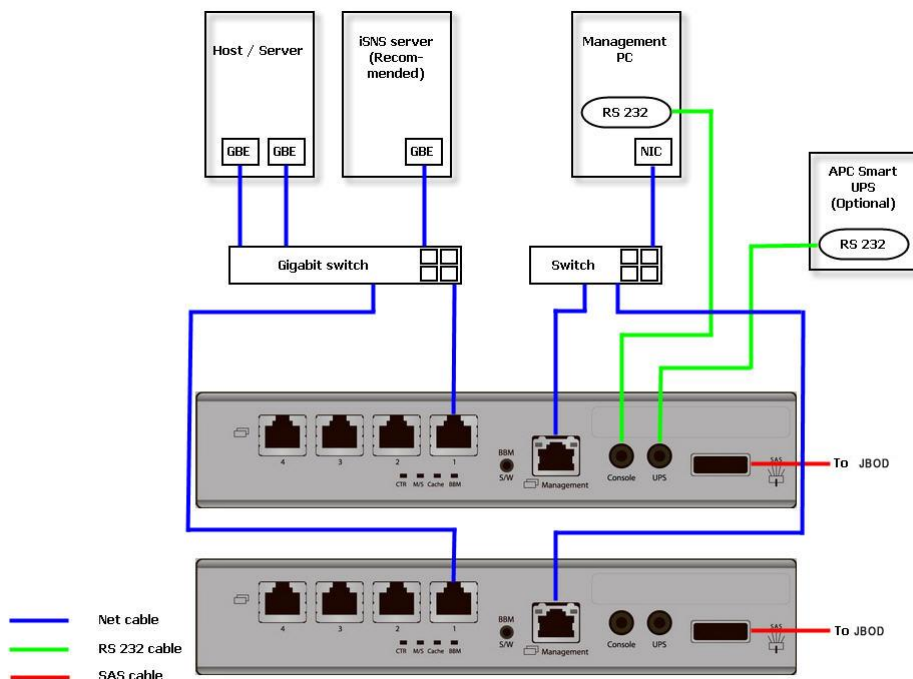

Ownership

When creating a RAID group, it will be assigned with a preferred owner, the default owner is controller 1. To change the ownership of the RAID group, please follow the procedures.

1. In **Volume Configuration -> RAID Group** tab, selects a RAID group. And then click ▼ -> **Change Preferred Controller**.

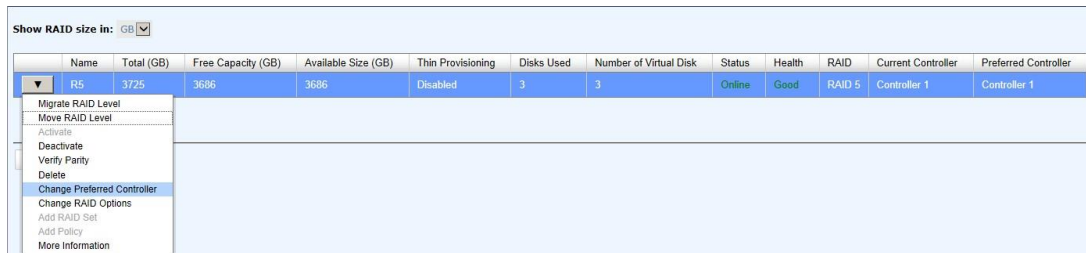

2. Click **OK** to apply. The ownership of the RG will be switched to the other controller.

Controller Status


There are four statuses in dual controller. It is displayed at **Status** column in **System Maintenance -> System Information**. Describe on the following.

1. **Normal:** Dual controller mode. Both of controllers are functional.
2. **Degraded:** Dual controller mode. When one controller fails or has been plugged out, the system will turn to degraded. In this stage, I/O will force to write through for protecting data and the ownership of RAID group will switch to good one. For example: if controller 1 which owns the RAID group 1 fails accidentally, the ownership of RAID group 1 will be switched to controller 2 automatically. And the system and data can keep working well. After controller 1 is fixed or replaced, the current owner of all RAID groups will be assigned back to their preferred owner.
3. **Lockdown:** Dual controller mode. The firmware of two controllers is different or the size of memory of two controllers is different. In this stage, only master controller can work and I/O will force to write through for protecting data.
4. **Single:** Single controller mode. In the stage, the controller must stay in slot A and MUX boards for SATA drives are not necessary. The differences between single and degraded are described on the following. There is no error message for inserted one controller only. I/O will not force to write through. And there is no ownership of RAID group.

Change Controller Mode

The operation mode can be changed from Single to Dual or vice versa. Please follow the procedures to change the operation mode.

1. In **System Maintenance** -> **Upgrade** tab, select **Single** or **Dual** in the drop-down list.

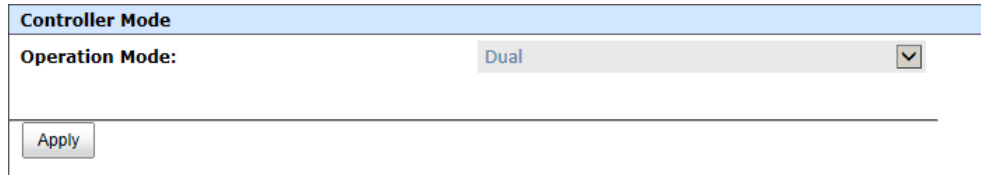

2. Click **Apply** button, it will pop up a warning message, click **OK** button to confirm.

Recommend iSNS Server

In addition, iSNS server is recommended. It's important for keeping I/O running smoothly when the ownership of the RAID group is switching or one of the dual controllers fails. For example of without iSNS server, when the controller 1 fails, the running I/O from host to controller 1 may fail because the host switches to new portal is slower at the moment and it may cause I/O time out. With iSNS server, this case would not happen.




TIP:
iSNS server is recommended for dual controller system of iSCSI interfaces.

Snapshots

Snapshot-on-the-box captures the instant state of data in the target volume in a logical sense. The underlying logic is Copy-on-Write, moving out the data which would be written to certain location where a write action occurs since the time of data capture. The certain location, named as "Snapshot virtual disk", is essentially a new virtual disk which can be attached to a LUN provisioned to a host as a disk like other ordinary virtual disks in the system.

Rollback restores the data back to the state of any time which was previously captured in case for any unfortunate reason it might be (e.g. virus attack, data corruption, human errors and so on). Snapshot virtual disk is allocated within the same RAID group in which the snapshot is taken, we suggest to reserve 20% of the RAID group size or more for snapshot space. Please refer to the following figure for snapshot concept.

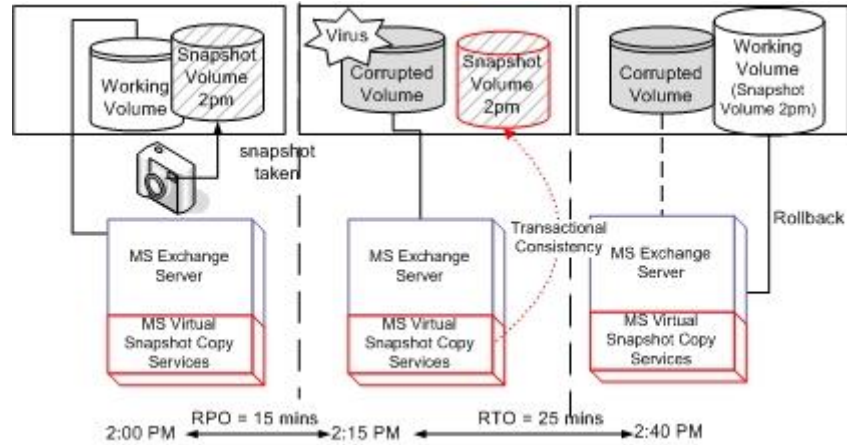

Take a Snapshot

Take an example of taking a snapshot.

1. Before taking a snapshot, it must reserve some storage space for saving variant data. There are two methods to set snapshot space. In **Virtual Disks** tab, selects a virtual disk. And then click ▼-> **Set Snapshot Space** or in **Snapshots** tab, click **Set Snapshot Space** button.


Set Snapshot Space

Virtual Disk: VD-01 ▼


Size: 30 GB ▼ **Available: 3595GB**
Minimum: 4GB

Free Capacity: 3565GB


2. Enter a **Size** which is reserved for the snapshot space, and then click **OK** button. The minimum size is suggested to be 20% of the virtual disk size. Now there are two numbers in **Snapshot Space (GB)** column in **Virtual Disks** tab. They mean used snapshot space and total snapshot space.
3. There are two methods to take snapshot. In **Virtual Disks** tab, selects a virtual disk. And then click ▼-> **Take a Snapshot** or in **Snapshots** tab, click **Take a Snapshot** button.
4. Enter a **Snapshot Name**.
5. Click **OK** button. The snapshot is taken.

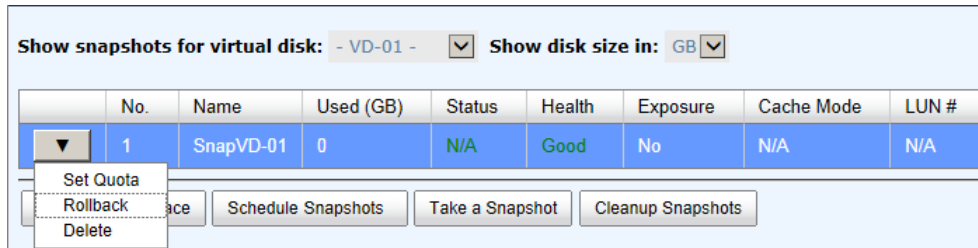

- Set quota to expose the snapshot. Click ▼ -> **Set Quota** option.

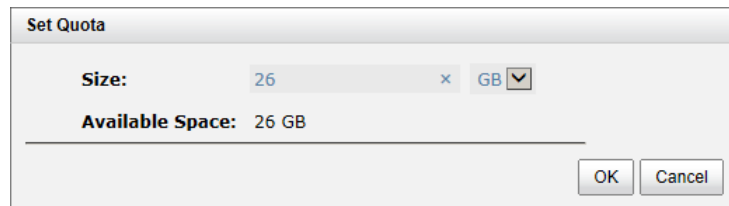

- Enter a size which is reserved for the snapshot. If the size is zero, the exposed snapshot will be read only. Otherwise, the exposed snapshot can be read / written, and the size will be the maximum capacity for writing.
- Attach LUN to the snapshot.

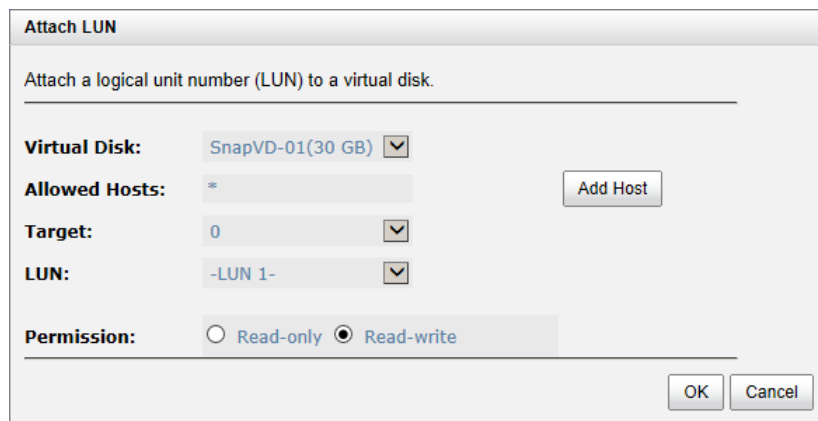

- Done. The Snapshot can be used.

Cleanup Snapshots


To clean up all the snapshots, please follow the procedures.

- There are two methods to cleanup snapshots. In **Virtual Disks** tab, selects a virtual disk. And then click ▼ -> **Cleanup Snapshots** or in **Snapshots** tab, click **Cleanup Snapshots** button.
- Click **OK** to apply. It will delete all snapshots of the virtual disk and release the snapshot space.

Schedule Snapshots

The snapshots can be taken by schedule such as hourly or daily. Please follow the procedures.

1. There are two methods to set schedule snapshots. In **Virtual Disks** tab, selects a virtual disk. And then click ▼ -> **Schedule Snapshots** or in **Snapshots** tab, click **Schedule Snapshots** button.
2. Check the schedules which you want. They can be set by monthly, weekly, daily, or hourly. Check **Auto Mapping** to attach LUN automatically when the snapshot is taken. And the LUN is allowed to access by **Allowed Hosts**.
3. Click **OK** to apply.

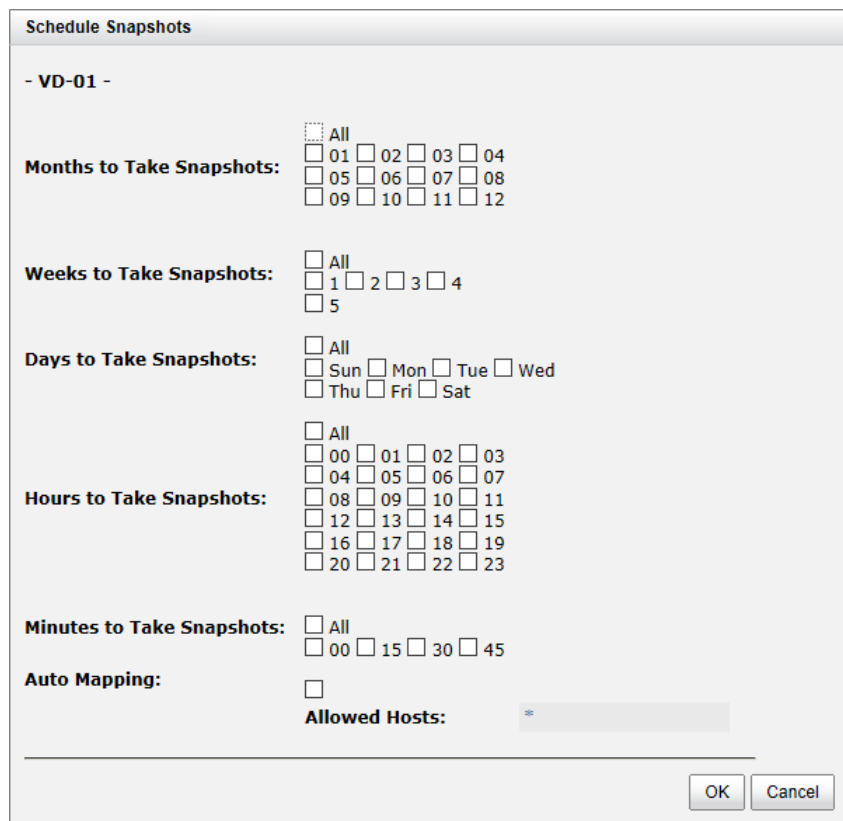

Schedule Snapshots

- VD-01 -

Months to Take Snapshots: All
 01 02 03 04
 05 06 07 08
 09 10 11 12

Weeks to Take Snapshots: All
 1 2 3 4
 5

Days to Take Snapshots: All
 Sun Mon Tue Wed
 Thu Fri Sat

Hours to Take Snapshots: All
 00 01 02 03
 04 05 06 07
 08 09 10 11
 12 13 14 15
 16 17 18 19
 20 21 22 23

Minutes to Take Snapshots: All
 00 15 30 45

Auto Mapping:

Allowed Hosts: *

OK Cancel



TIP:

Daily snapshot will be taken at every 00:00. Weekly snapshot will be taken every Sunday 00:00. Monthly snapshot will be taken every first day of month 00:00.

Rollback

The data in snapshot can roll back to the original virtual disk. Please follow the procedures.

1. In **Snapshots** tab, selects a snapshot. And then click ▼ -> **Rollback**.
2. Click **OK** to apply.



CAUTION:

Before executing rollback, it is better that the disk is unmounted on the host computer for flushing data from cache.


Snapshot Constraint

Snapshot function applies Copy-on-Write technique on virtual disk and provides a quick and efficient backup methodology. When taking a snapshot, it does not copy any data at first time until a request of data modification comes in. The snapshot copies the original data to snapshot space and then overwrites the original data with new changes. With this technique, snapshot only copies the changed data instead of copying whole data. It will save a lot of disk space.

- Create a data-consistent snapshot

Before using snapshot, user has to know why sometimes the data corrupts after rollback of snapshot. Please refer to the following diagram.

When user modifies the data from host, the data will pass through file system and memory of the host (write caching). Then the host will flush the data from memory to physical disks, no matter the disk is local disk (IDE or SATA), DAS (SCSI or SAS), or SAN (fibre or iSCSI). From the viewpoint of storage device, it cannot control the behavior of host side. This case maybe happens. If a snapshot is taken, some data is still in memory and not flush to disk. Then the snapshot may have an incomplete image of original data. The problem does not belong to the storage device. To avoid this data inconsistent issue between snapshot and original data, user has to make the operating system flush the data from memory of host (write caching) into disk before taking snapshot.

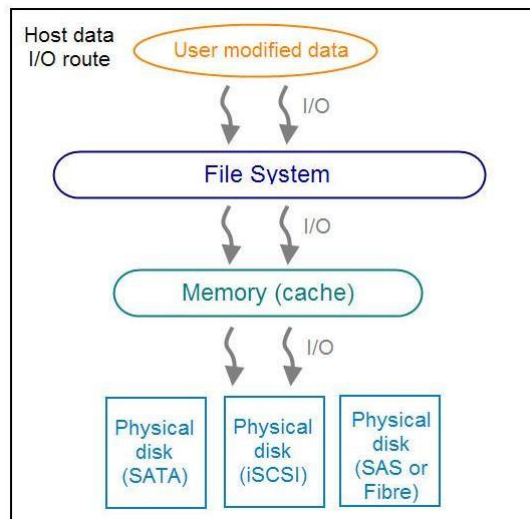

On Linux and UNIX platform, a command named **sync** can be used to make the operating system flush data from write caching into disk. For Windows platform, Microsoft also provides a tool – **sync**, which can do exactly the same thing as the **sync** command in Linux/UNIX. It will tell the OS to flush the data on demand. For more detail about **sync** tool, please refer to <http://technet.microsoft.com/en-us/sysinternals/bb897438.aspx>

Besides the **sync** tool, Microsoft develops **VSS** (volume shadow copy service) to prevent this issue. VSS is a mechanism for creating consistent point-in-time copies of data known as shadow copies. It is a coordinator between backup software, application (SQL or Exchange...) and storages to make sure the snapshot without the problem of data-inconsistent. For more detail about the VSS, please refer to <http://technet.microsoft.com/en-us/library/cc785914.aspx>. JetStor storagesystem can support Microsoft VSS.

- What if the snapshot space is over?

Before using snapshot, a snapshot space is needed from RAID group capacity. After a period of working snapshot, what if the snapshot size over the snapshot space of user defined? There are two different situations:

1. If there are two or more snapshots existed, the system will try to remove the oldest snapshots (to release more space for the latest snapshot) until enough space is released.
2. If there is only one snapshot existed, the snapshot will fail. Because the snapshot space is run out.

For example, there are two or more snapshots existed on a virtual disk and the latest snapshot keeps growing. When it comes to the moment that the snapshot space is run out, the system will try to remove the oldest snapshot to release more space for the latest snapshot usage. As the latest snapshot is growing, the system keeps removing the old snapshots. When it comes that the latest snapshot is the only one in system, there is no more snapshot space which can be released for incoming changes, then snapshot will fail.

- How many snapshots can be created on a virtual disk?

There are up to 64 snapshots can be created per virtual disk. What if the 65th snapshot has been taken? There are two different situations:

1. If the snapshot is configured as schedule snapshot, the latest one (the 65th snapshot) will replace the oldest one (the first snapshot) and so on.
2. If the snapshot is taken manually, when taking the 65th snapshot will fail and a warning message will be showed on Web UI.

- Rollback and delete snapshot

When a snapshot has been rolled back, the related snapshots which are earlier than it will also be removed. But the rest snapshots will be kept after rollback. If a snapshot has been deleted, the other snapshots which are earlier than it will also be deleted. The space occupied by these snapshots will be released after deleting.

Clone

Clone function can backup data from the source virtual disk to target. Here is the clone operation. At the beginning, copy all data from the source virtual disk to target. It is also called full copy. Afterwards, use snapshot technology to perform the incremental copy. Please be fully aware that the incremental copy needs to use snapshot to compare the data difference. Therefore, the enough snapshot space for the virtual disk is very important. Of course, clone job can also be set as schedule.

Setup Clone

Take an example of clone the virtual disk.

1. Before cloning, it must prepare backup target virtual disk. In **Virtual Disks** tab, click **Create** button. And then select **Disk Type** to **Backup Target**.

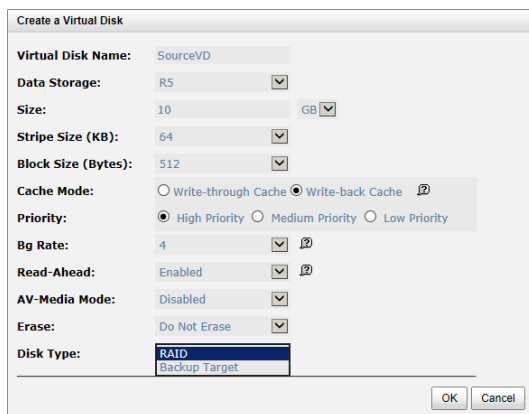


Figure 1: Source side


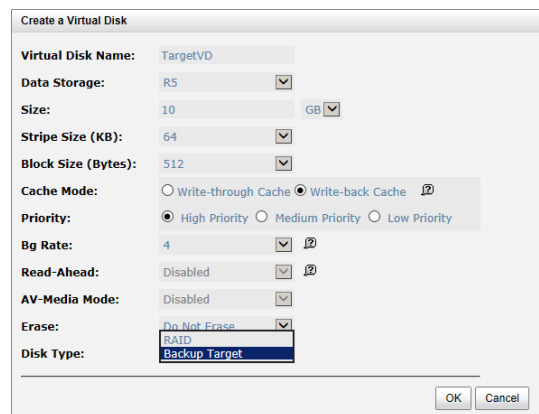


Figure 2: Target side

2. Select the source virtual disk, and then click ▼ -> **Set Clone**.
3. Select a target virtual disk, and then click **OK** button.

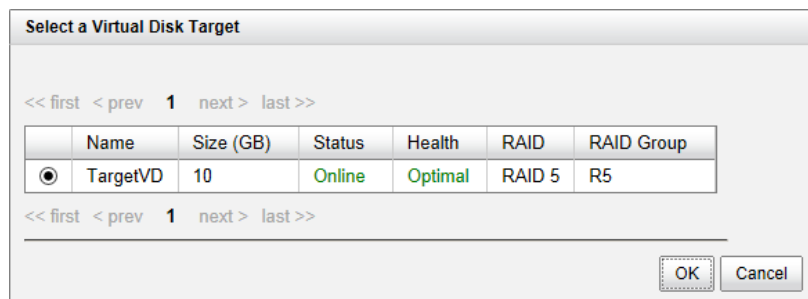


| Name | Size (GB) | Status | Health | RAID | RAID Group |
|-------------------------------------------|-----------|--------|---------|--------|------------|
| <input checked="" type="radio"/> TargetVD | 10 | Online | Optimal | RAID 5 | R5 |

- At this time, if the source virtual disk has no snapshot space, it will be allocated snapshot space for clone usage automatically. The size will depend on the parameter of **Cloning Options**.

Start and Stop Clone

To start clone, please follow the procedures.

- Select the source virtual disk, and then click ▼ -> **Start Clone**.
- Click **OK** button. The source virtual disk will take a snapshot, and then start cloning.

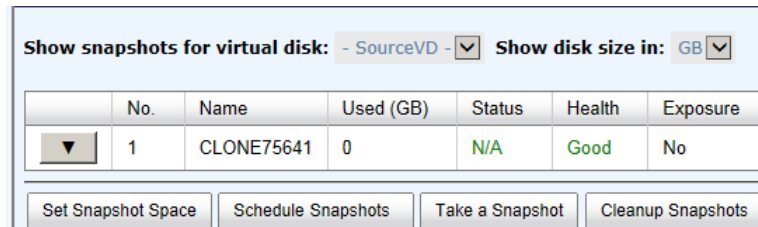

To stop clone, please follow the procedures.

- Select the source virtual disk, and then click ▼ -> **Stop Clone**.
- Click **OK** button to stop cloning.

Schedule Clone

The clone job can be set by schedule such as hourly or daily. Please follow the procedures.

- Select the source virtual disk, and then click ▼ -> **Schedule Clone**.
- Check the schedules which you want. They can be set by monthly, weekly, daily, or hourly. Click **OK** button to apply.

Clone - Set Clone Schedule

Set Clone Schedule: SourceVD

Months in the Year: All
 01 02 03 04
 05 06 07 08
 09 10 11 12

Weeks in the Month: All
 1 2 3 4
 5

Days of the Week: All
 Sun Mon Tue Wed
 Thu Fri Sat

Hours in the Day: All
 00 01 02 03
 04 05 06 07
 08 09 10 11
 12 13 14 15
 16 17 18 19
 20 21 22 23

Minutes in the Hour: All
 00 15 30 45



TIP: Daily clone will be taken at every 00:00. Weekly clone will be taken every Sunday 00:00. Monthly clone will be taken every first day of month 00:00.

Cloning Options

There are three clone options, described on the following.

Cloning Options

Snapshot Space: 2

Threshold: 50%

Restart the task an hour later if it failed: Enabled

- Snapshot Space:** This setting is the ratio of the source virtual disk and snapshot space. If the ratio sets to 2, it means when the clone process is starting, the system will book the free RAID group space to set as the snapshot space which capacity is double the source virtual disk automatically. The options are 0.5 ~ 3.
- Threshold:** The setting will be effective after enabling schedule clone. The threshold will monitor the usage amount of the snapshot space. When the used snapshot space achieves the threshold, system will take a snapshot and start clone process automatically. The purpose of threshold could prevent the incremental copy failure immediately when running

out of the snapshot space. For example, the default threshold is 50%. The system will check the snapshot space every hour. When the snapshot space is used over 50%, the system will start clone job automatically. And then continue monitoring the snapshot space. When the rest snapshot space has been used 50%, in other words, the total snapshot space has been used 75%, the system will start clone job again.

- **Restart the task an hour later if failed:** The setting will be effective after enabling schedule clone. When running out of the snapshot space, the virtual disk clone process will be stopped because there is no more available snapshot space. If this option is checked, the system will clear the snapshots of clone in order to release snapshot space automatically, and the clone task will be restarted after an hour. This task will start a full copy.

**CAUTION:**

The default snapshot space allocated by the system is two times the size of source virtual disk. That is the best value of our suggestion. If user sets snapshot space by manually and lower than the default value, user should take the risk if the snapshot space is not enough and the clone job will fail.

Clear Clone


To clear the clone job, please follow the procedures.

1. Select the source virtual disk, and then click ▼ -> **Clear Clone**.
2. Click **OK** button to clear clone job.

Clone Constraint

While the clone is processing manually, the increment data of the virtual disk is over the snapshot space. The clone will complete the task, but the clone snapshot will fail. At the next time, when trying to start clone, it will get a warning message “This is not enough of snapshot space for the operation”. The user needs to clean up the snapshot space in order to operate the clone process. Each time the clone snapshot failed, it means that the system loses the reference value of incremental data. So it will start a full copy at the next clone process.

When running out of the snapshot space, the flow diagram of the virtual disk clone procedure will be like the following.

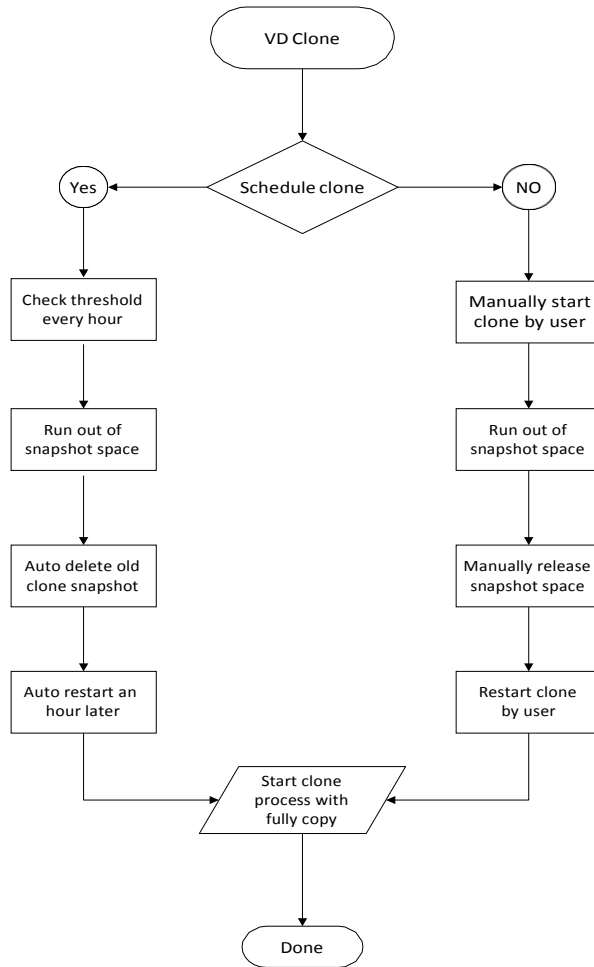

QReplicas

QReplicas function can replicate data easily through LAN or WAN from one system to another. Here is the replication operation. At the beginning, copy all data from the source virtual disk to target. It is also called full copy. Afterwards, use snapshot technology to perform the incremental copy. Please be fully aware that the incremental copy needs to use snapshot to compare the data difference. Therefore, the enough snapshot space for the virtual disk is very important. Of course, replication task can also be set as schedule. The following table is the comparison with QReplica 1.0 and 2.0. QReplica 2.0 starts from FW 1.1.0.

| | V2.0 | V1.0 |
|-----------------------------------|------------------------------------------|---------------------------|
| Replication port | Any iSCSI data port | Specified iSCSI port only |
| Tasks per controller | 16 tasks | 8 tasks |
| MPIO | 2 paths per task | 2 paths per task |
| MC/S | 4 connections per session | N/A |
| Traffic shaping | 8 traffic shapers can apply to each task | N/A, max 20 MB/s |
| Traffic shaping scheduling | Peak and off-peak to apply | N/A |

| | | |
|-----------------|------------------------------------------------------------------|----------|
| | different traffic shaping | |
| Snapshot | Auto rollback to latest image if any accident during replication | Manually |

Create QReplica Task

Take an example of creating the QReplica task.

- Before replication, it must prepare backup target virtual disk. In **Virtual Disks** tab of the target side, click **Create** button. And then select **Disk Type** to **Backup Target**.

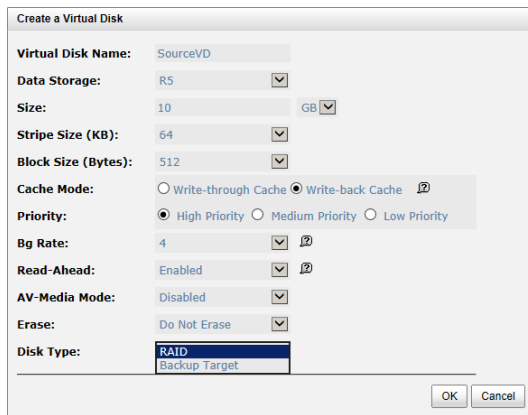


Figure 1: Source Side

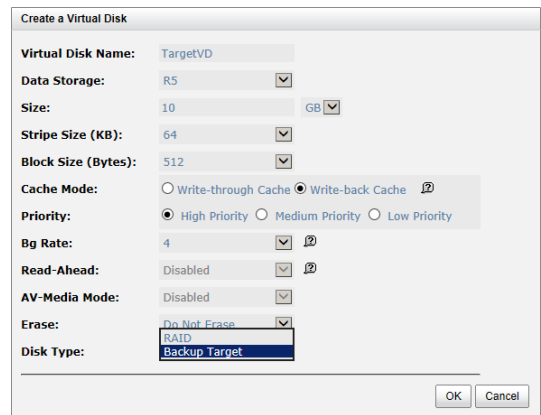


Figure 2: Target Side

- After creating the target virtual disk, please also setup snapshot space. The snapshot of the source virtual disk can replicate to the target virtual disk. In **Virtual Disks** tab, selects the backup virtual disk. And then click ▼ -> **Set Snapshot Space**.
- Enter a **Size** which is reserved for the snapshot space, and then click **OK** button.
- Attach LUN of the source and target virtual disk separately.

| | Name | Size (GB) | Write | Priority | Bg Rate | Type |
|---|----------|-----------|-------|----------|---------|------|
| ▼ | SourceVD | 10 | WB | HI | 4 | RAID |

Figure 3: Source Side

| | Name | Size (GB) | Write | Priority | Bg Rate | Type |
|---|----------|-----------|-------|----------|---------|--------|
| ▼ | TargetVD | 10 | WB | HI | 4 | BACKUP |

Figure 4: Target Side

- In **QReplicas** tab of the source side, click **Create** button.
- Select a target virtual disk, and then click **Next** button.

QReplia - Select a Source Virtual Disk

<< first < prev 1 next > last >>

| | Name | Size (GB) | Status | RAID | LUN # | Snapshot # | RAID Group |
|----------------------------------|----------|-----------|--------|--------|-------|------------|------------|
| <input checked="" type="radio"/> | SourceVD | 10 | Online | RAID 5 | 1 | 0 | R5 |

<< first < prev 1 next > last >>

Next >> Cancel

7. Select the **Source Port** and input the **Target IP**, and then click **Next** button.

QReplia - Select Target IP Address

Source Port: LAN1

Target IP: 10.0.0.2

<< Back Next >> Cancel

8. Select **Authentication Method** and input the CHAP user if needed. Select a **Target Node**, and then click **Next** button.

QReplca - Set iSCSI Authentication Information

Choose Authentication Method

No Authentication Method

CHAP

Users: (Max: 223)

Secret: (Min: 12, Max: 16)

Select a Target Node

| No. | Name |
|------------------------------------|----------------------------|
| <input checked="" type="radio"/> 1 | iqn.2004-08.com :dev0.ctr1 |

<< Back Next >> Cancel

9. Select a Target LUN. When a replication job completes, it will take a snapshot on its target virtual disk. Please make sure the snapshot space of the backup virtual disk on the target side is properly configured. Finally, click **Finish** button.


QReplca - Select a Target LUN

When a replication job completes, it will take a snapshot on its target virtual disk. Please make sure the snapshot space of the backup virtual disk on the target side is properly configured.

| No. | LUN | Virtual Disk | Size (GB) | Vendor | Model | Serial Number |
|------------------------------------|-----|--------------|-----------|---------|-----------|------------------|
| <input checked="" type="radio"/> 1 | 1 | TargetVD | 10 | JetStor | 724HSD-v2 | 20f3001378900640 |

<< Back Finish Cancel

10. The replication task is created.

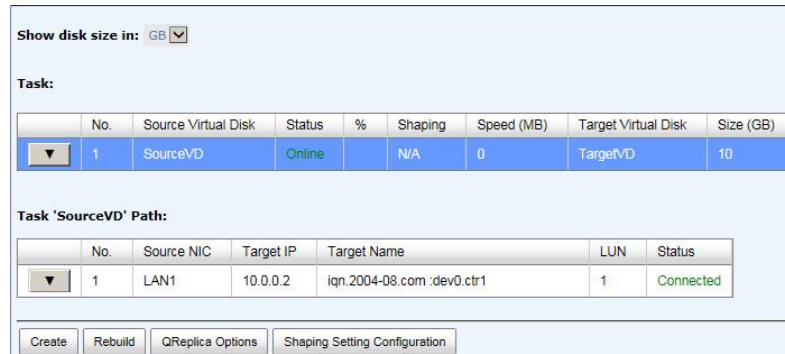

- At this time, if the source virtual disk has no snapshot space, it will be allocated snapshot space for replication usage automatically. The size will depend on the parameter of **QReplica Options**.

Start and Stop QReplica Task

To start replication task, please follow the procedures.

- In **QReplicas** tab of the source side, select the task, and then click ▼ -> **Start**.
- Click **OK** button. The source and target virtual disks will take snapshots, and then start replication.

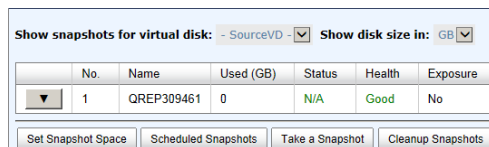


Figure 5: Source side

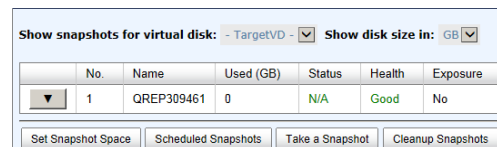


Figure 6: Target side

To stop replication task, please follow the procedures.

- In **QReplicas** tab of the source side, select the task, and then click ▼ -> **Stop**.
- Click **OK** button to stop replication.

MPIO

To setup MPIO (Multi Path Input/Output) of the replication task, please follow the procedures.

- In **QReplicas** tab of the source side, select the task, and then click ▼ -> **Add Path**.
- Next steps are the same as the procedure of creating a new replication task.


To delete multi path of the replication task, please follow the procedures.

- In **QReplicas** tab of the source side, select the task, and then click ▼ -> **Delete Path**.
- Select the path(s) which want to be deleted, and then click **OK** button.
- The multi path(s) are deleted.

MC/S

To setup MC/S (Multiple Connections per Session) of the replication task path, please follow the procedures.

1. In **QReplicas** tab of the source side, select the task path, and then click ▼ -> **Add Connection**.

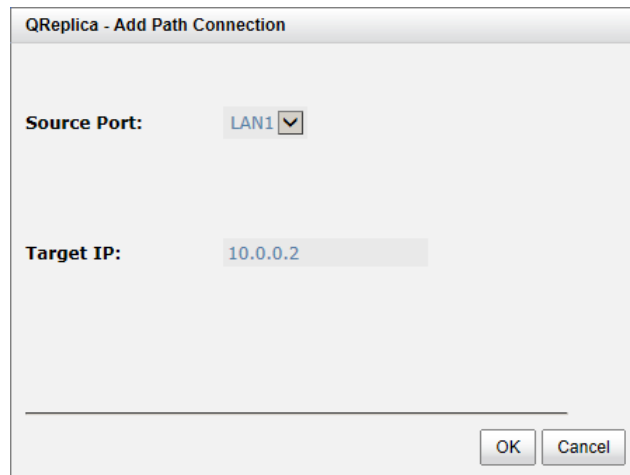

2. Select the **Source Port** and input the **Target IP**, and then click **OK** button.
3. The connection is added.


To delete multi connections per session of the replication task path, please follow the procedures.

1. In **QReplicas** tab of the source side, select the task path, and then click ▼ -> **Delete Connection**.
2. Select the connection(s) which want to be deleted, and then click **OK** button.
3. The multi connection(s) are deleted.


Task Shaping

If the replication traffic affects the normal usage, we provide a method to limit it. There are eight shaping groups which can be set. In each shaping group, we also provide peak and off-peak time slot for different bandwidth. The following take an example of setting shaping group.

1. In **QReplicas** tab of the source side, click **Shaping Setting Configuration** button.

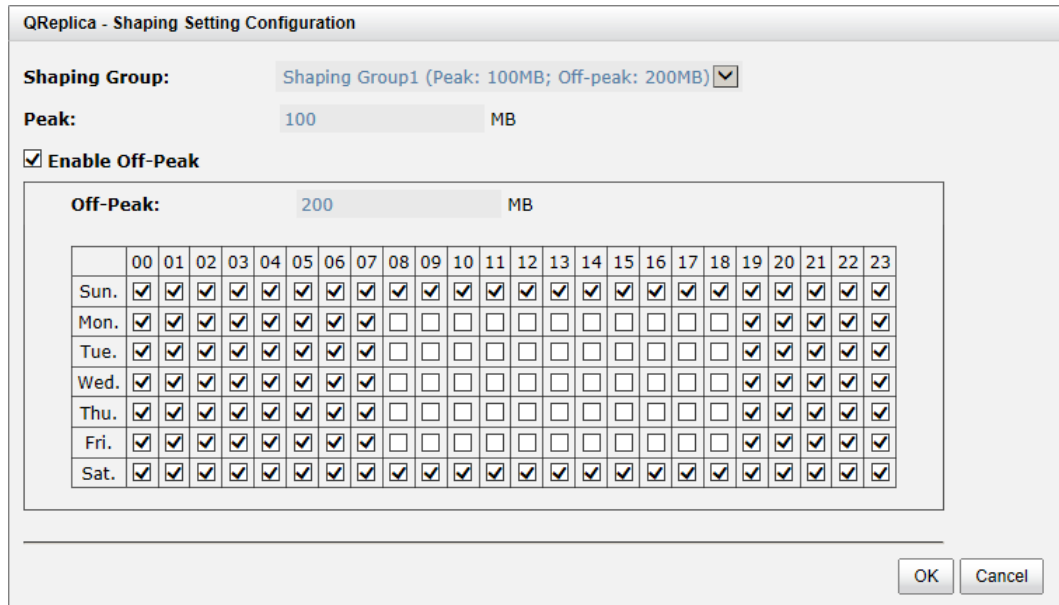

2. Select a **Shaping Group** to setup.
3. Input the bandwidth (MB) at the **Peak** time.
4. If needed, check **Enable Off-Peak**, and then input the bandwidth (MB) at **Off-Peak** time. And define the off-peak hour.
5. Click **OK** button.
6. In **QReplicas** tab, select the task, and then click ▼ -> **Set Task Shaping**.

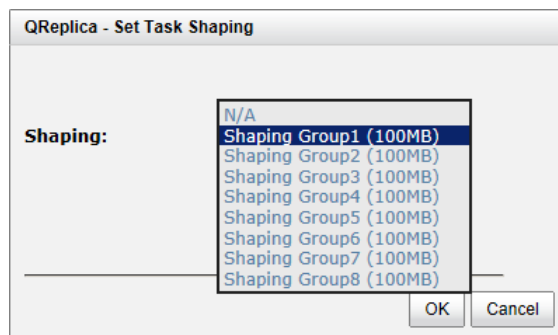

7. Select a Shaping Group from the drop down list. And then click **OK** button.
8. The shaping group is applied to the replication task.

Schedule QReplica Task

The replication task can be set by schedule such as hourly or daily. Please follow the procedures.

1. In **QReplicas** tab, select the task, and then click ▼ -> **Schedule**.
2. Check the schedules which you want. They can be set by monthly, weekly, daily, or hourly. Click **OK** to apply.

QReplica - Set a QReplica Schedule

Set a QReplica Schedule: SourceVD

Months in the Year: All
 01 02 03 04
 05 06 07 08
 09 10 11 12

Weeks in the Month: All
 1 2 3 4
 5

Days of the Week: All
 Sun Mon Tue Wed
 Thu Fri Sat

Hours in the Day: All
 00 01 02 03
 04 05 06 07
 08 09 10 11
 12 13 14 15
 16 17 18 19
 20 21 22 23

Minutes in the Hour: All
 00 15 30 45



TIP:

Daily replication will be taken at every 00:00. Weekly replication will be taken every Sunday 00:00. Monthly replication will be taken every first day of month 00:00.

QReplica Options

There are three QReplica options, described on the following.

QReplica Options

Snapshot Space: 2

Threshold: 50%

Restart the task an hour later if it failed: Enabled

- **Snapshot Space:** This setting is the ratio of the source virtual disk and snapshot space. If the ratio sets to 2, it means when the replication process is starting, the system will book the free RAID group space to set as the snapshot space which capacity is double the source virtual disk automatically. The options are 0.5 ~ 3.
- **Threshold:** The setting will be effective after enabling schedule replication. The threshold will monitor the usage amount of the snapshot space. When the used snapshot space

achieves the threshold, system will take a snapshot and start replication process automatically. The purpose of threshold could prevent the incremental copy failure immediately when running out of the snapshot space. For example, the default threshold is 50%. The system will check the snapshot space every hour. When the snapshot space is used over 50%, the system will start replication job automatically. And then continue monitoring the snapshot space. When the rest snapshot space has been used 50%, in other words, the total snapshot space has been used 75%, the system will start replication task again.

- **Restart the task an hour later if failed:** The setting will be effective after enabling schedule replication. When running out of the snapshot space, the virtual disk replication process will be stopped because there is no more available snapshot space. If this option is checked, the system will clear the snapshots of replication in order to release snapshot space automatically, and the replication task will be restarted after an hour. This task will start a full copy.

**CAUTION:**

The default snapshot space allocated by the system is two times the size of source virtual disk. That is the best value of our suggestion. If user sets snapshot space by manually and lower than the default value, user should take the risk if the snapshot space is not enough and the replication task will fail.

Delete QReplica Task

To delete the replication task, please follow the procedures.

1. Select the task in **QReplicas** tab, and then click ▼ -> **Delete**.
2. Click **OK** button to delete the replication task.

Clone Transfers to QReplica

It is always being a problem that to do full copy over LAN or WAN when the replication task is executed at the first time. It may take days or weeks to replicate data from source to target within limited network bandwidth. We provide two methods to help user shorten the time of executing full copy.


1. One is to skip full copy on a new, clean virtual disk. The term “clean” means that the virtual disk has never been written data since created. For a new created virtual disk which has not been accessed, the system will recognize it and skip full copy automatically when the replication task is created on this virtual disk at the first time.

**TIP:**

Any I/O access to the new created virtual disk will make it as “not clean”, even though executing “Erase” function when a virtual disk is created. The full copy


will take place in such a case.

- The other way is to use virtual disk clone function, which is a local data copy function between virtual disks to execute full copy at the first time. Then move all the physical drives of the target virtual disk to the target system and then turn the cloning job into replication task with differential copy afterward.

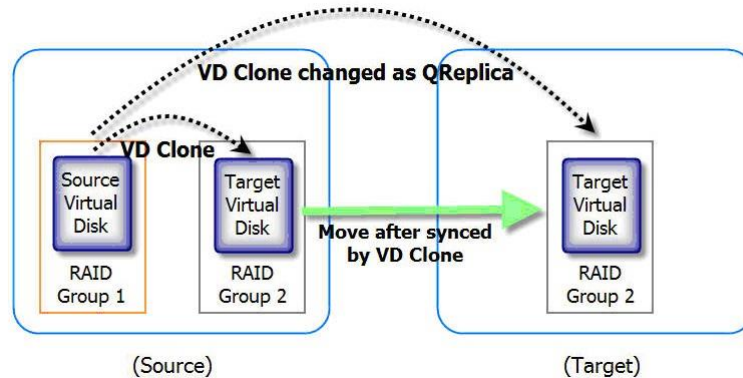

To do that virtual disk clone transfers to QReplica, please follow the procedures.

- Create a clone job on an existing virtual disk with data stored already.
- It is better that there is no host connected to the source virtual disk. Then run **Set Clone**, **Start Clone** to synchronize the data between source and target virtual disks.
- After the data is synchronized, change the cloning job to a QReplica task. Select the source virtual disk, and then click ▼ -> **Change QReplica Options**.

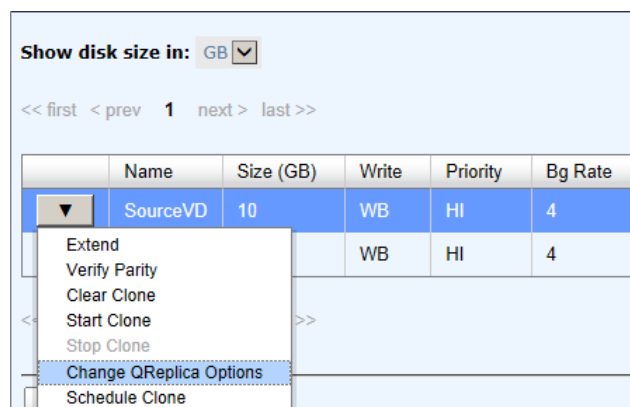

- The **Clone** column of the source virtual disk will be changed from the name of the target virtual disk into **QRep**.

Show disk size in:

<< first < prev 1 next > last >>


| | Name | Size (GB) | Write | Priority | Bg Rate | Type | Clone |
|---|----------|-----------|-------|----------|---------|--------|-------|
| ▼ | SourceVD | 10 | WB | HI | 4 | RAID | QRep |
| ▼ | TargetVD | 10 | WB | HI | 4 | BACKUP | N/A |



CAUTION:

Changing a cloning job to a replication task is only available when the cloning job has been finished. This change is irreversible.

- Deactivate the RAID group which the target virtual disk resides in and move all physical disks of the RAID group to the target system. Then activate the RAID group in the target system. Remember to set snapshot space for the target virtual disk. And then attach the target virtual disk to a LUN ID.
- In **QReplicas** tab of the source side, click **Rebuild** button to rebuild the replication task which is changed from a cloning job formerly.
- Rebuild the clone relationship, select a source virtual disk.

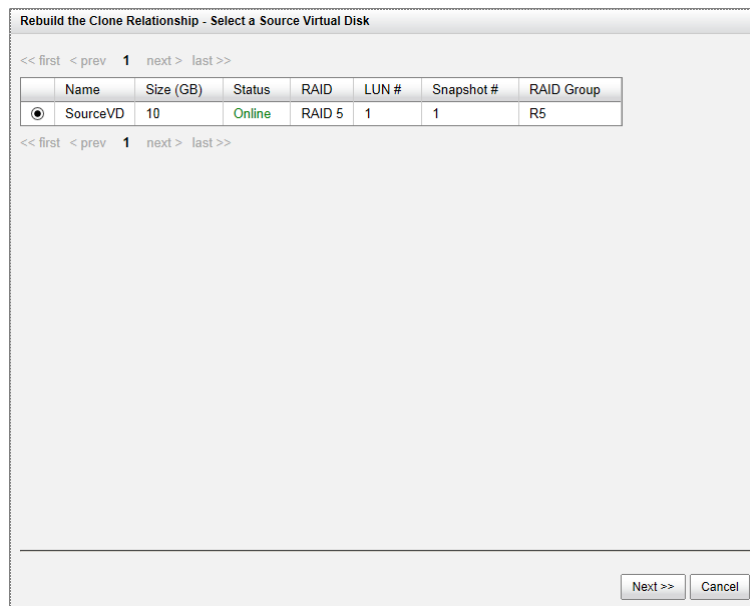


- Next steps are the same as the procedure of creating a new replication task.
- If a wrong target virtual disk is selected when rebuilding the replication task, there will be an alert and the system stops the creation.

Fast Rebuild

When executing rebuild, the Fast Rebuild feature skips any partition of the virtual disk where no write changes have occurred, it will focus only on the parts that have changed. This mechanism may reduce the amount of time needed for the rebuild task. It also reduces the risk of RAID failure cause of reducing the time required for the RAID status from degraded mode to healthy. At the same time, it frees up CPU resources more quickly to be available for other I/O and demands.

Solution

Without Fast Rebuild feature, rebuild will start from the beginning partition to the end. It may spend lots of time to complete the task. When enabling Fast Rebuild feature, it will rebuild the partition with the changed only.

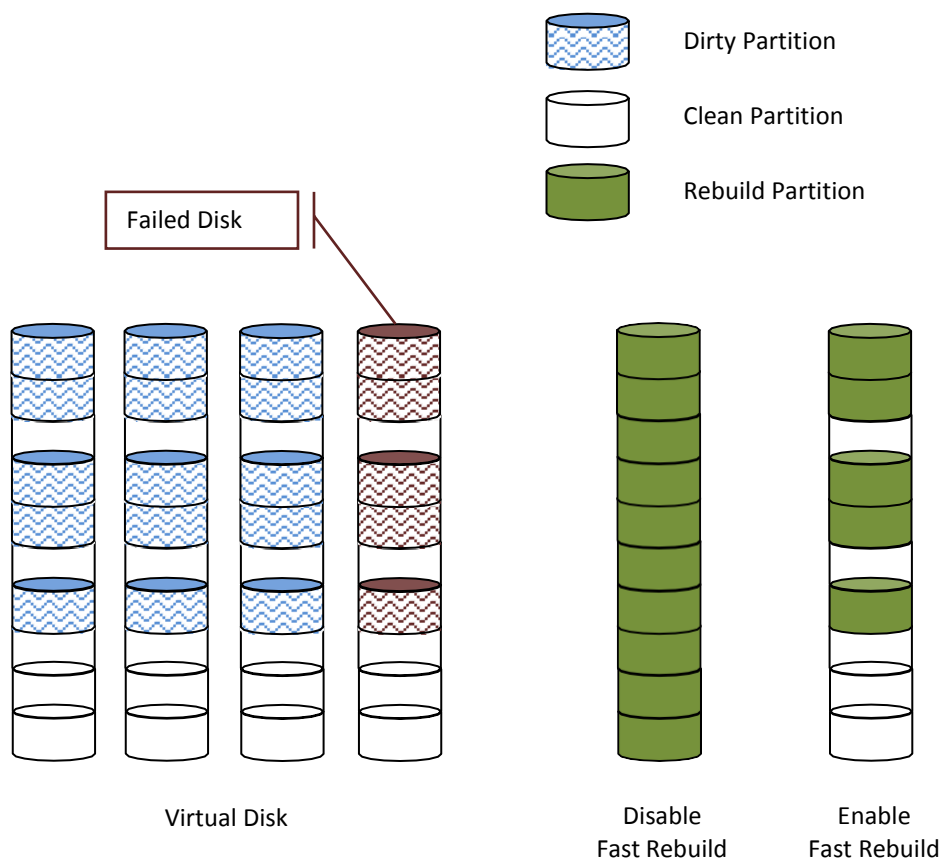


TIP:

With less changed partition, the Fast Rebuild feature may go faster. If the virtual disk is full of changed partition, the rebuild may take the same time without Fast Rebuild feature.

Configuration

When creating a virtual disk, enable the Fast Rebuild. The default is disabled.

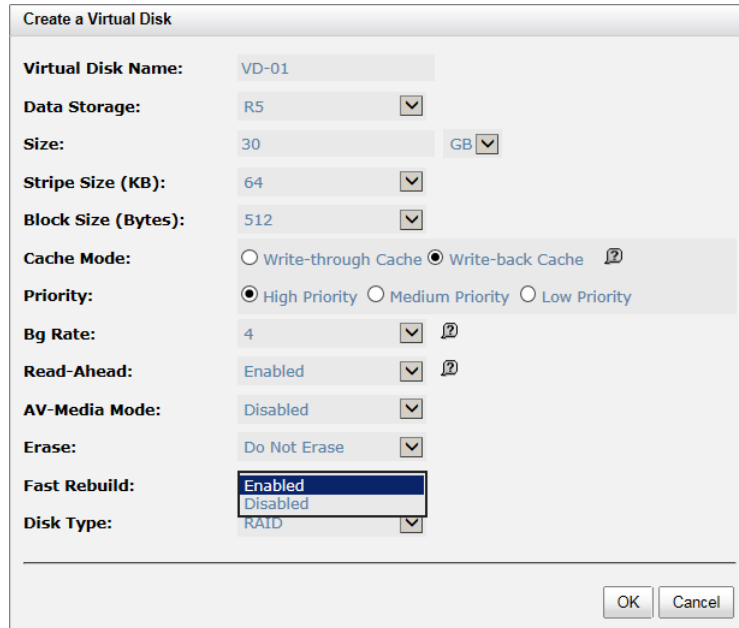

The screenshot shows a 'Create a Virtual Disk' dialog box with the following settings:

- Virtual Disk Name: VD-01
- Data Storage: R5
- Size: 30 GB
- Stripe Size (KB): 64
- Block Size (Bytes): 512
- Cache Mode: Write-back Cache (selected)
- Priority: High Priority (selected)
- Bg Rate: 4
- Read-Ahead: Enabled
- AV-Media Mode: Disabled
- Erase: Do Not Erase
- Fast Rebuild: Enabled (selected in the open dropdown)
- Disk Type: RAID

Constraint

Here are some constraints about Fast Rebuild.

- Only thick/fat RAID group supports this feature. Thin provision RAID group already has this feature implement.
- When rebuild happened in a fast rebuild virtual disk, clean partitions are not rebuilt since there are no data saved there. Though clean partitions are never rebuilt, their health status is good.
- If all partitions of the fast rebuild virtual disk are clean, then no rebuild would happen and no event would be sent.
- The RAID stacks could not use optimize algorithm to compute parities of a partition which is not rebuilt. Thus, the performance of random write in a clean partition would be worse.



CAUTION:

The fast rebuild should not be enabled for a virtual disk whose access pattern is random write.

SSD Caching

The traditional storage technology is stored in the HDDs (Hard Disk Drives) and SSDs (Solid-State Drives) are mainly used in mission critical applications where the speed of the storage system needed to be as high as possible. In recent years, the capacity of HDDs has increased; but their random input/output (I/O) has not increased at the same rate. For some applications such as enterprise web with database, cloud, and virtualization which require both high capacity and performance, HDDs have the superiority in capacity but lower speed. It means the pure HDD storage is not enough for those applications.

Using the superiority of SSDs, offer exceptionally high speed, SSD caching technology provides the best way to fulfill cost-effectively the performance and capacity requirements of their enterprise applications. Integrated HDDs and SSDs into the storage combine the benefits of both. SSD cache feature enables the system to use SSDs as extended cache, thus increasing the performance of random I/O applications such as databases, file servers, and web servers, etc.

Generally, the SSD caching is useful for the following features:

1. Due to the HDD IOPS, read performance cause the bottleneck.
2. In working space, read I/O is much more than write.
3. The best performance is in the case, the working data size is repeatedly accessed and smaller than the size of SSD cache capacity.

Solution

SSD caching is the secondary cache used to enable better performance. One and more SSDs could be assigned to a single virtual disk to be its SSD caching space. Be attention that the cache volume is not available for regular data storage. Currently, the maximum SSD cache size allowed in a system is 2.4TB.

Methodology

When the read or write I/O performs, this feature copies the data from HDD into SSD. At the next time, any subsequent I/O read of the same logical block addresses can be read directly from SSD. It increases the overall performance with a much lower response time. If the SSDs fail unfortunately, you won't worry the data loss because the data caching in the SSD is a copy of the original which is residing on HDD.

SSD caching is divided into group of sectors of equal sizes. Each group is called a cache block; each block is divided into sub-blocks. The I/O type configured for a virtual disk would affects size of the cache block and size of sub-blocks.

Populating the Cache

The actions that read data from the HDD and write to the SSD are called populating the cache. It is a background operation that typically immediately follows a host read or write operation. The constraint is that two parameters are used to determine when to start a cache-populate operation:

1. Populate-on-read threshold: The value is great than zero. If it is zero, no action is performed for read cache.
2. Populate-on-write threshold: It's the same action as read.


According to these values, each cache block has associated to its read and write counts. When a host requests the read data located on the cache block, its read count is increment. If a cache hit does not occur, and the read count is greater than or equal to the populate-on-read threshold, then a cache-populate operation is performed with the host read concurrently. If a cache hit occurs, a populate operation is not performed. If the read count is smaller than the threshold, the count continues and a populate operation is not performed neither.

For write cases, it's the same scenario as read. We provide the figures to describe more details on the following.

Read/Write Cache Cases

- Read Data with Cache Miss

The following figure shows the steps of the controller which handles a host read request when some of the data is not in the SSD cache.

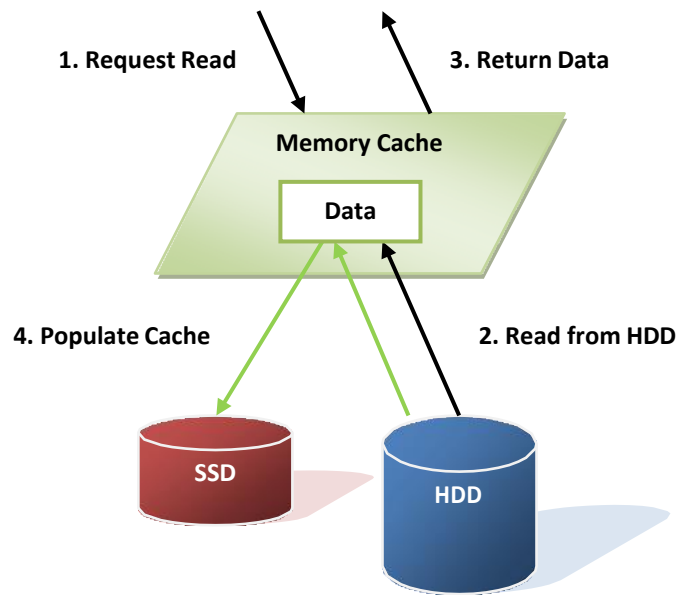


The following steps describe details about a host read with a cache miss:

1. A host requests a read data.
2. Read data from the HDD.
3. Return requested data to the host.
4. Populate the cache to SSD.

- Read Data with Cache Hit

The following figure shows the steps of the controller which handles a host read request when the data is in the SSD cache.

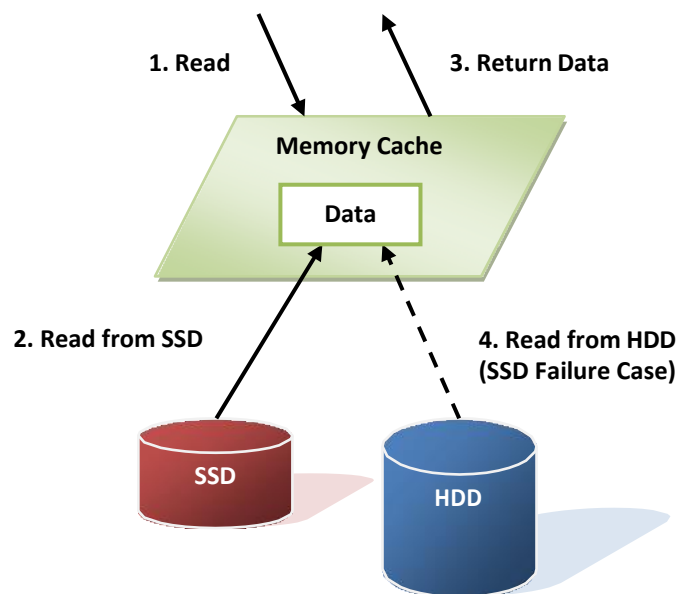


The following steps describe details about a host read with a cache hit:

1. A host requests a read data.
2. Read data from the SSD.
3. Return requested data to the host.
4. If SSD has error, read data from the HDD.

- Write Data

The following figure shows the steps of the controller which handles a host write request.

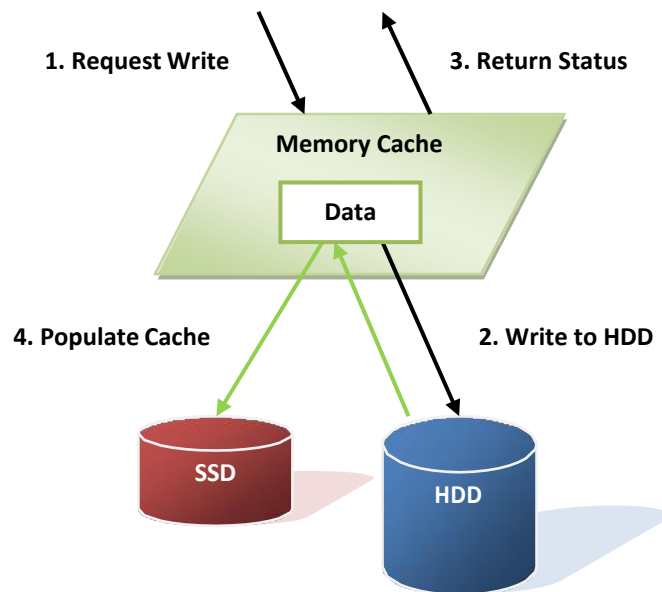

The following steps describe details about a host write:

1. A host requests a write data.
2. Write data to the HDD.
3. Return the status to the host.
4. Populate the cache to SSD.

I/O Type

The type of I/O access is a user-selectable SSD cache configuration. The user-selectable I/O type controls the SSD cache internal settings for cache block size, sub-block size, populate-on-read threshold, and populate-on-write threshold. Three pre-defined I/O types are supported; they are database, file system, and web service. The user can select an I/O type to set the SSD cache of a virtual disk. When enabled SSD caching, the user can also change it online. But the cached data would be purged if the I/O type is changed. You may select the suitable I/O types depends on the

application to get the best performance. If the above three applications are not suitable, the last item is customization which you may set the configurations by yourself.

| I/O Type | Block Size (Sectors) | Sub-block Size (Sectors) | Populate-on-Read Threshold | Populate-on-Wrote Threshold |
|---------------|----------------------|--------------------------|----------------------------|-----------------------------|
| Database | 1MB (2,048) | 8KB (16) | 2 | 0 |
| File System | 2MB (4,096) | 16KB (32) | 2 | 2 |
| Web Service | 4MB (8,192) | 64KB (128) | 2 | 0 |
| Customization | 1MB/2MB/4MB | 8KB/16KB/64KB | ≥ 0 | ≥ 0 |

The block size affects the cache use and the warm up time. The cache use shows how much of the allocated cache actually holds the user data. And the warm up time is the process of how long to fill the cache. You can image that the highest cache use is obtained when all of the frequently reread data is located very close to other data that is frequently reread. Using a larger cache block size of I/O type is more useful to performance than a smaller one. Conversely, when frequently reread data is located far from other data that is frequently reread, the lowest cache use is obtained. In this case, the lowest cache block size of I/O type allows the most user data to be cached.

The sub-block size affects the cache warm up time, too. A larger sub-block size causes cache to fill more quickly than a smaller one, but it can also affect the response time of host I/O. Also occupy the system resource, such as CPU utilization, memory bandwidth, or channel utilization. A very high locality of reference can be more useful from a larger sub-block size than from a smaller one, especially if those blocks that are reread frequently reside in the same sub-block. This occurs when one I/O causes the sub-block to be populated and another I/O in the same sub-block gets a cache hit.

These are trade off depend on the applications. Users may set them by experience to get the best performance. Here we provide a formula which can calculate the estimate warm up time.

We define that

- T: Warm up time; seconds required.
- I: Best random IOPS of HDD.
- S: I/O Size.
- D: Number of HDDs.
- C: Total SSD caching capacity.
- P: Populate-on-read or Populate-on-write threshold.

We assume that random read/write from HDD to achieve the capacity of SSD should be

$$C * P = I * S * D * T$$

So we can estimate the warm up time, at least.

$$T = (C * P) / (I * S * D)$$

The real case may be longer than the estimate time. Here we take an example on the following.

- I: 250 IOPS (Random IOPS per HDD)
- S: 64KB (Web service)
- D: 16 HDDs
- C: 480GB (1 SSD)
- P: 2 (Populate-on-read threshold)

$$\text{Warm up time } T = (480\text{GB} * 2) / (250 * 64\text{KB} * 16) = 3932.16 \text{ seconds} = 65.536 \text{ minutes}$$

Configuration

Activate the license key

User needs to obtain a license key and download it to the system to activate the SSD caching function in **System Maintenance** -> **Upgrade** -> **SSD Caching License**. Each license key is unique and dedicated to a specific system. To obtain the license key, please contact sales for assistance.

Take an example of enabling SSD caching.

1. After creating a virtual disk, click ▼ -> **Set SSD Caching** of the selected virtual disk.
2. Check **Enable** box.
3. Select the policy by drop down menu.
4. Click **Select Disks** button, and then check the SSDs which are provided for SSD caching.
5. Click **OK** button to enable SSD caching.

Show disk size in: GB

<< first < prev 1 next > last >>

| | Name | Size (GB) | SSD Caching | Write | Priority | Bg Rate | Type | Clone | Schedule Clone | Status |
|---|-------|-----------|-------------|-------|----------|---------|------|-------|----------------|--------|
| ▼ | VD-01 | 10 | Database | WB | HI | 4 | RAID | N/A | N/A | Online |
| ▼ | VD-02 | 20 | Disable | WB | HI | 4 | RAID | N/A | N/A | Online |

<< first < prev 1

Set SSD Caching

Enable

Virtual Disk: VD-01

Policy: Database

Cache Block Size: 1 MB

Sub-block Size: 8 KB

Populate-on-read Threshold: 2

Populate-on-write Threshold: 0

Selected Disks: Local: 3

Select Disks

OK Cancel

Create Cloning

Constraint

Here are some constraints about SSD caching.

- Only SSD could be used SSD caching space of a virtual disk.
- A SSD could be assigned to one and only one virtual disk as its caching space.
- Up to 8 SSDs could be used as SSD cache of a virtual disk.
- Support up to 2.4TB of SSD caching space in one system.

6

Troubleshooting

System Buzzer

The system buzzer features are listed below:

- The system buzzer alarms 1 second when system boots up successfully.
- The system buzzer alarms continuously when there is error occurred. The alarm will be stopped after error resolved or be muted.
- The alarm will be muted automatically when the error is resolved. E.g., when RAID 5 is degraded and alarm rings immediately, user changes / adds one physical disk for rebuilding. When the rebuilding is done, the alarm will be muted automatically.

Event Notifications

Physical Disk Events

| Level | Type | Description |
|---------|---------------------|----------------------------------------------------|
| INFO | PD inserted | Disk <slot> is inserted into system |
| WARNING | PD removed | Disk <slot> is removed from system |
| ERROR | HDD read error | Disk <slot> read block error |
| ERROR | HDD write error | Disk <slot> write block error |
| ERROR | HDD error | Disk <slot> is disabled |
| ERROR | HDD IO timeout | Disk <slot> gets no response |
| INFO | PD upgrade started | PD [<string>] starts upgrading firmware process. |
| INFO | PD upgrade finished | PD [<string>] finished upgrading firmware process. |
| WARNING | PD upgrade failed | PD [<string>] upgrade firmware failed. |
| INFO | PD RPS started L2L | Assign PD <slot> to replace PD <slot>. |
| INFO | PD RPS finished L2L | PD <slot> is replaced by PD <slot>. |
| ERROR | PD RPS failed L2L | Failed to replace PD <slot> with PD <slot>. |

Hardware Events

| Level | Type | Description |
|---------|--------------|-----------------------------------------------|
| WARNING | ECC single | Single-bit ECC error is detected at <address> |
| ERROR | ECC multiple | Multi-bit ECC error is detected at <address> |
| INFO | ECC dimm | ECC memory is installed |
| INFO | ECC none | Non-ECC memory is installed |

| | | |
|-------|------------------------------|--------------------------------------------------------|
| INFO | SCSI bus reset | Received SCSI Bus Reset event at the SCSI Bus <number> |
| ERROR | SCSI host error | SCSI Host allocation failed |
| ERROR | SATA enable device fail | Failed to enable the SATA pci device |
| ERROR | SATA EDMA mem fail | Failed to allocate memory for SATA EDMA |
| ERROR | SATA remap mem fail | Failed to remap SATA memory io space |
| ERROR | SATA PRD mem fail | Failed to init SATA PRD memory manager |
| ERROR | SATA revision id fail | Failed to get SATA revision id |
| ERROR | SATA set reg fail | Failed to set SATA register |
| ERROR | SATA init fail | Core failed to initialize the SATA adapter |
| ERROR | SATA diag fail | SATA Adapter diagnostics failed |
| ERROR | Mode ID fail | SATA Mode ID failed |
| ERROR | SATA chip count error | SATA Chip count error |
| INFO | SAS port reply error | SAS HBA port <number> reply terminated abnormally |
| INFO | SAS unknown port reply error | SAS frontend reply terminated abnormally |
| INFO | FC port reply error | FC HBA port <number> reply terminated abnormally |
| INFO | FC unknown port reply error | FC frontend reply terminated abnormally |
| INFO | Port linkup | The Port <number> link status is changed to Up. |
| INFO | Port linkdown | The Port<number> link status is changed to Down. |

EMS Events

| Level | Type | Description |
|---------|------------------------------|--------------------------------------------------------------------------------|
| INFO | Power install | Power(<string>) is installed |
| ERROR | Power absent | Power(<string>) is absent |
| INFO | Power restore | Power(<string>) is restored to work. |
| ERROR | Power fail | Power(<string>) is not functioning |
| WARNING | Power detect | PSU signal detection(<string>) |
| INFO | Fan restore | Fan(<string>) is restored to work. |
| ERROR | Fan fail | Fan(<string>) is not functioning |
| INFO | Fan install | Fan(<string>) is installed |
| ERROR | Fan not present | Fan(<string>) is not present |
| ERROR | Fan over speed | Fan(<string>) is over speed |
| WARNING | Thermal level 1 | System temperature(<string>) is higher. |
| ERROR | Thermal level 2 | System Overheated(<string>)!!! |
| ERROR | Thermal level 2 shutdown | System Overheated(<string>)!!! The system will auto-shutdown immediately. |
| ERROR | Thermal level 2 CTR shutdown | The controller will auto shutdown immediately, reason [Overheated(<string>)]. |
| WARNING | Thermal ignore value | Unable to update thermal value on <string> |
| WARNING | Voltage level 1 | System voltage(<string>) is higher/lower. |
| ERROR | Voltage level 2 | System voltages(<string>) failed!!! |
| ERROR | Voltage level 2 shutdown | System voltages(<string>) failed!!! The system will auto-shutdown immediately. |

| | | |
|---------|------------------------------|----------------------------------------------------------------------------------------|
| ERROR | Voltage level 2 CTR shutdown | The controller will auto shutdown immediately, reason [Voltage abnormal(<string>)]. |
| INFO | UPS OK | Successfully detect UPS |
| WARNING | UPS fail | Failed to detect UPS |
| ERROR | UPS AC loss | AC loss for system is detected |
| ERROR | UPS power low | UPS Power Low!!! The system will auto-shutdown immediately. |
| WARNING | SMART T.E.C. | Disk <slot> S.M.A.R.T. Threshold Exceed Condition occurred for attribute <string> |
| WARNING | SMART fail | Disk <slot>: Failure to get S.M.A.R.T information |
| WARNING | RedBoot failover | RedBoot failover event occurred |
| WARNING | Watchdog shutdown | Watchdog timeout shutdown occurred |
| WARNING | Watchdog reset | Watchdog timeout reset occurred |

RMS Events

| Level | Type | Description |
|---------|----------------|--------------------------------------------------------------|
| INFO | Console Login | <username> login from <IP or serial console> via Console UI |
| INFO | Console Logout | <username> logout from <IP or serial console> via Console UI |
| INFO | Web Login | <username> login from <IP> via Web UI |
| INFO | Web Logout | <username> logout from <IP> via Web UI |
| INFO | Log clear | All event logs are cleared |
| WARNING | Send mail fail | Failed to send event to <email>. |

LVM Events

| Level | Type | Description |
|---------|---------------------|-------------------------------------------------------------------------|
| INFO | RG create OK | RG <name> has been created. |
| INFO | RG create fail | Failed to create RG <name>. |
| INFO | RG delete | RG <name> has been deleted. |
| INFO | RG rename | RG <name> has been renamed as <name>. |
| INFO | VD create OK | VD <name> has been created. |
| INFO | VD create fail | Failed to create VD <name>. |
| INFO | VD delete | VD <name> has been deleted. |
| INFO | VD rename | Name of VD <name> has been renamed to <name>. |
| INFO | VD read only | Cache policy of VD <name> has been set as read only. |
| INFO | VD write back | Cache policy of VD <name> has been set as write-back. |
| INFO | VD write through | Cache policy of VD <name> has been set as write-through. |
| INFO | VD extend | Size of VD <name> extends. |
| INFO | VD attach LUN OK | VD <name> has been LUN-attached. |
| INFO | VD attach LUN fail | Failed to attach LUN to VD <name>. |
| INFO | VD detach LUN OK | VD <name> has been detached. |
| INFO | VD detach LUN fail | Failed to attach LUN from bus <number>, SCSI ID <number>, lun <number>. |
| INFO | VD init started | VD <name> starts initialization. |
| INFO | VD init finished | VD <name> completes initialization. |
| WARNING | VD init failed | Failed to complete initialization of VD <name>. |
| INFO | VD rebuild started | VD <name> starts rebuilding. |
| INFO | VD rebuild finished | VD <name> completes rebuilding. |

| | | |
|---------|-----------------------------|----------------------------------------------------------------------------------------|
| WARNING | VD rebuild failed | Failed to complete rebuild of VD <name>. |
| INFO | VD migrate started | VD <name> starts migration. |
| INFO | VD migrate finished | VD <name> completes migration. |
| ERROR | VD migrate failed | Failed to complete migration of VD <name>. |
| INFO | VD scrub started | Parity checking on VD <name> starts. |
| INFO | VD scrub finished | Parity checking on VD <name> completes with <address> parity/data inconsistency found. |
| INFO | VD scrub aborted | Parity checking on VD <name> stops with <address> parity/data inconsistency found. |
| INFO | RG migrate started | RG <name> starts migration. |
| INFO | RG migrate finished | RG <name> completes migration. |
| INFO | RG move started | RG <name> starts move. |
| INFO | RG move finished | RG <name> completes move. |
| INFO | VD move started | VD <name> starts move. |
| INFO | VD move finished | VD <name> completes move. |
| ERROR | VD move failed | Failed to complete move of VD <name>. |
| INFO | VD attach LUN | LUN <number> is attached to VD <name>. |
| INFO | VD detach LUN | LUN <number> is detached from VD <name>. |
| INFO | RG activated | RG <name> has been manually activated. |
| INFO | RG deactivated | RG <name> has been manually deactivated. |
| DEBUG | VD rewrite started | Rewrite at LBA <address> of VD <name> starts. |
| DEBUG | VD rewrite finished | Rewrite at LBA <address> of VD <name> completes. |
| DEBUG | VD rewrite failed | Rewrite at LBA <address> of VD <name> failed. |
| WARNING | RG degraded | RG <name> is in degraded mode. |
| WARNING | VD degraded | VD <name> is in degraded mode. |
| ERROR | RG failed | RG <name> is failed. |
| ERROR | VD failed | VD <name> is failed. |
| ERROR | VD IO fault | I/O failure for stripe number <address> in VD <name>. |
| DEBUG | Recoverable read error | Recoverable read error occurred at LBA <address>-<address> of VD <name>. |
| WARNING | Recoverable write error | Recoverable write error occurred at LBA <address>-<address> of VD <name>. |
| DEBUG | Unrecoverable read error | Unrecoverable read error occurred at LBA <address>-<address> of VD <name>. |
| ERROR | Unrecoverable write error | Unrecoverable write error occurred at LBA <address>-<address> of VD <name>. |
| ERROR | Config read fail | Config read failed at LBA <address>-<address> of PD <slot>. |
| ERROR | Config write fail | Config write failed at LBA <address>-<address> of PD <slot>. |
| ERROR | CV boot error adjust global | Failed to change size of the global cache. |
| INFO | CV boot global | The global cache is ok. |
| ERROR | CV boot error create global | Failed to create the global cache. |
| INFO | PD dedicated spare | Assign PD <slot> to be the dedicated spare disk of RG <name>. |
| INFO | PD global spare | Assign PD <slot> to Global Spare Disks. |
| WARNING | PD read error | Read error occurred at LBA <address>-<address> of PD <slot>. |

| | | |
|---------|------------------------|---------------------------------------------------------------------------------------------------------------------|
| WARNING | PD write error | Write error occurred at LBA <address>-<address> of PD <slot>. |
| WARNING | Scrub wrong parity | The parity/data inconsistency is found at LBA <address>-<address> when checking parity on VD <name>. |
| WARNING | Scrub data recovered | The data at LBA <address>-<address> is recovered when checking parity on VD <name>. |
| WARNING | Scrub recovered data | A recoverable read error occurred at LBA <address>-<address> when checking parity on VD <name>. |
| WARNING | Scrub parity recovered | The parity at LBA <address>-<address> is regenerated when checking parity on VD <name>. |
| INFO | PD freed | PD <slot> has been freed from RG <name>. |
| INFO | RG imported | Configuration of RG <name> has been imported. |
| INFO | RG restored | Configuration of RG <name> has been restored. |
| INFO | VD restored | Configuration of VD <name> has been restored. |
| INFO | PD scrub started | PD <slot> starts disk scrubbing process. |
| INFO | Disk scrub finished | PD <slot> completed disk scrubbing process. |
| INFO | Large RG created | A large RG <name> with <number> disks included is created |
| INFO | Weak RG created | A RG <name> made up disks across <number> chassis is created |
| INFO | RG size shrunk | The total size of RG <name> shrunk |
| INFO | VD erase finished | VD <name> finished erasing process. |
| WARNING | VD erase failed | The erasing process of VD <name> failed. |
| INFO | VD erase started | VD <name> starts erasing process. |
| WARNING | RG disk missing | RG <name> cannot be activated because of missing disks. |
| ERROR | PD VD read write fault | Read error at LBA <address>-<address> of PD <slot> and rewrite failed at LBA <address>-<address> of VD <name>. |
| ERROR | PD IO retry fault | Over I/O retry limit in last 10 minutes on PD <slot>, replacing the disk is highly recommended. |
| ERROR | PD substitute L2L | Over I/O retry limit in last 10 minutes on PD <slot>, the disk is disabled for automatic rebuilding with PD <slot>. |

Snapshot Events

| Level | Type | Description |
|---------|------------------------|--------------------------------------------------------------------------------|
| WARNING | Snap mem | Failed to allocate snapshot memory for VD <name>. |
| WARNING | Snap space overflow | Failed to allocate snapshot space for VD <name>. |
| WARNING | Snap threshold | The snapshot space threshold of VD <name> has been reached. |
| INFO | Snap delete | The snapshot VD <name> has been deleted. |
| INFO | Snap auto delete | The oldest snapshot VD <name> has been deleted to obtain extra snapshot space. |
| INFO | Snap take | A snapshot on VD <name> has been taken. |
| INFO | Snap set space | Set the snapshot space of VD <name> to <number> MB. |
| INFO | Snap rollback started | Snapshot rollback of VD <name> has been started. |
| INFO | Snap rollback finished | Snapshot rollback of VD <name> has been finished. |
| WARNING | Snap quota reached | The quota assigned to snapshot <name> is reached. |
| INFO | Snap clear space | The snapshot space of VD <name> is cleared |

iSCSI Events

| Level | Type | Description |
|-------|-----------------------------|---------------------------------------------------------|
| INFO | iSCSI login <u>accepted</u> | iSCSI login from <IP> succeeds. |
| INFO | iSCSI login rejected | iSCSI login from <IP> was rejected, reason [<string>] |
| INFO | iSCSI logout recvd | iSCSI logout from <IP> was received, reason [<string>]. |

Battery Backup Events

| Level | Type | Description |
|---------|----------------------------|-------------------------------------------------------------------------------|
| INFO | BBM start syncing | Abnormal shutdown detected, start flushing battery-backed data (<number> KB). |
| INFO | BBM stop syncing | Abnormal shutdown detected, flushing battery-backed data finished |
| INFO | BBM installed | Battery backup module is detected |
| INFO | BBM status good | Battery backup module is good |
| INFO | BBM status <u>charging</u> | Battery backup module is charging |
| WARNING | BBM status fail | Battery backup module is failed |
| INFO | BBM enabled | Battery backup feature is <string>. |
| INFO | BBM inserted | Battery backup module is inserted |
| INFO | BBM removed | Battery backup module is removed |

JBOD Events

| Level | Type | Description |
|---------|---------------------|-------------------------------------------------------------------------------------------------------------|
| INFO | PD upgrade started | JBOD <name> PD [<string>] starts upgrading firmware <u>process.</u> |
| INFO | PD upgrade finished | JBOD <name> PD [<string>] finished upgrading firmware process. |
| WARNING | PD upgrade failed | JBOD <name> PD [<string>] upgrade firmware failed. |
| INFO | PD freed | JBOD <name> PD <slot> has been freed from RG <name>. |
| INFO | PD inserted | JBOD <name> disk <slot> is inserted into system. |
| Warning | PD removed | JBOD <name> disk <slot> is removed from system. |
| ERROR | HDD read error | JBOD <name> disk <slot> read block error |
| ERROR | HDD write error | JBOD <name> disk <slot> write block error |
| ERROR | HDD error | JBOD <name> disk <slot> is disabled. |
| ERROR | HDD IO timeout | JBOD <name> disk <slot> gets no response |
| INFO | JBOD inserted | JBOD <name> is inserted into system |
| WARNING | JBOD removed | JBOD <name> is removed from system |
| WARNING | JBOD SMART T.E.C | JBOD <name> disk <slot>: S.M.A.R.T. Threshold Exceed <u>Condition occurred for attribute <string></u> |
| WARNING | JBOD SMART fail | JBOD <name> disk <slot>: Failure to get S.M.A.R.T <u>information</u> |
| INFO | JBOD CTR inserted | Controller(<number>) of JBOD <name> is inserted <u>into system</u> |
| WARNING | JBOD CTR is removed | Controller(<number>) of JBOD <name> is removed from system |
| WARNING | JBOD degraded | JBOD <name> is in degraded mode. |
| INFO | PD dedicated spare | Assign JBOD <name> PD <slot> to be the dedicated spare <u>disk of RG <name>.</u> |

| | | |
|---------|------------------------|----------------------------------------------------------------------------------------------------------------------------|
| INFO | PD global spare | Assign JBOD <name> PD <slot> to Global Spare Disks. |
| ERROR | Config read fail | Config read error occurred at LBA <address>-<address> of JBOD <name> PD <slot>. |
| ERROR | Config write fail | Config write error occurred at LBA <address>-<address> of JBOD <name> PD <slot>. |
| DEBUG | PD read error | Read error occurred at LBA <address>-<address> of JBOD <name> PD <slot>. |
| WARNING | PD write error | Write error occurred at LBA <address>-<address> of JBOD <name> PD <slot>. |
| INFO | PD scrub started | JBOD <name> PD <slot> starts disk scrubbing process. |
| INFO | PD scrub completed | JBOD <name> PD <slot> completed disk scrubbing process. |
| WARNING | PS fail | Power Supply of <string> in JBOD <name> is FAIL |
| INFO | PS normal | Power Supply of <string> in JBOD <name> is NORMAL |
| WARNING | FAN fail | Cooling fan of <string> in JBOD <name> is FAIL |
| INFO | FAN normal | Cooling fan of <string> in JBOD <name> is NORMAL |
| WARNING | Volt warn OV | Voltage of <string> read as <string> in JBOD <name> is WARN OVER |
| WARNING | Volt warn UV | Voltage of <string> read as <string> in JBOD <name> is WARN UNDER |
| WARNING | Volt crit OV | Voltage of <string> read as <string> in JBOD <name> is CRIT OVER |
| WARNING | Volt crit UV | Voltage of <string> read as <string> in JBOD <name> is CRIT UNDER |
| INFO | Volt recovery | Voltage of <string> in JBOD <string> is NORMAL |
| WARNING | Therm warn OT | Temperature of <string> read as <string> in JBOD <name> is OT WARNING |
| WARNING | Therm warn UT | Temperature of <string> read as <string> in JBOD <name> is UT WARNING |
| WARNING | Therm fail OT | Temperature of <string> read as <string> in JBOD <name> is OT FAILURE |
| WARNING | Therm fail UT | Temperature of <string> read as <string> in JBOD <name> is UT FAILURE |
| INFO | Therm recovery | Temperature of <string> in JBOD <name> is NORMAL |
| INFO | JBOD HDD path NG | Path redundancy to JBOD <name> PD <number> is lost |
| INFO | PD RPS started L2F | Assign JBOD <name> PD <slot> to replace PD <slot>. |
| INFO | PD RPS started F2L | Assign PD <slot> to replace JBOD <name> PD <slot>. |
| INFO | PD RPS started F2F | Assign JBOD <name> PD <slot> to replace JBOD <name> PD <slot>. |
| INFO | PD RPS finished L2F | PD <slot> is replaced by JBOD <name> PD <slot>. |
| INFO | PD RPS finished F2L | JBOD <name> PD <slot> is replaced by PD <slot>. |
| INFO | PD RPS finished F2F | JBOD <name> PD <slot> is replaced by JBOD <name> PD <slot>. |
| ERROR | PD RPS failed L2F | Failed to replace PD <slot> with JBOD %4d PD <slot>. |
| ERROR | PD RPS failed F2L | Failed to replace JBOD <name> PD <slot> with PD <slot>. |
| ERROR | PD RPS failed F2F | Failed to replace JBOD <name> PD <slot> with JBOD <name> PD <slot>. |
| ERROR | PD VD read write fault | Read error at LBA <address>-<address> of JBOD <name> PD <slot> and rewrite failed at LBA <address>-<address> of VD <name>. |

| | | |
|-------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| ERROR | PD IO retry fault | Over I/O retry limit in last 10 minutes on JBOD <name> PD <slot>, replacing the disk is highly recommended. |
| ERROR | PD substitute L2F | Over I/O retry limit in last 10 minutes on PD <slot>, the disk is disabled for automatic rebuilding with JBOD <name> PD <slot>. |
| ERROR | PD substitute F2L | Over I/O retry limit in last 10 minutes on JBOD <name> PD <slot>, the disk is disabled for automatic rebuilding with PD <slot>. |
| ERROR | PD substitute F2F | Over I/O retry limit in last 10 minutes on JBOD <name> PD <slot>, the disk is disabled for automatic rebuilding with JBOD <name> PD <slot>. |

System Maintenance Events

| Level | Type | Description |
|---------|-------------------------|-------------------------------------------------------|
| INFO | System shutdown | System shutdown. |
| INFO | System reboot | System reboot. |
| INFO | System console shutdown | System shutdown from <string> via Console UI |
| INFO | System web shutdown | System shutdown from <string> via Web UI |
| INFO | System button shutdown | System shutdown via power button |
| INFO | System LCM shutdown | System shutdown via LCM |
| INFO | System console reboot | System reboot from <string> via Console UI |
| INFO | System web reboot | System reboot from <string> via Web UI |
| INFO | System LCM reboot | System reboot via LCM |
| INFO | FW upgrade start | System firmware upgrade starts. |
| INFO | FW upgrade success | System firmware upgrade succeeds. |
| WARNING | FW upgrade failure | System firmware upgrade is failed. |
| ERROR | IPC FW upgrade timeout | System firmware upgrade timeout on another controller |
| INFO | Config imported | <string> config imported |

HAC Events

| Level | Type | Description |
|-------|-------------------------|---------------------------------------------------------------------------|
| INFO | RG owner changed | The preferred owner of RG <name> has been changed to controller <number>. |
| INFO | Force CTR write through | Controller <number> forced to adopt write-through mode on failover. |
| INFO | Restore CTR cache mode | Controller <number> restored to previous caching mode on failback. |
| INFO | Failover complete | All volumes in controller <number> completed failover process. |
| INFO | Failback complete | All volumes in controller <number> completed failback process. |
| INFO | CTR inserted | Controller <number> is inserted into system |

| | | |
|-------|--------------------|----------------------------------------------------------------|
| ERROR | CTR removed | Controller <number> is removed from system |
| ERROR | CTR timeout | Controller <number> gets no response |
| ERROR | CTR lockdown | Controller <number> is locked down |
| ERROR | CTR memory NG | Memory size mismatch |
| ERROR | CTR firmware NG | Firmware version mismatch |
| ERROR | CTR lowspeed NG | Low speed inter link is down |
| ERROR | CTR highspeed NG | High speed inter link is down |
| ERROR | CTR backend NG | SAS expander is down |
| ERROR | CTR frontend NG | FC IO controller is down |
| INFO | CTR reboot FW sync | Controller reboot, reason [Firmware synchronization completed] |

Clone Events

| Level | Type | Description |
|---------|--------------------|--------------------------------------------------------------|
| INFO | VD clone started | VD <name> starts cloning process. |
| INFO | VD clone finished | VD <name> finished cloning process. |
| WARNING | VD clone failed | The cloning in VD <name> failed. |
| INFO | VD clone aborted | The cloning in VD <name> was aborted. |
| INFO | VD clone set | The clone of VD <name> has been designated. |
| INFO | VD clone reset | The clone of VD <name> is no longer designated. |
| WARNING | Auto clone error | Auto clone task: <string>. |
| WARNING | Auto clone no snap | Auto clone task: Snapshot <name> is not found for VD <name>. |

QReplica Events

| Level | Type | Description |
|---------|---------------------------|-----------------------------------------------------------------|
| INFO | Qrep portal enabled | Replication portal is enabled |
| INFO | Qrep portal disabled | Replication portal is disabled |
| INFO | VD replicate started | VD <name> starts replication process. |
| INFO | VD replicate finished | VD <name> finished replication process. |
| WARNING | VD replicate failed | The replication in VD <name> failed. |
| INFO | VD replicate aborted | The replication in VD <name> was aborted. |
| INFO | VD set as replica | VD <name> has been configured as a replica. |
| INFO | VD set as RAID | VD <name> has been configured as a RAID volume. |
| INFO | VD replica set | The replica of VD <name> has been designated. |
| INFO | VD replica reset | The replica of VD <name> is no longer designated. |
| WARNING | Auto qrep not enable | Auto QReplica task: QReplica is not enabled for VD <name>. |
| WARNING | Auto qrep error | Auto QReplica task: <string>. |
| WARNING | Auto qrep no snap | Auto QReplica task: Snapshot <name> is not found for VD <name>. |
| INFO | Source replicate started | Remote VD <name> starts replicating to VD <name>. |
| INFO | Source replicate finished | Remote VD <name> finished replication to VD <name>. |

| | | | |
|------|-------------------|-----------|----------------------------------------------------|
| INFO | Source failed | replicate | Remote VD <name> failed replication to VD <name>. |
| INFO | Source aborted | replicate | Remote VD <name> aborted replication to VD <name>. |

QThin Events

| Level | Type | Description |
|---------|--------------------|----------------------------------------------------------|
| WARNING | RG threshold hit | The used capacity of RG <name> exceeds <number> percent. |
| INFO | RAID set created | RAID set <number> has been added into RG <name>. |
| INFO | RAID set deleted | RAID set <number> was deleted from RG <name>. |
| INFO | VD reclaim started | VD <name> starts space reclamation process. |
| INFO | VD completed | VD <name> finished space reclamation process. |
| WARNING | VD aborted | The space reclamation in VD <name> was aborted. |

- DEBUG level events are displayed in download event log file only.

Glossary and Acronym List

Common Terminology

| Item | Description |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RAID | Redundant Array of Independent Disks. There are different RAID levels with different degree of data protection, data availability, and performance to host environment. |
| PD | The Physical Disk belongs to the member disk of one specific RAID group. |
| RG | Raid Group. A collection of removable media. One RAID group consists of a set of virtual disks and owns one RAID level attribute. |
| VD | Virtual Disk. Each RAID group could be divided into several virtual disks. The virtual disks from one RAID group have the same RAID level, but may have different volume capacity. |
| LUN | Logical Unit Number. A logical unit number (LUN) is a unique identifier which enables it to differentiate among separate devices (each one is a logical unit). |
| GUI | Graphic User Interface. |
| RAID cell | When creating a RAID group with a compound RAID level, such as 10, 30, 50 and 60, this field indicates the number of subgroups in the RAID group. For example, 8 disks can be grouped into a RAID group of RAID 10 with 2 cells, 4 cells. In the 2-cell case, PD {0, 1, 2, 3} forms one RAID 1 subgroup and PD {4, 5, 6, 7} forms another RAID 1 subgroup. In the 4-cells, the 4 subgroups are physical disk {0, 1}, physical disk {2, 3}, physical disk {4, 5} and physical disk {6,7}. |
| WT | Write-Through cache-write policy. A caching technique in which the completion of a write request is not signaled until data is safely stored in non-volatile media. Each data is synchronized in both data cache and accessed physical disks. |
| WB | Write-Back cache-write policy. A caching technique in which the completion of a write request is signaled as soon as the data is in cache and actual writing to non-volatile media occurs at a later time. It speeds up system write performance but needs to bear the risk where data may be inconsistent between data cache and the physical disks in one short time interval. |
| RO | Set the volume to be Read-Only. |
| DS | Dedicated Spare disks. The spare disks are only used by one specific RAID group. Others could not use these dedicated spare disks for any rebuilding purpose. |
| LS | Local Spare disks. The spare disks are only used by the RAID groups of the local enclosure. Other enclosure could not use these local spare disks for any rebuilding purpose. |
| GS | Global Spare disks. It is shared for rebuilding purpose. If some RAID groups need to use the global spare disks for rebuilding, they could get the spare disks out from the common spare disks pool for such requirement. |
| DG | DeGraded mode. Not all of the array's member disks are functioning, but |

| | |
|------------|-------------------------------------------------------------------------------------------|
| | the array is able to respond to application read and write requests to its virtual disks. |
| SCSI | Small Computer Systems Interface |
| SAS | Serial Attached SCSI |
| S.M.A.R.T. | Self-Monitoring Analysis and Reporting Technology |
| WWN | World Wide Name |
| HBA | Host Bus Adapter |
| SES | SCSI Enclosure Services |
| NIC | Network Interface Card |
| BBM | Battery Backup Module |

FC / iSCSI / SAS Terminology

| Item | Description |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| FC | Fibre Channel |
| FC-P2P | Point-to-Point |
| FC-AL | Arbitrated Loop |
| FC-SW | Switched Fabric |
| iSCSI | Internet Small Computer Systems Interface |
| LACP | Link Aggregation Control Protocol |
| MPIO | Multi-Path Input/Output |
| MC/S | Multiple Connections per Session |
| MTU | Maximum Transmission Unit |
| CHAP | Challenge Handshake Authentication Protocol. An optional security mechanism to control access to an iSCSI storage system over the iSCSI data ports. |
| iSNS | Internet Storage Name Service |
| SAS | Serial Attached SCSI |

Dual Controller Terminology

| Item | Description |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SBB | Storage Bridge Bay. The objective of the Storage Bridge Bay Working Group (SBB) is to create a specification that defines mechanical, electrical and low-level enclosure management requirements for an enclosure controller slot that will support a variety of storage controllers from a variety of independent hardware vendors (“IHVs”) and system vendors. |
| 6G MUX | Bridge board is for SATA II disk to support dual controller mode. |

J

| | |
|------------------------|-----|
| JBOD Expansion | 140 |
| Connecting JBOD | 140 |
| Upgrade Firmware | 142 |
| Jumbo Frame | 88 |

L

| | |
|------------------------------------------------|---------------|
| LACP (Link Aggregation Control Protocol) | 86, 144 |
| LCM (LCD Control Module) | 19, 21, 64 |
| Log and Alert Settings | 83 |
| Admin Interface and Front Display Alerts | 85 |
| Device Buzzer | 85 |
| SNMP Trap Settings | 84 |
| System Server Settings | 84 |
| Windows Messenger | 84 |
| Logical Units | 112 |
| Attach LUN..... | 107, 110, 113 |
| Detach LUNs..... | 107, 110, 113 |
| List LUNs..... | 107, 110 |
| Login Settings..... | 81 |
| Auto Logout | 82 |
| Change Admin Password | 82 |
| Change User Password..... | 82 |
| Login Lock | 82 |
| LUN (Logical Unit Number) | 112 |

M

| | |
|-----------------------------------------------|----------|
| MC/S (Multiple Connections per Session) | 143, 163 |
| MPIO (Multi Path Input/Output) | 142, 162 |
| MTU (Maximum Transmission Unit)..... | 88 |

N

| | |
|-----------------------------------|----|
| Network Settings | 80 |
| DNS Server Address | 81 |
| Enable dual management ports..... | 81 |
| IP Address | 81 |
| MAC Address | 81 |
| Service Ports | 81 |
| Network Setup..... | 85 |
| Disable Jumbo Frames | 88 |
| Enable Jumbo Frames | 88 |
| iSCSI Bonding Settings..... | 86 |
| iSCSI IP Address Settings..... | 87 |
| Make Default Gateway..... | 88 |
| Ping Host..... | 88 |
| Remove Default Gateway | 88 |
| Reset Port..... | 88 |
| Set VLAN ID | 87 |
| NTP (Network Time Protocol) | 80 |

P

| | |
|---------------------------------|-----|
| PCP (Priority Code Point) | 87 |
| Performance Monitor..... | 128 |
| Physical Disks | 98 |
| Disk Check Report | 99 |
| Disk Health Check | 99 |
| Disk Scrub..... | 99 |
| More Information | 99 |
| Read Error Cleared..... | 99 |
| Set Dedicated Spare | 99 |

| | |
|----------------------------------|----|
| Set Free Disk | 99 |
| Set Global Spare | 99 |
| Set Local Spare..... | 99 |
| Turn off the Indication LED..... | 99 |
| Turn on the Indication LED..... | 99 |
| Upgrade | 99 |

Q

| | |
|---------------------------------------------------|----------|
| QReplica Options | |
| Restart the task an hour later if it failed | 166 |
| Snapshot Space..... | 165 |
| Threshold..... | 165 |
| QReplicas..... | 114, 158 |
| Add Connection..... | 115, 163 |
| Add Path | 115, 162 |
| Change QReplica Options | 166 |
| Create | 115, 159 |
| Delete | 115, 166 |
| Delete Connection | 115, 163 |
| Delete Path | 162 |
| QReplica Options | 115, 165 |
| Rebuild | 115 |
| Schedule | 115, 164 |
| Set Task Shaping | 115, 163 |
| Shaping Setting Configuration | 115, 163 |
| Start | 115, 162 |
| Stop | 115, 162 |
| QThin..... | 134 |
| Space Reclamation | 107 |
| Quick Installation..... | 69 |

R

| | |
|----------------------------------|----------|
| RAID Concepts..... | 39 |
| RAID Group Policy | |
| Delete | 103 |
| Modify | 103 |
| RAID Groups..... | 100 |
| Activate | 101 |
| Add Policy..... | 102 |
| Add RAID Set | 102 |
| Change Preferred Controller..... | 101 |
| Change RAID Options..... | 101 |
| Create | 101 |
| Deactivate..... | 101 |
| Delete | 101 |
| Migrate RAID Level..... | 101, 131 |
| More Information | 102 |
| Move RAID Level | 101, 131 |
| Verify Parity | 101 |
| RAID Levels..... | 39 |
| RAID Set | |
| List Disks..... | 103 |
| Move RAID Level..... | 103 |
| Remove | 103 |
| Reboot and Shutdown | 127 |
| Replication | 114, 158 |
| Reset to Factory Defaults | 125 |

S

| | |
|---------------------------------------------------------------------|-----|
| S.M.A.R.T. (Self-Monitoring Analysis and Reporting Technology)..... | 120 |
| SAS (Serial Attached SCSI) | 42 |
| SAS Concepts | 42 |

Serial Console..... 63

SES (SCSI Enclosure Services)..... 119

 Disable 119

 Enable 119

Snapshots..... 109, 148

 Attach LUN..... 107, 110, 113

 Cleanup Snapshots 107, 110, 150

 Constraint..... 152

 Delete 110

 Detach LUNs..... 107, 110, 113

 List LUNs..... 107, 110

 List Snapshots 107

 Rollback 110, 151

 Schedule Snapshots..... 107, 110, 151

 Set Quota..... 110

 Set Snapshot Space 107, 110

 Take a Snapshot 107, 110, 149

 Unexpose..... 110

SSD Caching 171

 Active License..... 124, 176

 Configuration 176

 Constraint..... 177

 I/O Type 174

 Methodology 171

 Populating the Cache..... 172

 Read/Write Cache Cases 172

 Solution 171

SSH (Secure Shell) 63

System Configuration 79

System Information 120

 Download System Information..... 121

System Installation and Deployment 46

System Maintenance..... 120

System Settings 79

 Date and Time 80

 System Identification..... 80

 System Name 80

T

Technical Support..... 3

Thin Provisioning 134

Trunking 86, 145

U

UL Statement..... 5

Upgrade 123

 Controller Mode..... 124, 147

Controller Module Firmware Update..... 124

JBOD Firmware Update 124, 142

SSD Caching License 124

UPS (Uninterruptible Power Supply)..... 118

V

Virtual Disks 105

 Attach LUN 107, 110, 113

 Change QReplica Options 107

 Cleanup Snapshots..... 107, 110

 Clear Clone..... 107

 Cloning Options 106

 Create 106

 Delete 106

 Detach LUNs 107, 110, 113

 Extend..... 106, 133

 List LUNs 107, 110

 List Snapshots..... 107

 More Information 107

 Schedule Clone..... 107

 Schedule Snapshots 107, 110

 Set Clone 107

 Set Properties..... 106

 Set Snapshot Space..... 107, 110

 Set SSD Caching 106

 Space Reclamation 107

 Start Clone..... 107

 Stop Clone..... 107

 Take a Snapshot..... 107, 110

 Verify Parity 106

VLAN ID 87

Volume Configuration 98

Volume Creation Wizard 74

Volume Rebuild..... 130

Volume Recovery 130

Volume Relationship 40

Volume Restoration 126

 Restore..... 127

VSS (Volume Shadow copy Service) 193

 Installation..... 193

 VSS Client..... 196

W

Web UI (Web User Interface) 66

WWNN (World Wide Node Name)..... 95

WWPN (World Wide Port Name) 95